




## 摇臂开关

详细产品规格 - 请点击 [cn.100y.com.tw](http://cn.100y.com.tw)



规定值
6A 125V AC
3A 250V AC
接点阻抗
50ohm Max
绝缘电阻
DC 500V 100ohm Min
耐电压
AC 1500V 1 minute
Cut-out

TERMINAL
0 5  S0

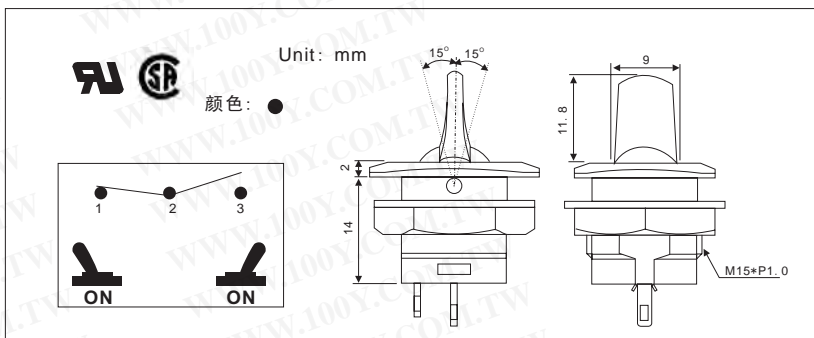


100Y 编号	厂商编号	说明	No. of Pos.	耐压/电流值	颜色	Type
14138	R13-402C-05	摇臂开关	3P SPDT	6A125VAC/3A250VAC	黑柄/黑底	SPDT ON-ON



规定值
6A 125V AC
3A 250V AC
接点阻抗
50ohm Max
绝缘电阻
DC 500V 100ohm Min
耐电压
AC 1500V 1 minute
Cut-out

TERMINAL
0 5  S0

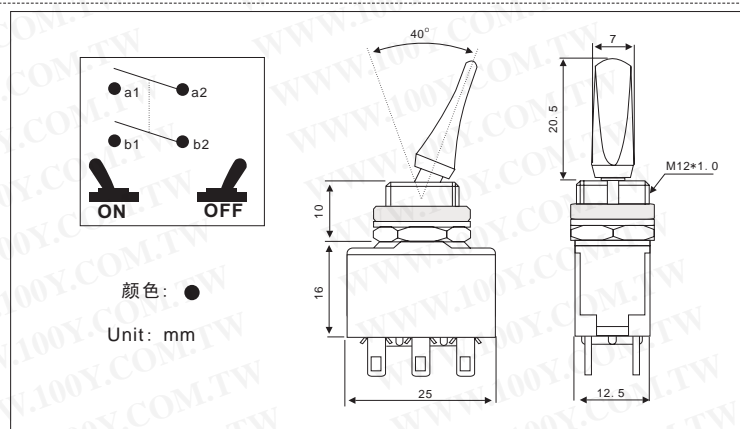


100Y 编号	厂商编号	说明	No. of Pos.	耐压/电流值	颜色	Type
14282	R13-406F2-05	摇臂开关	4P/SO Solder	6A/125V 3A/250V	金属柄/黑底	DPST ON-OFF




规定值
6A 125V AC
3A 250V AC
接点阻抗
50ohm Max
绝缘电阻
DC 500V 100ohm Min
耐电压
AC 1500V 1 minute
Cut-out

TERMINAL
0 2  .187" SQ

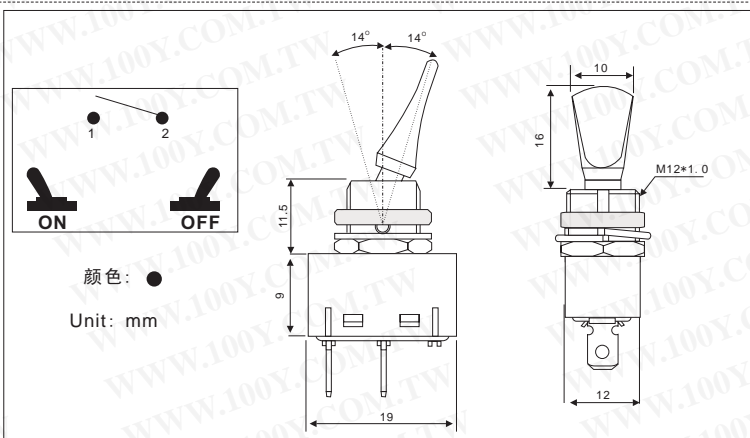

100Y 编号	厂商编号	说明	No. of Pos.	耐压/电流值	颜色	Type
14407	R13-412A1-HWR	摇臂开关	2P SPDT 4.8*0.8t Quick connect	10A125VAC/6A250VAC	黑柄/黑底	SPST ON-OFF

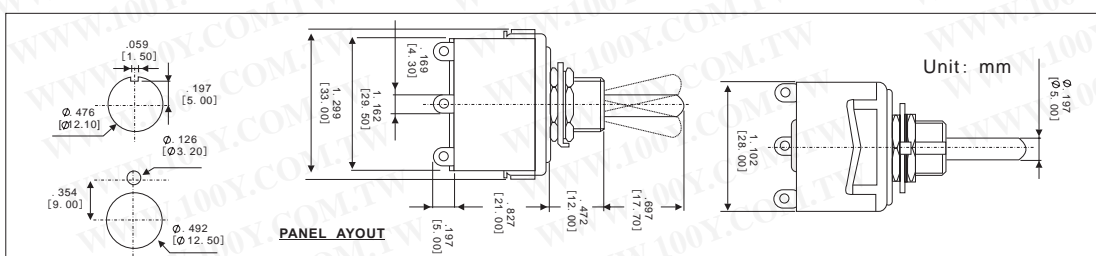

100Y 编号	厂商编号	说明	No. of Pos.	耐压/电流值	Type
5650	Y7033-K1C3T1	摇臂开关	9P3	10A/250Vac	ON-OFF-ON



服务专线: 台湾: 886-3-5753170  
 传 真: 台湾: 886-3-5753172  
 E-mail: 台湾: sale@100y.com.tw

深圳: 86-755-83298787  
 深圳: 86-755-83640655  
 深圳: 100y@163.com

上海: 86-21-34970699  
 上海: 86-21-64605107  
 上海: 100y-1@163.com