




DIN 41612连接头/座

2.54mm DIN 41612 连接(头)座

详细产品规格 - 请点击 cn.100y.com.tw


D31-1

特性:
 额定电流: 2 AMP.
 额定电压: AC 1000Vfor 1 minute.
 绝缘电阻: 1000M Ω min. At DC500V.
 接触电阻: 30m Ω max. At DC 100 mA.
 温度范围:-55 $^{\circ}$ C~105 $^{\circ}$ C
 材料:
 Housing: 30% Glass filled PBTUL94-10.
 接触件材料:磷青铜

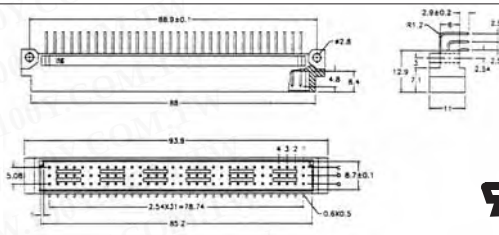


D31-ABC

特性:
 额定电流: 2 AMP.
 额定电压: AC 1000Vfor 1 minute.
 绝缘电阻: 1000M Ω min. At DC500V.
 接触电阻: 30m Ω max. At DC 100 mA.
 温度范围:-55 $^{\circ}$ C~105 $^{\circ}$ C
 材料:
 Housing: 30% Glass filled PBT UL94-0.
 接触件材料: 黄铜

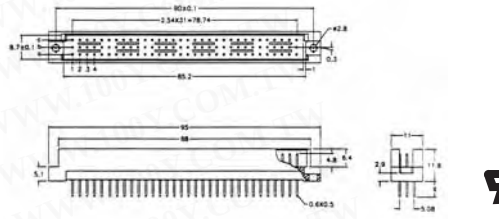


D37-ABC

特性:
 额定电流: 2 AMP.
 额定电压: AC 1000Vfor 1 minute.
 绝缘电阻: 1000M Ω min. At DC500V.
 接触电阻: 30m Ω max. At DC 100 mA.
 温度范围:-55 $^{\circ}$ C~105 $^{\circ}$ C
 材料:
 Housing: 30% Glass filled PBT UL94-0.
 接触件材料: 黄铜

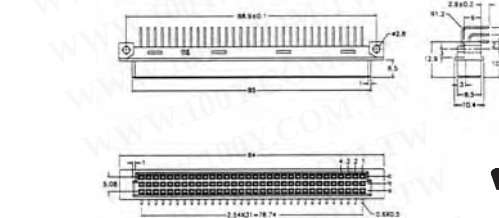


D35-ABC

特性:
 额定电流: 2 AMP.
 额定电压: AC 1000Vfor 1 minute.
 绝缘电阻: 1000M Ω min. At DC500V.
 接触电阻: 30m Ω max. At DC 100 mA.
 温度范围:-55 $^{\circ}$ C~105 $^{\circ}$ C
 材料:
 Housing: 30% Glass filled PBT UL94-0.
 接触件材料: 磷青铜

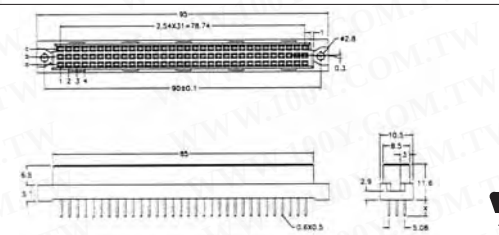
D32
D40

特性:
 额定电流: 2 AMP.
 额定电压: AC 1000Vfor 1 minute.
 绝缘电阻: 1000M Ω min. At DC500V.
 接触电阻: 30m Ω max. At DC 100 mA.
 温度范围:-55 $^{\circ}$ C~105 $^{\circ}$ C
 材料:
 Housing: 30% Glass filled PBT UL
 接触件材料: 黄铜

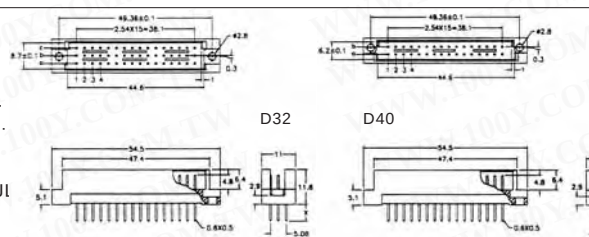

D35-F

特性:
 额定电流: 2 AMP.
 额定电压: AC 1000Vfor 1 minute.
 绝缘电阻: 1000M Ω min. At DC500V.
 接触电阻: 30m Ω max. At DC 100 mA.
 温度范围:-55 $^{\circ}$ C~105 $^{\circ}$ C
 材料:
 Housing: 30% Glass filled PBT UL94-0.
 接触件材料: 磷青铜

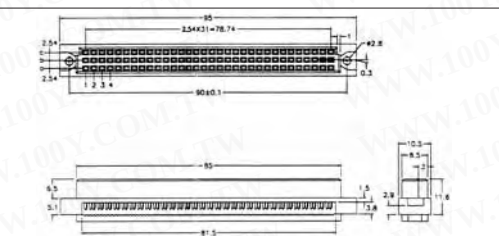


100Y 编号	厂商编号	说明	公/母 头/座	90°/180°	2/3 row body	插脚	On board
22248	D31-1	DIN41612 公座 64P	公座	180°			
11281	D31-ABC	DIN41612 公座	公座	180°	三排	96P	ABC
14621	D32	DIN41612 公座	公座	180°	三排	48P	ABC
23234	D34	DIN41612 母座	母座	90°	三排	48P	ABC
18688	D35-1	DIN41612 母座	母座	180°	二排	64P	ABC
11282	D35-ABC	DIN41612 母座	母座	180°	三排	96P	ABC
12060	D35-F	DIN41612 180° 压排母座 64P AC	母头	--	三排	64P	AC
11258	D37-ABC	DIN41612 90°母座	母座	90°	三排	96P	ABC
14623	D40	DIN41612 公头	公头	180°	二排	32P	AB






特性:
额定电流: 2 AMP.
额定电压: AC 1000Vfor 1 minute.
绝缘电阻: 1000M Ω min. At DC500V.
接触电阻: 30m Ω max. At DC 100 mA.
温度范围: -55 $^{\circ}$ C~105 $^{\circ}$ C
材料:
Housing: 30% Glass filled PBT UL94-0.
接触件材料: 磷青铜


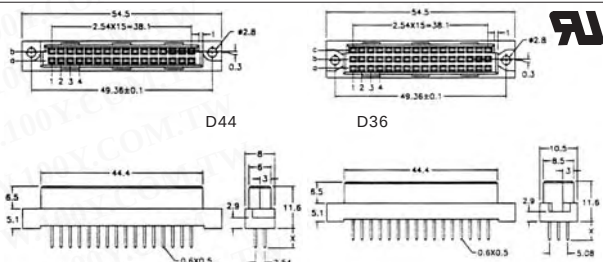
D44
D36

特性:
额定电流: 2 AMP.
额定电压: AC 1000Vfor 1 minute.
绝缘电阻: 1000M Ω min. At DC500V.
接触电阻: 30m Ω max. At DC 100 mA.
温度范围: -55 $^{\circ}$ C~105 $^{\circ}$ C
材料:
Housing: 30% Glass filled PBT UL94-0.
接触件材料: 黄铜

D31-1

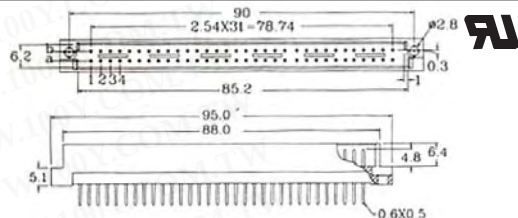

特性:
额定电流: 2 AMP.
额定电压: AC 1000Vfor 1 minute.
绝缘电阻: 1000M Ω min. At DC500V.
接触电阻: 30m Ω max. At DC 100 mA.
温度范围: -55 $^{\circ}$ C~105 $^{\circ}$ C
材料:
Housing: 30% Glass filled PBT UL94-0.
接触件材料: 磷青铜

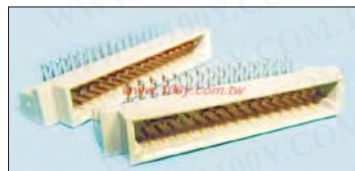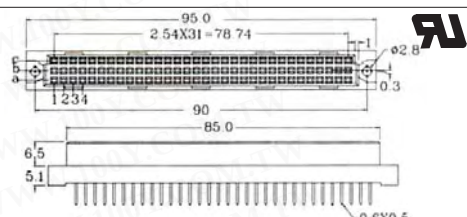D34
D43

D42



D41




D33-ABC

特性:
额定电流: 2 AMP.
额定电压: AC 1000Vfor 1 minute.
绝缘电阻: 1000M Ω min. At DC500V.
接触电阻: 30m Ω max. At DC 100 mA.
温度范围: -55 $^{\circ}$ C~105 $^{\circ}$ C
材料:
Housing: 30% Glass filled PBT UL94-0.
接触件材料: 磷青铜


100Y 编号	厂商编号	说明	公/母 头/座	90°/180°	2/3 row body	插脚	On board
22248	D31-1	DIN41612 公座 64P	公座	180°			
20332	D33-ABC	DIN41612 公座	公座	90°	三排	96P	ABC
23234	D34	DIN41612 母座	母座	90°	三排	48P	ABC
14622	D36	DIN41612 母座 48P	母座	180°	三排	48P	ABC
14623	D40	DIN41612 公头	公头	180°	二排	32P	AB
23232	D41	DIN41612 公座	公座	90°	二排	64P	AB
23813	D42	DIN41612 母座 32P	母座	180°	二排	32P	AB
23233	D43	DIN41612 母座	母座	180°	二排	64P	AB
14624	D44	DIN41612 母座 32P	母座	180°	二排	32P	AB

PCB连接座 (Solt)

2.54mm 插板式SOLT 母座 180

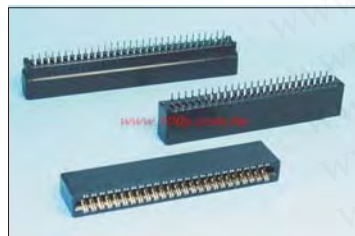详细产品规格 - 请点击 cn.100y.com.tw

特性:
额定电流: 3A
角点材料: 磷青铜
触点镀层: 镍-局部镀金
接触电阻: $\leq 20\text{m}\Omega$
插入力: 每对触点 $\leq 4\text{N}$
拔出: 每对触点 $\leq 0.3\text{N}$
温度范围: -55 $^{\circ}$ C~+120 $^{\circ}$ C

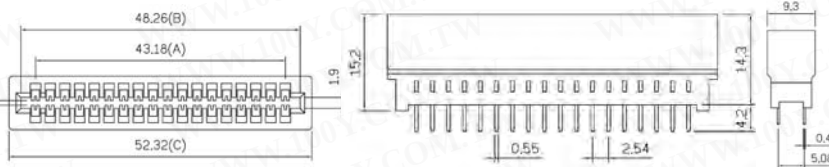

100Y 编号	厂商编号	说明	Contact Centers	Mounting Ears Yes/No	插脚
39679	B22	插板式 SOLT	Tin	No	180
2919	B23	插板式 SOLT 2*18Pins	Tin	No	36
2922	B24	插板式 SOLT 2*22Pins	Tin	No	44
39739	B24-1	插板式 SOLT 2*22Pins	Tin	No	48
4147	B25	插板式 SOLT 2*25Pins	Tin	No	50
4148	B26	插板式 SOLT 2*31Pins	Tin	No	62
4150	B27	插板式 SOLT 2*36Pins	Tin	No	72
12545	B27-1	插板式 SOLT 2*35Pins	Tin	NO	70
4149	B28	插板式 SOLT 2*49Pins	Tin	No	98
2310	B29	插板式 SOLT 2*50Pins	Tin	No	100
14413	B30	插板式 SOLT 2*60Pins	Tin	No	120
17469	B38	插板式 SOLT	Tin	No	180



服务专线: 台湾: 886-3-5753170
传 真: 台湾: 886-3-5753172

E-mail: sale@100y.com.tw

深圳: 86-755-83298787

深圳: 86-755-83640655

深圳: 100y@163.com

上海: 86-21-34970699

上海: 86-21-64605107

上海: 100y-1@163.com

10-2




2. 54mm 插板式SOLT 母座 90

详细产品规格 - 请点击 cn.100y.com.tw

B31-2

特性:


额定电流: 3 AMP. Max
 额定电压: 1000V AC R. M. S /min
 绝缘电阻: 5000M Ω min. At 1000V
 接触电阻: 30m Ω max.
 温度范围: -55 $^{\circ}$ C~+105 $^{\circ}$ C



B53

材料:

Housing: PBT (UL 94V-0.)
 颜色: 黑色
 接触件材料: 磷青铜
 端子: 铜合金
 表面: 镀金 (t=0.40MM)

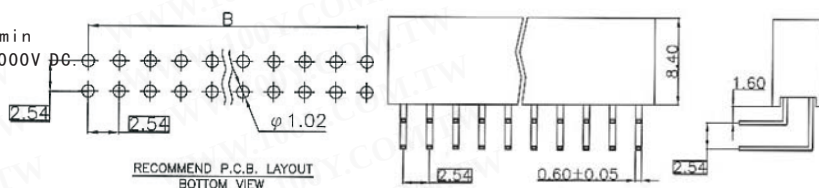


100Y 编号	厂商编号	说明	插脚
22495	B31-2	插板式 SOLT 90 $^{\circ}$	20*2P
22494	B53	插板式 SOLT 10*2pins	10*2pins

2. 54mm 压排式SOLT 母头



特性:


额定电流: 3 A
 绝缘电阻: 5000M Ω min.
 接触电阻: 20m Ω max.
 温度范围: -45 $^{\circ}$ C~+105 $^{\circ}$ C
 接触材质: 磷青铜
 绝缘材质: P. B. T UL 94 V-0
 D02-60P

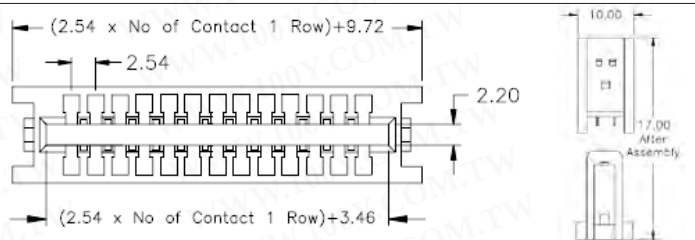

说明:



温度范围: -55 $^{\circ}$ C~+105 $^{\circ}$ C
 额定电压:
 1000Vrms at Sea Level
 绝缘电阻:
 >1x109 Ω at 500VDC
 额定电流: 1 A

3463-0001 3358-0001

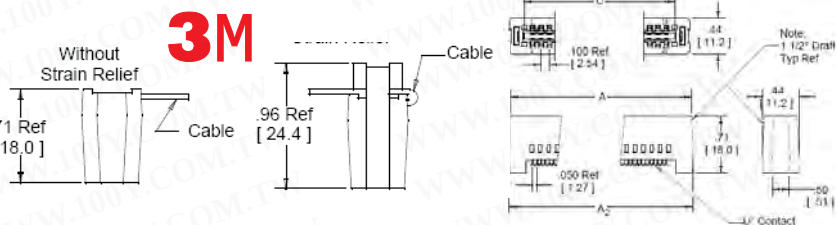

100Y 编号	厂商编号	制造厂商	说明	插脚
28926	3358-0001	3M	3M 压排母头/SLOT	10P
28927	3463-0001	3M	3M 压排母头/SLOT	34P
3811	D02-16P		压排母头/SLOT 16P	2*8P
4158	D02-20P		压排母头/SLOT 20P	2*10P
4163	D02-26P		压排母头/SLOT 26P	2*13P
4164	D02-34P		压排母头/SLOT 34P	2*17P
4165	D02-40P		压排母头/SLOT 40P	2*20P
4166	D02-50P		压排母头/SLOT 50P	2*25P
4167	D02-60P		压排母头/SLOT 60P	2*30P
2367	D02-62P		压排母头/SLOT 62P	2*31P

3. 96mm 焊接式 SOLT 母座

详细产品规格 - 请点击 cn.100y.com.tw

特性:

Housing: 30%Glass filled PBT UL 94V-0
 接触件材料: 磷青铜
 额定电流: 5 AMP.
 绝缘电阻: 5000M Ω min. At 500V DC.
 接触电阻: 20m Ω max. At DC 100mA.
 温度范围: -55 $^{\circ}$ C~+105 $^{\circ}$ C

100Y 编号	厂商编号	说明	Contact Centers	Mounting Ears Yes/No	插脚
3757	B02-LW-S10A2G	焊线 SOLT2*10Pin 镀金	GOLD	Yes	20
4151	B03-LW-S12A2G	焊线 SOLT2*12Pin 镀金	GOLD	Yes	2*12
4152	B04-LW-S15A2G	焊线 SOLT2*15Pin 镀金	GOLD	Yes	30
4153	B05-LW-S18A2G	焊线 SOLT2*18Pin 镀金	GOLD	Yes	36
4154	B06-LW-S22A2G	焊线 SOLT2*22Pin 镀金	GOLD	Yes	44
4155	B07-LW-S28A2G	焊线 SOLT2*28Pin 镀金	GOLD	Yes	56
4156	B09-LW-S36A2G	焊线 SOLT2*36Pin 镀金	GOLD	Yes	72


PCI 连接座



B47-4




B47 B57-5

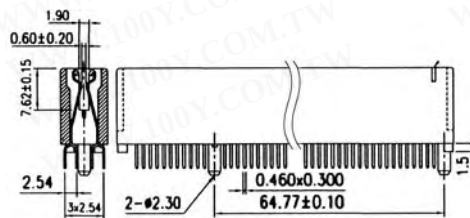



100Y 编号	厂商编号	说明	Mounting Ears Yes/No	插脚
2728	B47	P.C.I. 连接座 (插板式)	No	120
16176	B47-1	P.C.I. 连接座 120P(夹板式)	No	
40197	B47-4	P.C.I. 连接座 164P(插板式)	No	
27147	B57-5	P.C.I. 连接座 184P	No	184P

AGP 连接座

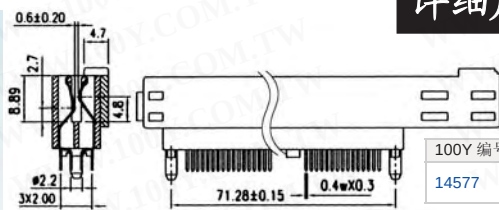详细产品规格 - 请点击 cn.100y.com.tw



100Y 编号	厂商编号	说明	Contact Centers	Mounting Ears Yes/No	插脚
14577	B58	插板式 SLOT AGP 124P	Tin	No	2*62Pins

IDC头/座, DIP头 + 夹具

2.54mm 180 简易含外壳IDC 公座





规格:
 额定电流: 3 A
 额定电压: 500 VAC(1 min)
 绝缘电阻: 1000MΩmin
 接触电阻: 30mΩmax
 温度范围: -40℃~+85℃
 承受力: 1KG MIN
 接触件材料: 黄铜
 0.64mm Square pin
 表面材料: 镀金

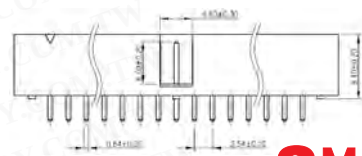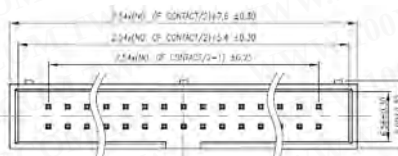

3M






规格:
 额定电流: 3 A 额定电压: 500 VAC(1 min)
 绝缘电阻: 1000MΩmin
 接触电阻: 30mΩmax
 温度范围: -40℃~+85℃
 承受力: 1KG MIN
 接触件材料: 黄铜
 0.64mm Square pin
 镀层: 镀金
 绝缘材质: P.B.T +30% G. F

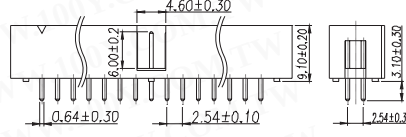

100Y 编号	厂商编号	制造厂商	说明	Contacts
4018	320-10		IDC 简易公座 180°	10P
4017	320-14		IDC 简易公座 180°	14P
2325	320-16		IDC 简易公座 180°	16P
4814	320-20		IDC 简易公座 180°	20P
4815	320-26		IDC 简易公座 180°	26P
2324	320-30		IDC 简易公座 180°	30P
4020	320-34		IDC 简易公座 180°	34P
4021	320-40		IDC 简易公座 180°	40P
2323	320-50		IDC 简易公座 180°	50P
4022	320-60		IDC 简易公座 180°	60P
4023	320-64		IDC 简易公座 180°	64P
5075	7610-6002SC/JL	3M	简易公座	10P
10714	7614-6002SC/JL	3M	简易公座	14P
5074	7620-6002SC/JL	3M	简易公 20P180°3M	20P/3M
10606	7626-6002SC/JL	3M	简易公座	26P
10715	7630-6002SC/JL	3M	简易公座	34P
10716	7640-6002SC/JL	3M	简易公座	40P
10717	7650-6002SC/JL	3M	简易公座	50P
10718	7660-6002SC/JL	3M	简易公座	60P
10713	DY-16VLP	3M	简易公座	16P

2.54mm 90 简易含外壳IDC 公座

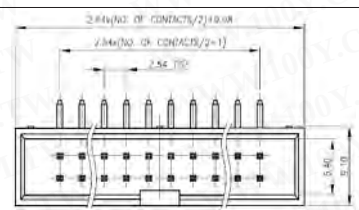

规格:
 额定电流: 1 A
 绝缘电阻: 1000MΩmin 500V DC for 1 min
 温度范围: -40℃~+105℃
 承受力: 1KG MIN
 接触件材料: 青铜或磷青铜
 绝缘材料: P.B.T +30% G. F
 镀层: 镀金

100Y 编号	厂商编号	说明	Contacts
4840	330-10	IDC 简易牛角座 90°	10P
4841	330-14	IDC 简易牛角座 90°	14P
4842	330-16	IDC 简易牛角座 90°	16P
4843	330-20	IDC 简易牛角座 90°	20P
4844	330-24	IDC 简易牛角座 90°	24P
3764	330-26	IDC 简易牛角座 90°	26P
3767	330-30	IDC 简易牛角座 90°	30P
3974	330-34	IDC 简易牛角座 90°	34P
3975	330-40	IDC 简易牛角座 90°	40P
3976	330-50	IDC 简易牛角座 90°	50P
25664	330-60	IDC 简易牛角座 90°	60P




服务专线: 台湾: 886-3-5753170
 传 真: 台湾: 886-3-5753172
 E-mail: 台湾: sale@100y.com.tw

深圳: 86-755-83298787
 深圳: 86-755-83640655
 深圳: 100y@163.com


上海: 86-21-34970699
 上海: 86-21-64605107
 上海: 100y-1@163.com



2. 54mm 180 牛角 IDC 公座

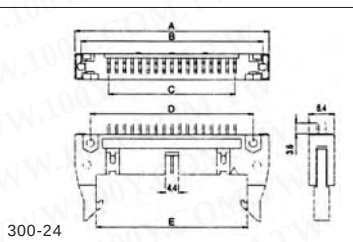详细产品规格 - 请点击 cn.100y.com.tw

300-24

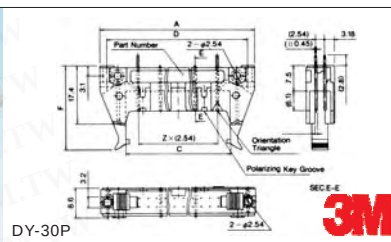


DY-30P



说明:
绝缘材料: P.B.T G. F
触片: 铜方针
镀层: 镀金
额定电流: 1 A
绝缘电阻: $5000M\Omega_{\min}$ at DC 500V
温度范围: $-55^{\circ}\text{C} \sim +105^{\circ}\text{C}$
接触电阻: $20m\Omega_{\max}$ at DC 100mA...

D07-64P-21mm




说明:
绝缘材料: P.B.T G. F
触片: 铜方针
镀层: 镀金
额定电流: 1 A
绝缘电阻: $5000M\Omega_{\min}$ at DC 500V
温度范围: $-55^{\circ}\text{C} \sim +105^{\circ}\text{C}$
接触电阻: $20m\Omega_{\max}$ at DC 100mA...


D07-64P-20mm

100Y 编号	厂商编号	制造厂商	说明	Contacts
3760	300-10		IDC 牛角公座 180°	10P
4168	300-14		IDC 牛角公座 180°	14P
3759	300-16		IDC 牛角公座 180°	16P
2326	300-20		IDC 牛角公座 180°	20P
17847	300-24		IDC 牛角公座 180°	24P
4170	300-30		IDC 牛角公座 180°	30P
4171	300-34		IDC 牛角公座 180°	34P
3758	300-40		IDC 牛角公座 180°	40P
3763	300-50		IDC 牛角公座 180°	50P
12265	300-60		IDC 牛角公座 180°	60P
4206	300-64		IDC 牛角公座 180°	64P
12704	3408-16		"3M" No.3408 牛角公座接头	16P
4169	D03-26P		IDC 牛角公座 180°	26P
27911	D07-10P-21mm		牛角长脚公座	10P 21mm
28680	D07-40-8mm		牛角长脚公座	40P 8mm
32194	D07-64P-20mm		牛角长脚公座	64P 20mm
39081	D07-64P-21mm		牛角长脚公座	64P 21mm
13691	DY-10P	3M	3M_ No.3662 牛角 IDC 公座	10P
13688	DY-20P	3M	3M_ No.3428 牛角 IDC 公座	20P
13692	DY-26P	3M	3M_ No.3429 牛角 IDC 公座	26P
13693	DY-30P	3M	3M_ No.3440 牛角 IDC 公座	30P
11981	DY-34P	3M	3M_ No.3431 牛角 IDC 公座	34P
12484	DY-50P	3M	3M_ No.3433 牛角 IDC 公座	50P
13687	DY-60P	3M	3M_ No.3372 牛角 IDC 公座	60P
10354	DY-64P	3M	3M_ No.3764 牛角 IDC 公座	64P
12702	FX-14P	3M	3M_ No.3314 牛角公座接头	14P
12703	FX-40P	3M	3M_ No.3432 牛角公座接头	40P

2. 54mm 90 牛角 IDC 公座

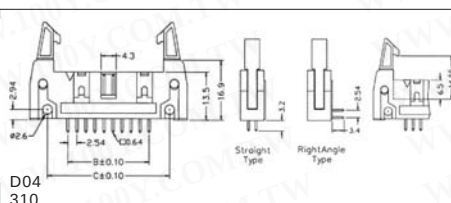详细产品规格 - 请点击 cn.100y.com.tw

D04 310



3'

说明:
绝缘材料: P.B.T G. F
触片: 铜方针
镀层: 镀金
镀锡
绝缘电阻: $5000M\Omega_{\min}$ at DC 500V
接触电阻: $20m\Omega_{\max}$ at DC 100mA
额定电流: 1 A
温度范围: $-55^{\circ}\text{C} \sim +105^{\circ}\text{C}$

100Y 编号	厂商编号	说明	Contacts
4182	310-14	IDC 牛角公座 90°	14P
2327	310-20	IDC 牛角公座 90°	20P
4174	310-24P	IDC 牛角公座 90°	24P
8787	310-26	IDC 牛角公座 90°	26P
4175	310-30	IDC 牛角公座 90°	30P
4176	310-34	IDC 牛角公座 90°	34P
3822	310-40	IDC 牛角公座 90°	40P
2921	310-50	IDC 牛角公座 90°	50P
23508	310-60	IDC 牛角公座 90°	60P
4177	310-64	IDC 牛角公座 90°	64P
16993	3764-5302	IDC 牛角公座 90°	64P
4172	D04-10P	IDC 牛角公座 90°	10P
4173	D04-16P	IDC 牛角公座 90°	16P







2. 54mm 压排 IDC 母插头

详细产品规格 - 请点击 cn.100y.com.tw

说明:
 额定电流: 3A
 额定电压: 500 VAC (1 Min)
 绝缘电阻: 1000Megohms Min
 接触电阻: 20 mΩ MAX
 温度范围: -40°C~+85°C
 接触材料: 磷青铜
 绝缘材料: P.B.T +30% G.F

D01-08P



IDCB0-260101B01



规格:
 电流: 1A
 电压: AC: 205V/DC: 300V
 温度范围: -55°C~+105°C
 绝缘抵抗:
 1000MΩ 以上

D01-14P

DY-64S+SR




100Y 编号	厂商编号	制造厂商	说明	Contacts
10085	280-64		2.54mm 压排 IDC 母插头	64P
26888	D01-08P		8P 2.54mm 压排 IDC 母插头(镀锡)	8P
30388	D01-14P		14P 2.54mm 压排 IDC 母插头(镀锡)	14P
4192	D01-16P		2.54mm 压排 IDC 母插头(镀锡)	16P
19742	D01-18P		2.54mm 压排 IDC 母插头(镀锡)	18P
7463	DY-10S+SR	3M	3M_IDC 压排母插头(镀全金)	10P
3799	DY-14S+SR	3M	3M_IDC 压排母插头(镀全金)	14P
7462	DY-16S+SR	3M	3M_IDC 压排母插头(镀全金)	16P
11323	DY-20S+SR	3M	3M_IDC 压排母插头(镀全金)	20P
7757	DY-26S+SR	3M	3M_IDC 压排母插头(镀全金)	26P
10711	DY-30S+SR	3M	3M_IDC 压排母插头(镀全金)	30P
11279	DY-34S+SR	3M	3M_IDC 压排母插头(镀全金)	34P
10712	DY-40S+SR	3M	3M_IDC 压排母插头(镀全金)	40P
7461	DY-50S+SR	3M	3M_IDC 压排母插头(镀全金)	50P
11419	DY-60S+SR	3M	3M_IDC 压排母插头(镀全金)	60P
11979	DY-64S+SR	3M	IDC 压排母插头(镀全金)	64P
2923	IDCB0-210101B01		2.54mm 压排 IDC 母插头(镀全金)	10P
4194	IDCB0-214101B01		2.54mm 压排 IDC 母插头(镀全金)	14P
2920	IDCB0-220101B01		2.54mm 压排 IDC 母插头(镀全金)	20P
4193	IDCB0-224101B01		2.54mm 压排 IDC 母插头(镀全金)	24P
4195	IDCB0-230101B01		2.54mm 镀金压排 IDC 母插头(镀全金)	30P
4189	IDCB0-234102B01		2.54mm 压排 IDC 母插头(镀半金)	34P
4190	IDCB0-240102B01-G		2.54mm 压排 IDC 母插头(镀半金)	40P
4196	IDCB0-250102B01		2.54mm 压排 IDC 母插头	50P
8008	IDCB0-260101B01		2.54mm 压排 IDC 母插头	60P
3259	IDCB0-2261TTB01		2.54mm 压排 IDC 母插头 (镀全金)	26P

2. 54mm IDC 压排公连接头

详细产品规格 - 请点击 cn.100y.com.tw


电压: AC 500V For 1 minute
 接触材料:
 青铜
 温度范围:
 -55°C~105°C

D08-24P



电压: AC 500V For 1 minute
 接触材料:
 青铜
 温度范围:
 -55°C~105°C

D09-10PE




100Y 编号	厂商编号	制造厂商	说明	Contacts
3762	D08-10P		IDC 压排牛角公头	10P
4185	D08-14P		IDC 压排牛角公头	14P
4191	D08-16P		IDC 压排牛角公头	16P
3803	D08-20P		IDC 压排牛角公头	20P
17848	D08-24P		IDC 压排牛角公头	24P
4184	D08-26P		IDC 压排牛角公头	26P
4183	D08-34P		IDC 压排牛角公头	34P
2363	D08-40P		IDC 压排牛角公头	40P
4186	D08-50P		IDC 压排牛角公头	50P
3812	D08-60P		IDC 压排牛角公头	60P
4187	D08-64P		IDC 压排牛角公头	64P
30387	D09-10PE		简易压排公头 10P(有定位孔)	10P
30386	D09-14PE		简易压排公头 14P(有定位孔)	14P
30385	D09-16PE		简易压排公头 16P(有定位孔)	16P
30384	D09-20PE		简易压排公头 20P(有定位孔)	20P
30383	D09-26PE		简易压排公头 26P(有定位孔)	26P
30382	D09-30PE		简易压排公头 30P(有定位孔)	30P
30381	D09-34PE		简易压排公头 34P(有定位孔)	34P
30380	D09-40PE		简易压排公头 40P(有定位孔)	40P





额定电流: 1A
绝缘电阻: 1000M Ω Min at 500V DC
接触电阻:
10 M Ω Max
绝缘电压值:
500V AC for one minute
温度范围:
-40 $^{\circ}$ C~+105 $^{\circ}$ C

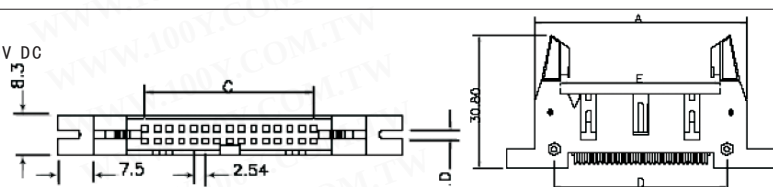

绝缘材料: Glass Filled Polyester (PBT)
绝缘电阻: $>1 \times 10^9$ Ohms @ 500 Vdc
接口栅格: 100" x .100"
接口样式: 长方形插座
温度范围: -55 $^{\circ}$ C~+105 $^{\circ}$ C
额定电压: 1000 Vrms at Sea Level
额定电流: 1 A
绝缘材料颜色: 灰色
接触材料: 铜合金

Conductor Accommodation 26 & 28 AWG Solid or Stranded
Contact Under plating 100 μ " [2.54 μ m] Nickel
Contact Wiping Area Plating 30 μ " [0.76 μ m] Gold
Insulation Flammability Rating UL 94V-0
Mounting Option Mounting Flanges - Slotted
Polarization Military & Center Bump
Termination Method Insulation Displacement
Termination Style Multiple Wires




100Y 编号	厂商编号	制造厂商	说明	Contacts
16824	4234-0000LCSC/-0300	3M	压排公头 (附固定座)	34P
20298	4610-6050	3M	3M_ 压排线公头(附固定座)	10P
13969	D09-10P		IDC 压排牛角公头	64P
28759	D09-14P		简易压排公头 34P(附耳朵)	14P
28760	D09-16P		简易压排公头 34P(附耳朵)	16P
28761	D09-20P		简易压排公头 34P(附耳朵)	20P
28762	D09-26P		简易压排公头 34P(附耳朵)	26P
28763	D09-30P		简易压排公头 30P	30P
12062	D09-34P		简易压排公头 34P	34P
28764	D09-40P		简易压排公头 40P	40P
28765	D09-50P		简易压排公头 50P	50P
30379	D09-50PE		简易压排公头 50P(有定位孔)	50P
28766	D09-60P		简易压排公头 60P	60P
30378	D09-60PE		简易压排公头 60P(有定位孔)	60P
28767	D09-64P		简易压排公头 64P	64P
30377	D09-64PE		简易压排公头 64P(有定位孔)	64P
16595	FX-34P	3M	IDC 压排牛角公头	34P

2. 00mm 压排 IDC 母插头

详细产品规格 - 请点击 cn.100y.com.tw






额定电流: 1A
绝缘电阻: 5000M Ω Min at 500V DC
接触电阻: 20 M Ω Max at DC 100mA
温度范围: -55 $^{\circ}$ C~+105 $^{\circ}$ C

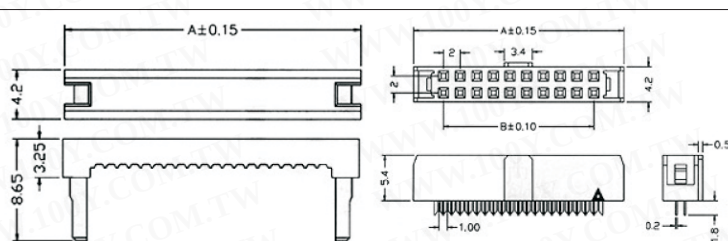

100Y 编号	厂商编号	说明	Contacts
12324	285-20-HIDS20SB1A1	牛角母座	20P
4858	285-34-HIDS34SB1A1	牛角母座	34P
4859	285-40-HIDS40SB1A1	牛角母座	40P
12373	285-44-HIDS44SB1A1	牛角母座	44P
4861	285-50-HIDS50SB1A1	牛角母座	50P
39737	D47-12P	牛角母座	12P
36915	D47-14P	牛角母座	
26544	D47-24P	牛角母座	24P
4857	D47-26P	牛角母座	26P
4862	D47-68P	牛角母座	68P

2. 00mm 180 简易含外壳IDC 公座

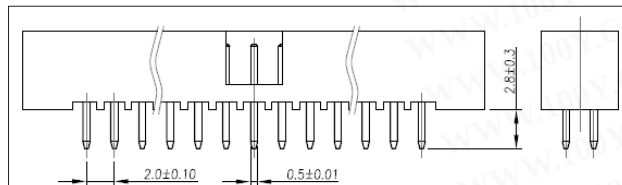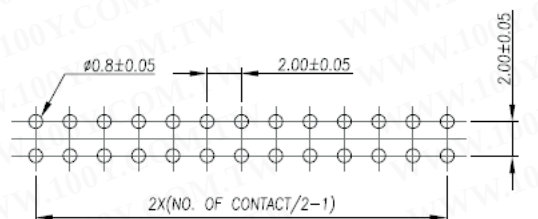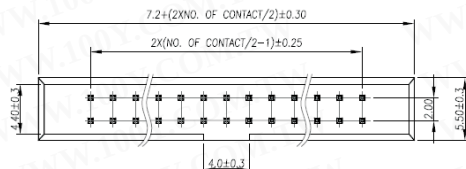

额定电流: 1A
绝缘电阻: 10000 MEGOHMS Min
温度范围: -40 $^{\circ}$ C~+85 $^{\circ}$ C
接触件材料: 黄铜0.5mm 平方


额定电压: 500 VAC (1 Min)
接触电阻: 30 MEGOHMS Min
绝缘材料: P.B.T & 30% G.F
镀层: 金

100Y 编号	厂商编号	说明	Contacts
37776	D62-40P	牛角公座	40P
16601	D62-44P	牛角公座	44P





2. 54mm 压接排线的DIP IDC头

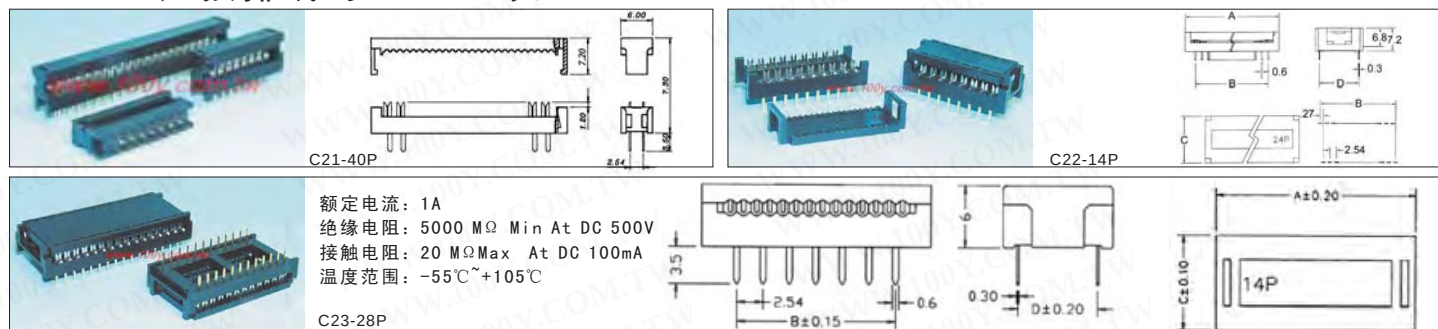

Material:
Housing: 30% Glass filled PBT UL94V-0
Plating: Selective gold plated: gold plated on mating area and nickel plated on wire cutting area
Gold plated: 2u" over 50u" nickel
Cable: 1.27mm (0.050") pitch flat cable

Contacts: Brass or Phosphor Bronze
Tin plated: 100u" over 50u" nickel

Features:
Fast connection of flat cable to PC board.
Recommended 28AWG 1.27mm(0.05") flat cable.
Plug directly into 2.54mmX2.54mm PC board.

100Y 编号	厂商编号	说明	Contacts	宽度(inch)
5787	C21-10P	压排 IC 座	10P	0.1*0.1
8741	C21-14P	压排 IC 座	14P	0.1*0.1
8742	C21-16P	压排 IC 座	16P	0.1*0.1
8743	C21-20P	压排 IC 座	20P	0.1*0.1
8745	C21-24P	压排 IC 座	24P	0.1*0.1
8744	C21-26P	压排 IC 座	26P	0.1*0.1
8746	C21-30P	压排 IC 座	30P	0.1*0.1
5972	C21-34P	压排 IC 座	34P	0.1*0.1
8747	C21-40P	压排 IC 座	40P	0.1*0.1
3813	C22-10P	压排 IC 座	10P	0.1*0.3
7823	C22-14P	压排 IC 座	14P	0.1*0.3
4198	C22-16P	压排 IC 座	16P	0.1*0.3
4205	C22-18P	压排 IC 座	18P	0.1*0.3
4201	C22-20P	压排 IC 座	20P	0.1*0.3
4200	C23-24P	压排 IC 座	24P	0.1*0.6
4204	C23-28P	压排 IC 座	28P	0.1*0.6
4203	C23-32P	压排 IC 座	32P	0.1*0.6
4202	C23-40P	压排 IC 座	40P	0.1*0.6

压接排线的工具




详细产品规格 - 请点击 cn.100y.com.tw

HT-214: FOR CRIMPING IDC-TYPE OF CONNECTORS ON TO RIBBON CABLE.
CRIMPING FROM HEIGHT 6mm DISTANCE TO 27.5mm
(MAX. 55mm WIDTH)

100Y 编号	厂商编号	说明
7578	HT-214	压接排线钳


D型头/座+外壳+工具

D-Type 插板式 90

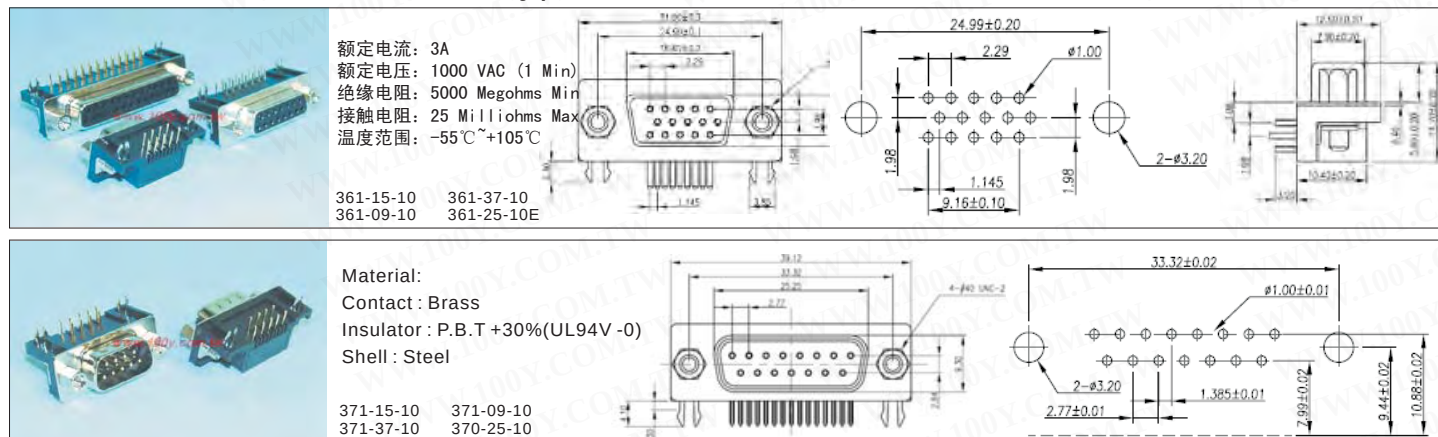

100Y 编号	厂商编号	说明
3363	361-09-10	D 型插板式/母座 9P
3364	361-15-10	D 型插板式/母座 15P
1934	361-25-10E	D 型插板式/母座 25P
1987	361-37-10	D 型插板式/母座 37P
1936	370-25-10	D 型插板式/公座 25P
3365	371-09-10	D 型插板式 90°公座 9P
3366	371-15-10	D 型插板式/公座 15P
3323	371-37-10	D 型插板式 37P 公座



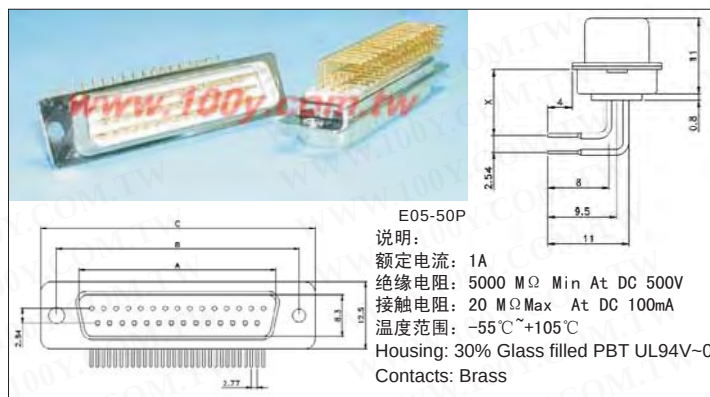

说明:
额定电流: 5A
电压: 300V DC
额定电压: 500 V(r.m.s) AC for 1 min
绝缘电阻: 1000M ohm at 500V DC
温度范围: -55°C~+105°C



100Y 编号	厂商编号	说明
13354	540-78	HDRS78GB1D2 90°插板式 4R78P(母)
17141	E05-50P	D-SUB 插板 50 公 90°
20598	E06-50P	D-SUB 插板 50 母 90°

D-Type 插板式 180

详细产品规格 - 请点击 cn.100y.com.tw



操作电压: 250 VAC max
额定电流: 2.5 Amps
接触电阻: 20mΩ max
绝缘电阻: 3000M Ω min, at DC 500V
额定电压: AC 1000V for 1 Miu
温度范围: -55°C~+105°C
Material
Insulator: PBT& Glass Fill reinforced UL94V-0
Contact: Brass (Male);Phosphor Bronze (Female)
Shell: Steel

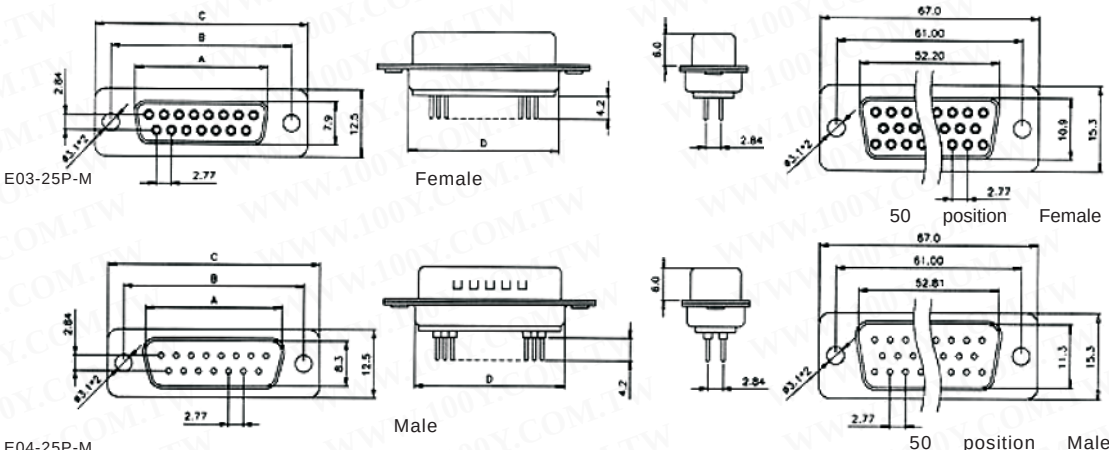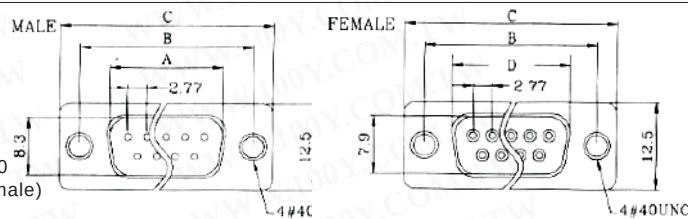

说明:
操作电压: 250 VAC max
额定电流: 2.5 Amps
接触电阻: 20mΩ max
绝缘电阻: 3000M Ω min, at DC 500V
额定电压: AC 1000V for 1 Miu
温度范围: -55°C~+105°C
Contact Plating
Contact Area: Gold flash
Solder tail area: 100 μ tin on solder tail, base nickel 40
Material
Insulator: PBT& Glass Fill reinforced UL94V-0
Contact: Brass (Male);Phosphor Bronze (Female)
Shell: Steel


100Y 编号	厂商编号	说明
5785	460-50-02	D 型插板式 50P 母座
3425	461-09-02	D 型插板式 9P 母座 180°
3423	470-09-02	D 型插板式 9P 公座 180°
3428	470-25-02	D 型插板式 25P 公座 180°
13708	E03-15P	D 型插板式 15P 公座 180°
13221	E03-25P-M	D 型 25 公 插板 180° 车床 PIN 10.8
23716	E04-15P	D 型插板式 15P 母座 180°
3424	E04-25P	D 型插板式 25P 母座 180°
13161	E04-25P-M	D 型 25 母 插板 180°
28699	E04-37P	D 型插板式 37P 母座 180°
13224	E09-15P	D 型 3 排插板/15 公

假如您需要适合特殊用途的产品或更详细的技术资料,
我们的业务专员将会透过电话、传真、E-mail 帮助您





D-Type 针的压接工具

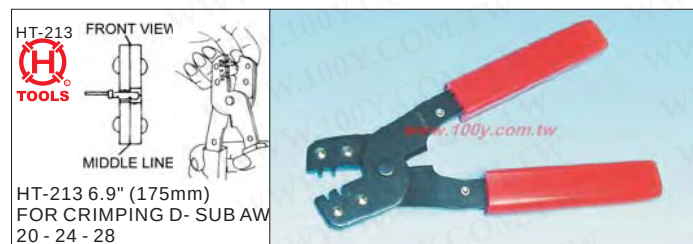

100Y 编号	厂商编号	制造厂商	压接线径	Description
8559	HT-213	HANLONG	AWG 20-28	D-SUB 端子钳
15054	HT-2250-DIE	HANLONG	RG58, 59, 6	HT-2250 DIE
15055	HT-2253-DIE	HANLONG	RG-6, BELDEN 8281	HT-2253-DIE
9840	HT-225D	HANLONG	AWG 18-30	压接 D-SUB 的针工具
9838	HT-236U	HANLONG	AWG 14-22	压接 D-SUB 的针工具
16560	HT-336U-DIE	HANLONG	AWG14-22	HT-336U DIE

D-Type 防尘套



100Y 编号	厂商编号	说明
27925	E47-09P	D 型 接头 9 公 防尘套
27926	E47-15P	D 型 接头 15 公 防尘套
27927	E47-15S	D 型 接头 15 母 防尘套
27928	E47-9F	D 型 接头 9 母 防尘套

D-Type 塑胶外壳



D-Type 塑料外壳 25P 转换器外壳 灰色
规格 25P to 25P 转换胶壳外壳

100Y 编号	厂商编号	说明
3310	E34-15/15P	15/15P 转换器塑料外壳
3311	E34-25/25P	25/25P 转换器塑料外壳
3309	E34-9/9P	9/9P 转换器塑料外壳



D型9P 胶壳外壳 (快速壳)
产品规格 9P 胶壳外壳
外型: D型灰色外壳 (快速壳)
颜色 灰色

100Y 编号	厂商编号	说明
15860	E14-09P-1	D 型灰色塑料外壳 9P (快速壳)



D型 37P 胶壳外壳 (附长螺丝)
产品规格 37P 胶壳外壳
颜色 灰色

100Y 编号	厂商编号	说明
13353	640-50	50P D 型塑料灰色外壳
3308	670-37	D 型塑料灰色外壳 37P
2344	E14-09P	D 型塑料灰色外壳 9P
3307	E14-15P	D 型塑料灰色外壳 15P
1932	E14-25P	D 型塑料灰色外壳 25P

详细产品规格 - 请点击 cn.100y.com.tw

D-Type 铁外谷



E16-09P D型9P 铁壳外壳 (传统型锁螺丝)
产品规格 9P 铁壳外壳
外型: 传统型锁螺丝


100Y 编号	厂商编号	说明
2349	E16-09P	9P D 型铁外壳 OD:7mm
3418	E16-15P	15P D 型铁外壳
2368	E16-25P	D 型铁外壳 25P
3420	E16-37P	37P D 型铁外壳 OD:14mm
17887	E16-50P	D 型铁外壳 50P

HD-Type 高密度插板式



说明:
额定电流: 3A
额定电压: 1000VAC (1 Mi u)
绝缘电阻: 5000 Megohms Min
接触电阻: 25 Milliohms Max
温度范围: -55°C ~ +105°C

Material
Insulator: PBT +30% (UL94V-0)
Contact: Brass
Shell: Steel

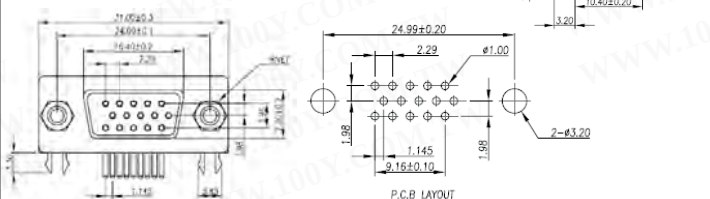


100Y 编号	厂商编号	说明
1978	541-15	高密度三排插板式母座 90°


详细产品规格 - 请点击 cn.100y.com.tw





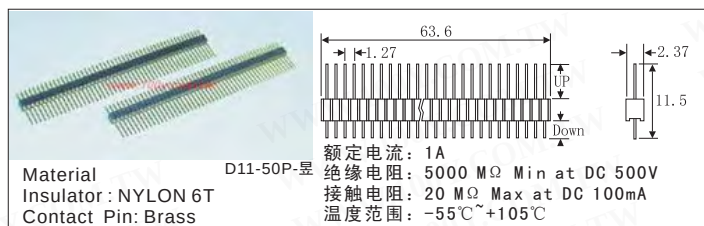


100Y 编号	厂商编号	说明	角	Up(mm)	插脚	Down(mm)	全长
6527	D11-50P-50P	1.27mm 单排排针	180°	6	1*50	3	11.5
9239	D65-40P/A	1.27mm 单排排针	180°	2.8	1*40	3.15	8.1
25837	D65-40P/C	1.27mm Male Headers (Gold) -Single Row	90°	2.8	1*40	3.15	8.1

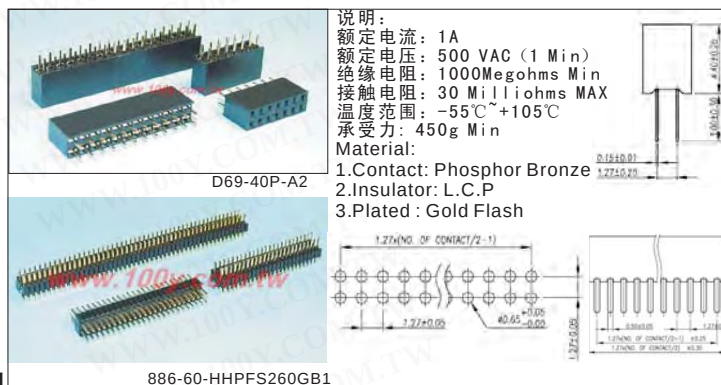

100Y 编号	厂商编号	说明	Angle	Pins 2*?	全长(mm)
13285	886-60-HHPFS260GB1	Pitch: 1.27 镀金排针母座	180°	2*30	38mm
38123	D69-40P-A2	Pitch: 1.27 镀金排针母座	180°	2*20	26mm


详细产品规格 - 请点击 cn.100y.com.tw

1. 27mm 双排排针

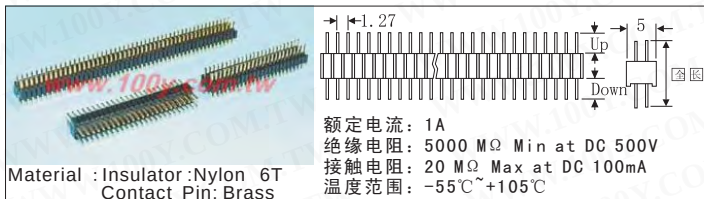


100Y 编号	厂商编号	说明	Angle	Up(mm)	Pins 2*?	Down(mm)	全长(mm)
13355	866-100	1.27mm 双排排针	180°	2.7	2*50	2.7	7.9
13286	866-50	1.27mm 双排排针	180°	3	2*25	3	8.55
28164	D76-20P	1.27mm 双排排针	180°		2*10		1.27mm
28165	D76-40P-2	1.27*1.27mm 双排排针	180°	3	2*20	3	1.27mm
36123	D76-50P	1.27mm 双排排针	180°		2*25		

1. 27mm 单排排针母座

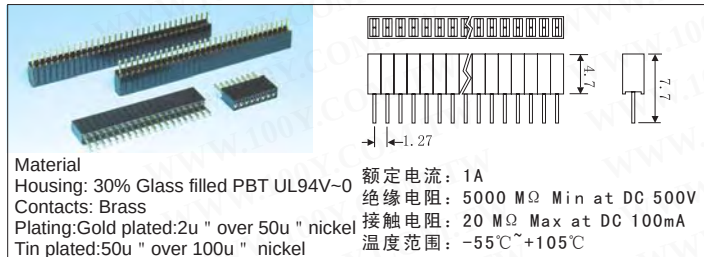



100Y 编号	厂商编号	说明	Angle	Pins 1*?	全长(mm)
10485	885-08-HHPFS108GB1	Pitch: 1.27 镀金排针母座	180°	1*8	7.7
10484	885-20-HHPFS120GB1	Pitch: 1.27 镀金排针母座	180°	1*20	7.7
10486	885-32-HHPFS132GB1	Pitch: 1.27 镀金排针母座	180°	1*32	7.7
10487	885-40-HHPFS140GB1	Pitch: 1.27 镀金排针母座	180°	1*40	7.7

1. 27mm 双排排针母座

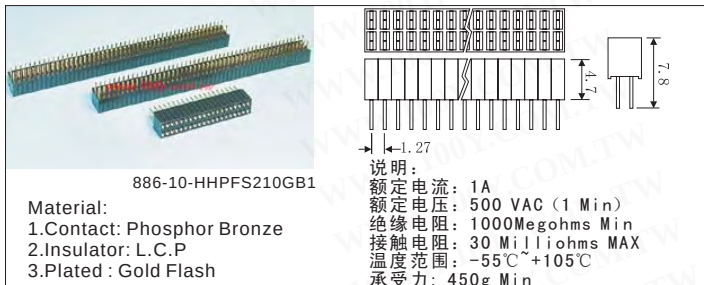



100Y 编号	厂商编号	说明	Angle	Pins 2*?	全长(mm)
29440	886-10-HHPFS210GB1	Pitch: 1.27 镀金排针母座	180°	2*5	7.8mm
10492	886-100-HHPFS2100GB1	Pitch: 1.27 镀金排针母座	180°	2*50	7.8mm
10488	886-16-HHPFS216GB1	Pitch: 1.27 镀金排针母座	180°	2*8	7.8mm
32236	886-20-H06-HHPFS220GB106H	Pitch: 1.27 镀金排针母座	180°	2*10	13mm
10489	886-20-HHPFS220GB1	Pitch: 1.27 镀金排针母座	180°	2*10	7.8mm
22628	886-40-01-HHPFS240GB101	Pitch: 1.27 镀金排针母座 / 黑色 高度 8.5mm	180°	2*20	7.8mm
32235	886-40-H06-HHPFS240GB106H	Pitch: 1.27 镀金排针母座	180°	2*20	25.5mm
10491	886-40-HHPFS240GB1	Pitch: 1.27 镀金排针母座 / 黑色 高度 4.6mm	180°	2*20	7.8mm
10490	886-64-HHPFS264GB1	Pitch: 1.27 镀金排针母座	180°	2*32	7.8mm

2. 0mm 单排排针

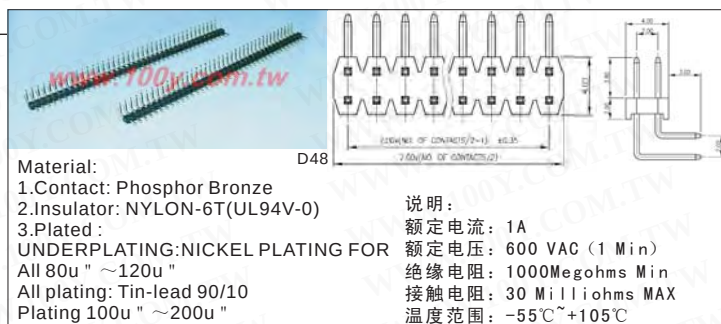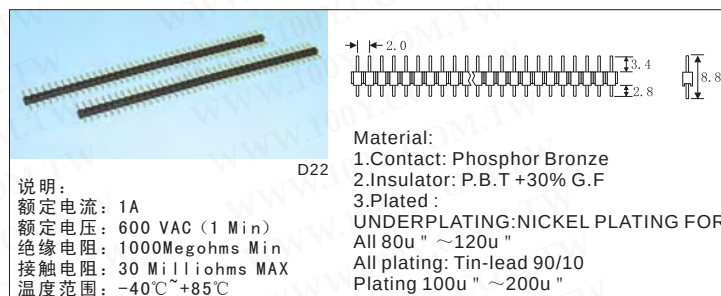

100Y 编号	厂商编号	说明	Pins	Angle	Up(mm)	Down(mm)	全长(mm)
3824	D22-40P	2.0mm 单排排针	1*40	180°	3.4	2.8	8.8
31972	D48-20P	2.0mm 单排排针	1*20	90°			
17114	D48-40P	2.0mm 单排排针	1*40	90°	5mm	4mm	10mm


2. 0mm 双排排针

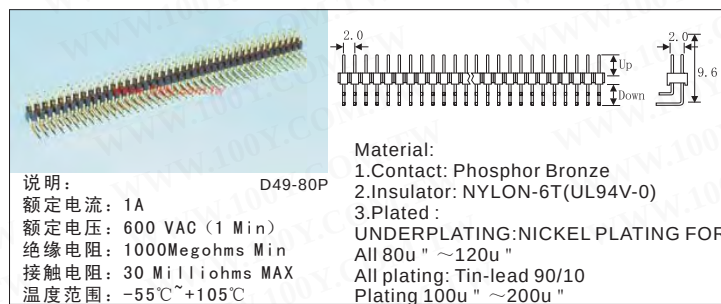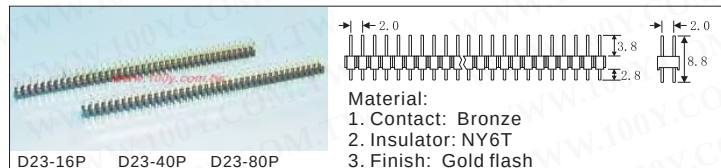

100Y 编号	厂商编号	说明	Pins	Angle	Up(mm)	Down(mm)	全长(mm)
28083	D23-16P	2.0mm 双排排针	2*8	180°	3.8	2.8	8.8
28082	D23-40P	2.0mm 双排排针	180°	3.8	2*20	2.8	8.8
3768	D23-80P	2.0mm 双排排针	2*40	180°	3.8	2.8	8.8
12431	D49-80P	2.0mm 双排排针	2*40	90°	3.6mm	3.8mm	9.6mm






2005系列2.0mm杜邦超薄连接头和端子

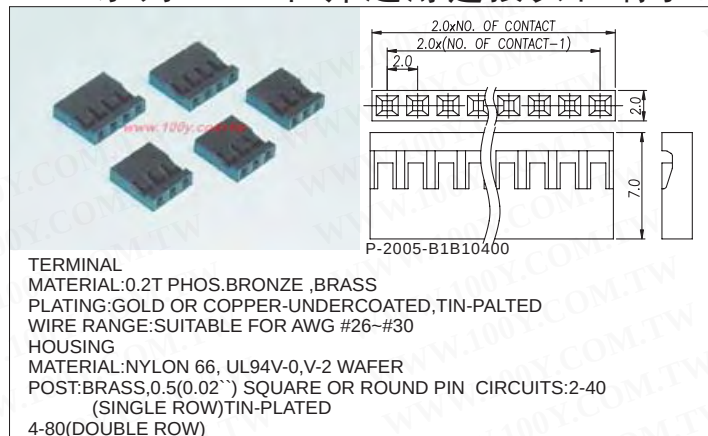

100Y 编号	厂商编号	说明	Pins	Pitch
14027	P-2005-B1B10200	超薄连接器	2P	2.0mm
14028	P-2005-B1B10300	ULTRA-SMALL DISCONNECTABLE CONNECTS	3P	2.0mm
14029	P-2005-B1B10400	ULTRA-SMALL DISCONNECTABLE CONNECTS	4P	2.0mm
14030	T-2005-P30100	CONTACT 2005T 漂金 PHOSPHOR BRONZE C5191R-H	8000PCS/R	2.0mm 2.0mm




2.0mm 单排排针母座

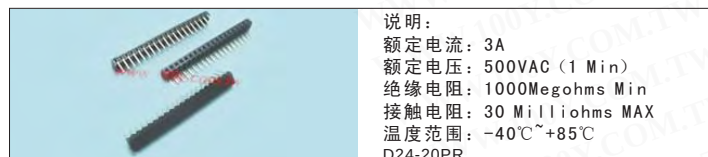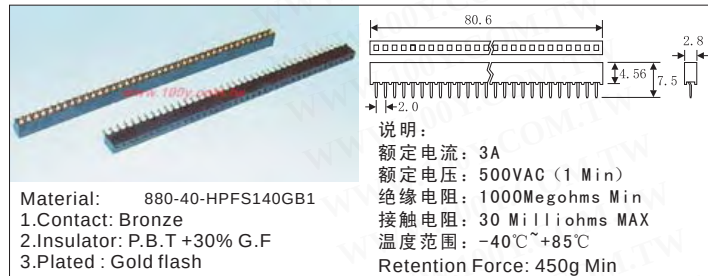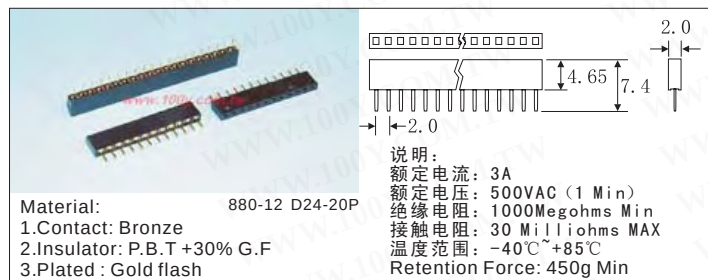

100Y 编号	厂商编号	说明	角度	插脚	黑体长(mm)
10961	880-12	2.0mm 单排排针母座	180°	1*12	4.65
10493	880-40-HPFS140GB1	2.0mm 单排排针母座	180°	1*40	4.3
8638	D24-20P	2.0mm 单排排针母座	180°	1*20	4.65
31973	D24-20PR	2.0mm 单排排针母座 90°	90°	1*20	4


详细产品规格 - 请点击 cn.100y.com.tw

2.0mm 双排排针母座

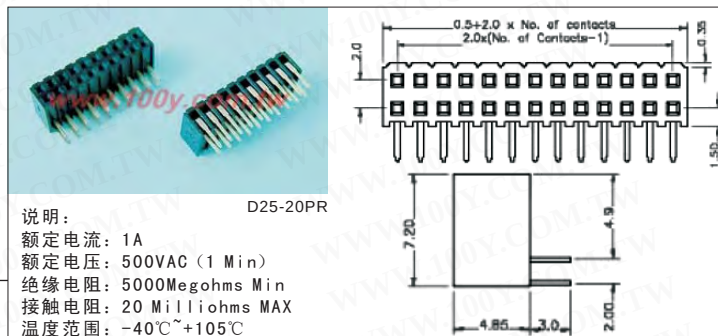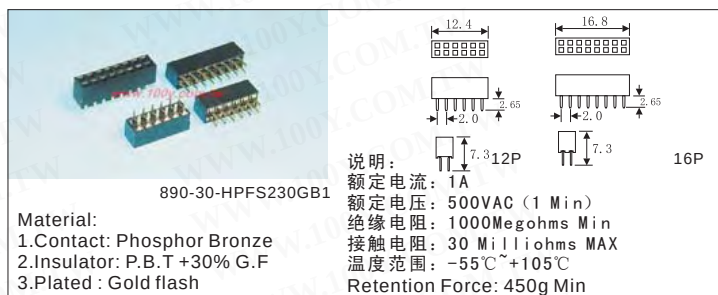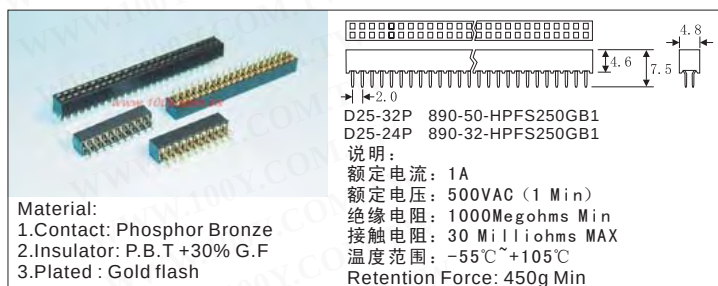

100Y 编号	厂商编号	说明	Angle	Pins 2*?	黑体长(mm)
32948	890-08-HPFS208GB1	2.0mm 双排排针母座	180°	2*4	4.8
8748	890-12-HPFS212GB1	2.0mm 双排排针母座	180°	2*6	4.8
8749	890-16-HPFS216GB1	2.0mm 双排排针母座	180°	2*8	4.8
17959	890-30-HPFS230GB1	2.0mm 双排排针母座	180°	2*15	4.8
29355	890-32-HPFS250GB1	2.0mm 双排排针母座	180°	2*16	4.8
8751	890-34-HPFS234GB1	2.0mm 双排排针母座	180°	2*17	4.8
8740	890-40-HPFS240GB1	2.0mm 双排排针母座	180°	2*20	4.8
8752	890-50-HPFS250GB1	2.0mm 双排排针母座	180°	2*25	4.8
8750	D25-20P	2.0mm 双排排针母座	180°	2*10	4.8
27148	D25-20PR	2.0mm 双排排针母座	90°	2*20	7
32652	D25-24P	2.0mm 双排排针母座	180°	2*12	4.8
32653	D25-32P	2.0mm 双排排针母座	180°	2*16	4.8
32654	D25-46P	2.0mm 双排排针母座	180°	2*23	4.8

2.54mm & 2.0mm排针短路Pin

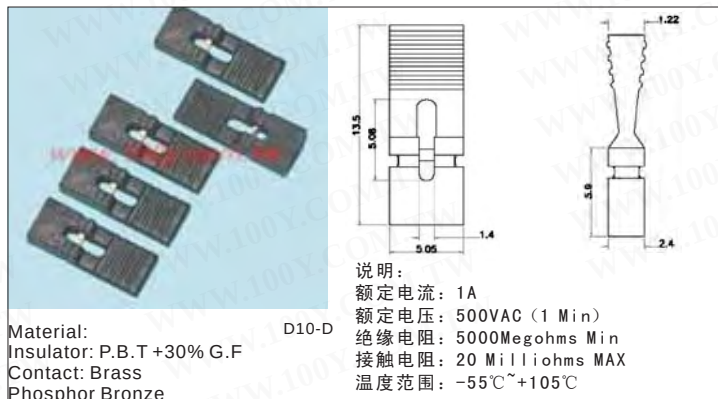


100Y 编号	厂商编号	说明	全长(mm)	Pitch
23277	D10-D	2.54mm Jumper	Top Open.Black /H: 13mm	2.54mm



D10-B2/4.5mm

Material:
Insulator: P.B.T +30% G.F
Contact: Phosphor Bronze




说明:
额定电流: 1A
额定电压: 500VAC (1 Min)
绝缘电阻: 5000Megohms Min
接触电阻: 20 Milliohms MAX
温度范围: -55℃~+105℃



D26-2.0mm

Material:
Insulator: P.B.T +30% G.F
Contact: Phosphor Bronze




说明:
额定电流: 1A
额定电压: 250VAC (1 Min)
绝缘电阻: 5000Megohms Min
接触电阻: 20 Milliohms MAX
温度范围: -55℃~+105℃



46-02

Material:
Insulator: P.B.T +30% G.F
Contact: Phosphor Bronze



说明:
额定电流: 1A
额定电压: 250VAC (1 Min)
绝缘电阻: 5000Megohms Min
接触电阻: 20 Milliohms MAX
温度范围: -55℃~+105℃





D10-B3



D10-B2-1

100Y 编号	厂商编号	说明	全长(mm)	Pitch
17981	46-02	短路 Pin Close Type	6mm	2.54mm
28178	D10-B2-1	Open-短路 Pin	Top Open, 黄色 / H: 6mm	2.54mm
3516	D10-B2/4.5mm	Open-短路 Pin	Top Open, 黑色 / H: 4.5mm	2.54mm
2720	D10-B2/6mm	Open-短路 Pin	Top Open, 黑色 / H: 6mm	2.54mm
2328	D10-B2/8mm	Open-短路 Pin	Top Open, 黑色 / H: 8mm	2.54mm
32106	D10-B3	Open-短路 Pin 三连体	Top Open, 黑色 / H: 6mm	2.0mm
23277	D10-D	2.54mm Jumper	Top Open, Black / H: 13mm	2.54mm
4135	D26-2.0mm	Open-短路 Pin	Top Open, 黑色 / 2.0mm	2.0mm

"3001" Series (单排) 无极性黑色2.54mm杜邦超薄连接头和端子




F13

TERMINAL:
MATERIAL: 0.2T PHOS.BRONZE, BRASS
PLATING: GOLD OR COPPER, UNDERCOATED, TIN PLATED
WIRE RANGE: SUITABLE FOR AWG #22~#30
HOUSING:
MATERIAL: PBT OR NYLON UL 94V-0, V-2
WAFER:
POST: BRASS 0.64(.025") SQUARE PIN, TIN-PLATED
CIRCUITS: 2-60(SINGLE ROW)
4-120(DOUBLE ROW)




F15



100Y 编号	厂商编号	说明	Pins	Pitch	Parking
4603	F13-01P	黑色无极性连接头	1P	2.54mm	
3691	F13-02P	黑色无极性连接头	2P	2.54mm	
3690	F13-03P	黑色无极性连接头	3P	2.54mm	
3689	F13-04P	黑色无极性连接头	4P	2.54mm	
4583	F13-05P	黑色无极性连接头	5P	2.54mm	
4584	F13-06P	黑色无极性连接头	6P	2.54mm	
4585	F13-08P	黑色无极性连接头	8P	2.54mm	
4586	F13-10P	黑色无极性连接头	10P	2.54mm	
4587	F13-12P	黑色无极性连接头	12P	2.54mm	
19768	F13-14P	黑色无极性连接头	14P	2.54mm	
23717	F13-20P	黑色无极性连接头	20P	2.54mm	
13706	F15	杜邦超薄 端子漂金	10000/R	2.54mm	10,000 PCS(reel)

详细产品规格 - 请点击 cn.100y.com.tw

"3001" Series (双排) 无极性黑色2.54mm杜邦超薄连接头

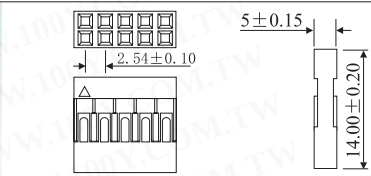

F14


TERMINAL:
MATERIAL: 0.2T PHOS.BRONZE, BRASS
PLATING: GOLD OR COPPER, UNDERCOATED, TIN PLATED
WIRE RANGE: SUITABLE FOR AWG #22~#30
HOUSING:
MATERIAL: PBT OR NYLON UL 94V-0, V-2
WAFER:
POST: BRASS 0.64(.025") SQUARE PIN, TIN-PLATED
CIRCUITS: 2-60(SINGLE ROW)
4-120(DOUBLE ROW)

100Y 编号	厂商编号	说明	Pins
4653	F14-10P	无极性接头(双排母座)	10P
4654	F14-12P	无极性接头(双排母座)	12P
4655	F14-14P	无极性接头(双排母座)	14P
4656	F14-16P	无极性接头(双排母座)	16P
4657	F14-18P	无极性接头(双排母座)	18P
4658	F14-20P	无极性接头(双排母座)	20P
15619	F14-30P	无极性接头(双排母座)	30P
16033	F14-34P	无极性接头(双排母座)	34P
15934	F14-40P	无极性接头(双排母座)	40P

2.54mm 单排排针



D12-40P

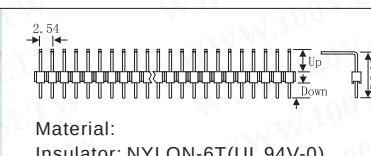



Material:
Insulator: NYLON-6T(UL 94V-0)
Contact: Phosphor Bronze
Plated:
Underplating: nickel plating for
All 80u" ~120u"
All plating: tin-lead 90/10
Plating 100u" ~200u"

说明:
额定电流: 3A
额定电压: 800VAC (1 Min)
绝缘电阻: 1000Megohms Min
接触电阻: 30 Milliohms MAX
温度范围: -40℃~+85℃

100Y 编号	厂商编号	说明	Angle	Pins 1 *?	Up(mm)	Down(mm)	全长(mm)
4737	D12-40P	2.54mm 单排排针	90°	1*40	3.0	3.3	9.54



详细产品规格 - 请点击 cn.100y.com.tw





说明:
额定电流: 1A
绝缘电阻: 5000MΩ Min at DC 500V
接触电阻: 20 MΩ MAX at DC 100mA
温度范围: -55℃~+105℃

Material: D15-40A1S
Insulator: 30% Glass fiber PBT
Contact Pin: Brass


说明:
额定电流: 1A
绝缘电阻: 5000MΩ Min at DC 500V
接触电阻: 20 MΩ MAX at DC 100mA
温度范围: -55℃~+105℃

Material: PHS140GB1153
Insulator: NYLON 6T
Contact Pin: Brass


说明:
额定电流: 3A
额定电压: 800VAC (1 Min)
绝缘电阻: 1000Megohms Min
接触电阻: 30 Milliohms MAX
温度范围: -40℃~+85℃

Material: D15-40P/14.2MM
Insulator: P.B.T
Contact: Brass 0.64mm Square Pin Plated: Gold flash

说明:
额定电流: 3A
额定电压: 800VAC (1 Min)
绝缘电阻: 1000Megohms Min
接触电阻: 30 Milliohms MAX
温度范围: -40℃~+85℃

Material: 80-40
Insulator: P.B.T
Contact: Brass 0.64mm Square Pin Plated: Gold flash



说明:
额定电流: 3 Amps
绝缘电阻: 5000 Megohms Min
接触电阻: 30 Milliohms MAX
介质耐电压: AC 500V
温度范围: -40~+105℃
接触件材料: 黄铜
绝缘材料: 聚酯, UL 94V-0

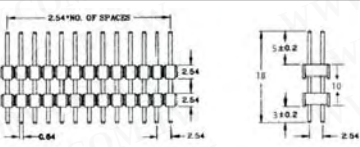Standard: PBT
Finish: Gold plated
Soldering Ability: 95% in 245℃+5℃


Material: PPHS1-88-40-122

100Y 编号	厂商编号	说明	Angle	Pins 1 *?	Up(mm)	Down(mm)	全长(mm)
7777	80-40	2.54mm 单排排针	180°	40*1	6	3.3	11.6mm
4737	D12-40P	2.54mm 单排排针	90°	1*40	3.0	3.3	9.54
1940	D15-40A1S	2.54mm 单排排针	180°	1*40	7.1	7.1	14.2
7778	D15-40P/14.2MM	2.54mm 单排排针	180°	1*40	8.6	3.3	14.2
3769	D15-40P/18MM	2.54mm 单排排针	180°	1*40	12.8	3.3	18.0
4686	D15-40P/18MM/等长	2.54mm 单排排针	180°	1*40	7.8	7.8	18
12323	PHS140GB1153	2.54mm 单排排针	180°	1*40	11.5	11.5	25
23894	PPHS1-88-40-122	2.54mm 单排排针	180°	1*40	5	3	18

2.54mm 双排排针


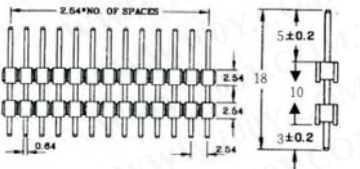



PPHS2-99-80-122


说明:
额定电流: 1A
绝缘电阻: 5000MΩ Min at DC 500V
接触电阻: 20 MΩ MAX at DC 100mA
温度范围: -55℃~+105℃

Material: D15-80P/18MM
Insulator: 30% Glass fiber PBT
Contact Pin: Brass
plated: gold plated
Tin plated


说明:
额定电流: 1A
绝缘电阻: 5000MΩ Min at DC 500V
接触电阻: 20 MΩ MAX at DC 100mA
温度范围: -55℃~+105℃

Material: D15-80P/18MM/等长
Insulator: 30% Glass fiber PBT
Contact Pin: Brass
plated: gold plated
Tin plated

说明:
额定电流: 1A
绝缘电阻: 5000MΩ Min at DC 500V
接触电阻: 20 MΩ MAX at DC 100mA
温度范围: -55℃~+105℃

Material: D13-06P D13-12P D13-08P D13-80P
Insulator: 30% Glass fiber PBT
Contact Pin: Brass


说明:
额定电流: 1A
绝缘电阻: 5000MΩ Min at DC 500V
接触电阻: 20 MΩ MAX at DC 100mA
温度范围: -55℃~+105℃

Material: D14-80P
Insulator: 30% Glass fiber PBT
Contact Pin: Brass
plated: gold plated

100Y 编号	厂商编号	说明	Angle	Up(mm)	Pins 2 *?	Down(mm)	全长(mm)
28499	D13-06P	P:2.54mm 双排排针	180°	6	2*3	3.3	11.6
28084	D13-08P	P:2.54mm 双排排针	180°	6	2*4	3.3	11.6
28085	D13-12P	P:2.54mm 双排排针	180°	6	2*6		11.6
3823	D13-80P	P:2.54mm 双排排针	180°	6	2*40	3.3	11.6
7779	D14-80P	2.54mm 双排排针	90°	6	2*40	3.3	13.2
3473	D15-80P/18MM	2.54mm 双排排针	180°	12.8	40*2	3.3	18
11297	D15-80P/18MM/等长	2.54mm 双排排针	180°	7.8	40*2	7.8	18
23896	PPHS2-99-80-122	2.54mm 双排排针	180°	5	40*2	3	18

详细产品规格 - 请点击 cn.100y.com.tw

2.54mm 三排排针





说明:
额定电流: 1A
绝缘电阻: 5000MΩ Min at DC 500V
接触电阻: 20 MΩ MAX at DC 100mA
温度范围: -55℃~+105℃

Material: PHS3-40*3-254-3-6
Insulator: 30% Glass fiber PBT
Contact Pin: Brass




100Y 编号	厂商编号	说明	Angle	Pins 3 *?	Up(mm)	Down(mm)	全长(mm)
11540	PHS3-40*3-254-3-6	2.54mm 三排排针	180°	40*3	6	3	11



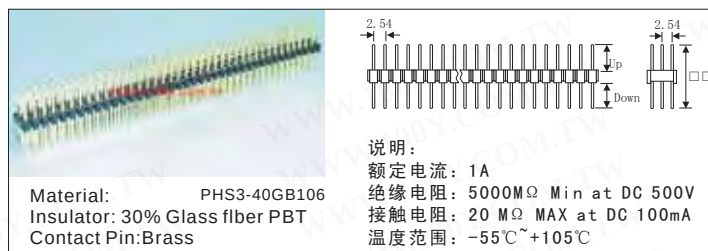



100Y 编号	厂商编号	说明	Angle	Pins 3*?	Up(mm)	Down(mm)	全长(mm)
11627	PHS3-40GB106	2.54mm 三排排针	180°	40*3	8	8	18

2.54mm 双排排针母座

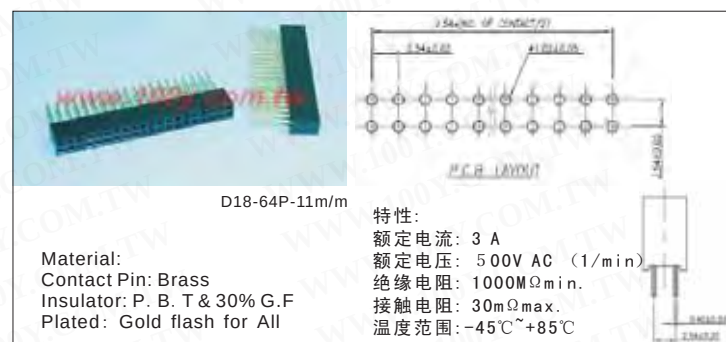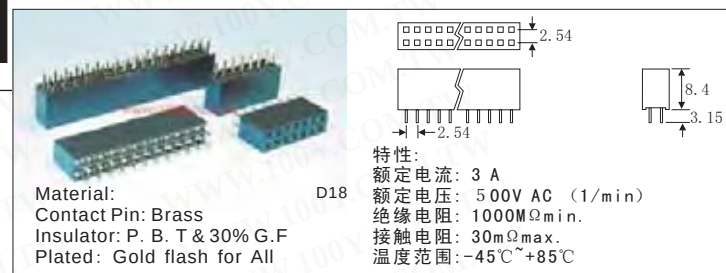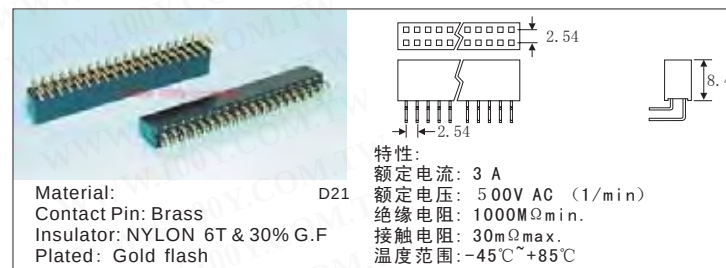

详细产品规格-请点击cn.100y.com.tw

2.54mm 单排排针母座

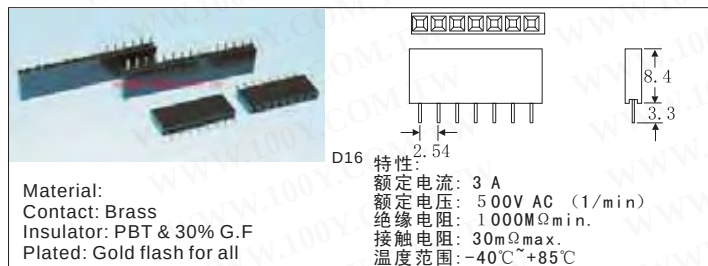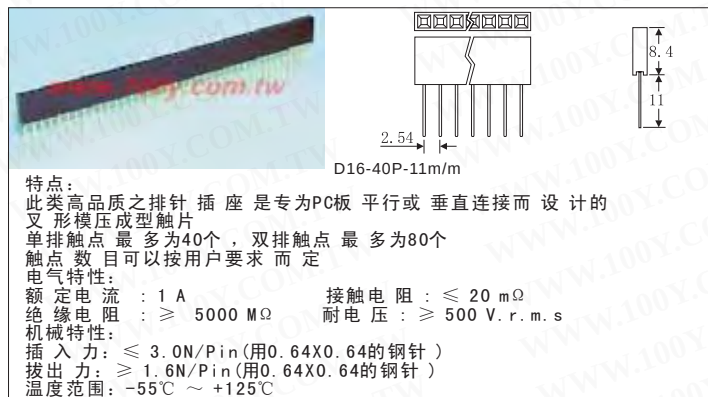

100Y 编号	厂商编号	说明	Angle	Pins 1*?	黑体长(mm)
37775	D16-03P	排针母座	180°	1*3	8.4
3967	D16-08P	排针母座	180°	1*8	8.4
3968	D16-10P	排针母座	180°	1*10	8.4
27519	D16-10P-1	排针母座 (针长:11mm)	180°	1*10	8.4
3969	D16-12P	排针母座	180°	1*12	8.4
3970	D16-15P	排针母座	180°	1*15	8.4
5786	D16-16P	排针母座	180°	1*16	8.4
3971	D16-20P	排针母座	180°	1*20	8.4
17538	D16-24P	排针母座	180°	1*24	8.4
39985	D16-34P	排针母座	180°	1*34	8.4
12959	D16-40P	排针母座	180°	1*40	8.4
14533	D16-40P-11m/m	排针母座	180°	1*40	8.4
27520	D18-20P-1	排针母座 (针长:11mm)	180°	1*20	8.4
29035	D20-15P	双排排针母座	90°	1*15	

100Y 编号	厂商编号	说明	Angle	Pins 2*?	黑体长(mm)
14792	D18-08P	双排排针母座	180°	2*4	8.4
3959	D18-10P	双排排针母座	180°	2*5	8.4
17615	D18-10P-11m/m	双排排针母座 (长脚)	180°	2*5	8.4
13403	D18-12P	双排排针母座	180°	2*6	8.4
3960	D18-14P	双排排针母座	180°	2*7	8.4
2716	D18-16P	双排排针母座	180°	2*8	8.4
2717	D18-20P	双排排针母座	180°	2*10	8.4
3962	D18-24P	双排排针母座	180°	2*12	8.4
3963	D18-26P	双排排针母座	180°	2*13	8.4
3961	D18-28P	双排排针母座	180°	2*14	8.4
2719	D18-30P	双排排针母座	180°	2*15	8.4
2718	D18-34P	双排排针母座	180°	2*17	8.4
3972	D18-40P	双排排针母座	180°	2*20	8.4
16746	D18-40P-11m/m	双排排针母座	180°	2*20	8.4
3964	D18-50P	双排排针母座	180°	2*25	8.4
3928	D18-52P	双排排针母座	180°	2*26	8.4
39754	D18-54P	双排排针母座	180°	2*27	8.4
3965	D18-60P	双排排针母座	180°	2*30	8.4
31120	D18-62P	双排排针母座	180°	2*31	8.4
3966	D18-64P	双排排针母座	180°	2*32	8.4
30155	D18-64P-11m/m	双排排针母座 (长脚)	180°	2*32	8.4
31631	D18-68P	双排排针母座	180°	2*34	8.4
25300	D18-80P	双排排针母座	180°	2*40	8.4
39736	D21-06P	双排排针母座	90°	2*3	8.4
5062	D21-10P	双排排针母座	90°	2*5	8.4
38122	D21-14P	双排排针母座	90°	2*7	8.4
5063	D21-20P	双排排针母座	90°	2*10	8.4
23431	D21-34P	双排排针母座	90°	2*17	8.4mm
5064	D21-40P	双排排针母座	90°	2*20	8.4

详细产品规格-请点击cn.100y.com.tw



服务专线:台湾:886-3-5753170

传 真:台湾:886-3-5753172

E-mail:台湾:sale@100y.com.tw

深圳:86-755-83298787

深圳:86-755-83640655

深圳:100y@163.com

上海:86-21-34970699

上海:86-21-64605107


上海:100y-1@163.com

10-16

欧式PCB端子台
MA/MB系列螺丝型PCB端子台



MA332-350M2G

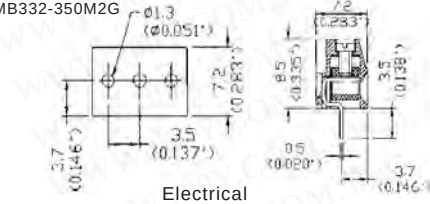


Electrical
Current rating: 8Amp AC300V
Insulation withstands volt: AC1500Vmin
Insulation resistance: >2000MO DC500V
PCB hole Dia: f1.3mm
Wire strip length: 4mm~5mm
Wire range: 16~26 AWG
Screw torque: 2.5 lb-inch

Material
Cage clamp: Brass, Ni plated
Terminal: Brass, Tin plated, 0.5t
Insulating body: Polyamide 66(UL94V-0)
Screw: M2.0, Steel, Ni plated
Environmental
Operation temperature: -40℃ to 105℃
Short-time temperature: up to 200℃ (392℉)



MA412-500M

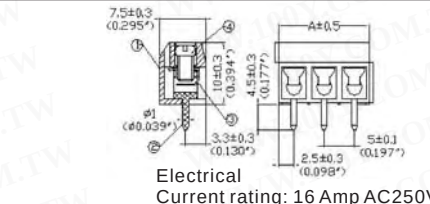

Electrical
Current rating: 16 Amp AC250V
Insulation Withstands Volt: AC1500V min
Insulation resistance: >5000MΩ DC500V
PCB hole Dia: φ 1.4mm
Wire strip length: 4 ~ 5mm
Wire range: 16 ~ 24 AWG
Screw torque: 4.0 lb-inch

Material
Terminal: Brass, Tin plated
Wire protector: Stainless strip steel
Insulating Body :Polyester
Screw: M3.0, steel, Ni plated
Color: Blue Environmental
Operation temperature: -33 ℃ to 105 ℃
Short-time temperature: up to 250℃ (392℉)


100Y 编号	厂商编号	制造厂商	说明	端子数	角度 °	角距
23949	MA412-500M-2B	DECA	PC 端子台 250V/16A	2P	180°	5.00mm
23951	MA412-500M-3B	DECA	PC 端子台 250V/16A	3P	5.00mm	180°
27846	MB332-350M2G		PC 端子台 250V/16A	2P	180°	3.50mm

详细产品规格 - 请点击cn.100y.com.tw

DT 系列螺丝型PCB端子台




DT-126RP-03P

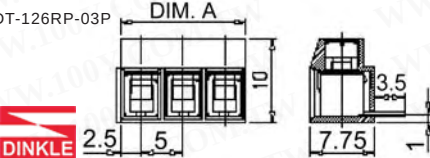

DIM. A




T3030450

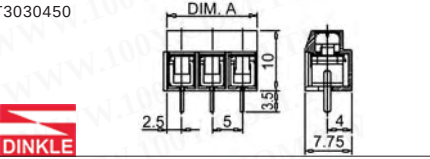

DIM. A



DT-128R-02P

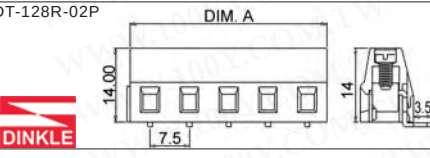

DIM. A

100Y 编号	厂商编号	制造厂商	说明	端子数	角距	角度 °
4214	DT-126RP-02P	DINKLE	PC 板端子台	2P	5.00mm	90°
4215	DT-126RP-03P	DINKLE	PC 板端子台	3P	5.00mm	90°
3956	DT-126VP-02P	DINKLE	PC 端子台 250V/10A	2P	5.00mm	180°
4119	DT-126VP-03P	DINKLE	PC 板端子台 250V/10A	3P	5.00mm	180°
11528	DT-128R-02P	DINKLE	PC 板端子台 250V/16A	2P	5mm	90°
4221	DT-128R-03P	DINKLE	PC 板端子台 250V/16A	3P	5mm	90°
36389	T3020450		PC 板端子台	2P	5mm	180°
36390	T3030450		PC 板端子台	3P	5mm	180°


详细产品规格 - 请点击cn.100y.com.tw

详细产品规格 - 请点击cn.100y.com.tw

5ES+5EH 系列插拔式端子台




5ES+5EH

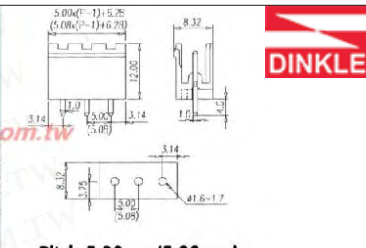

Pitch:5.00mm(5.08mm) 5EHVC-15P




OQ107150G
OQ047150G

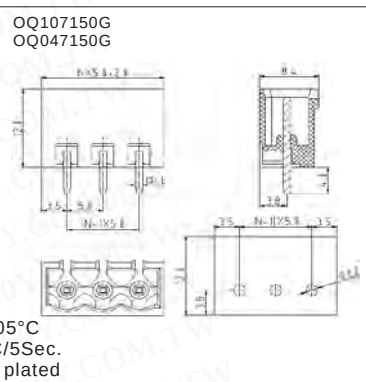

Electrical:
cULus VDE
Voltage rating: 300V 125V
Current rating: 15A 15A
Withstanding Voltage: 4KV
Operating temperature: -30℃ to +105℃
Soldering temperature: 245℃±10℃/5Sec.
Material: Contact pin: Brass with Tin plated
Insulator (housing):Thermoplastic(UL94V-0)




OQ027050G
5EHDV-15P

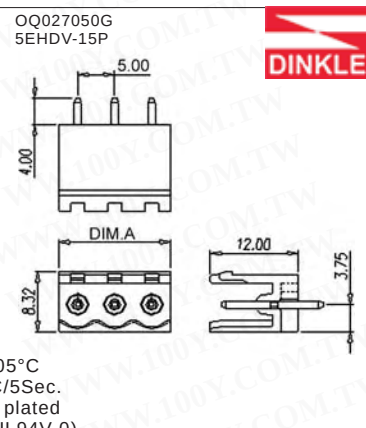

Electrical:
cULus VDE
Voltage rating: 300V 125V
Current rating: 15A 15A
Withstanding Voltage: 4KV
Operating temperature: -30℃ to +105℃
Soldering temperature: 245℃±10℃/5Sec.
Material: Contact pin: Brass with Tin plated
Insulator (housing):Thermoplastic(UL94V-0)






5EHDVM

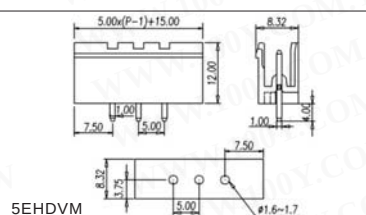

5EHDVM

绝缘材质: DINKLE端子台外观是以PA66为主要的绝缘材料, 物性安定, 具有燃烧自熄性 (符合UL94V-2 及UL94V-0) 及良好的弹性与硬度, 不易破裂。
导体材质: DINKLE使用的导电材料大部份为电解铜, 具有优良的导电特性及良好的化学安定性。另外, 为了在导体上直接攻牙, 部份导电材料采用BRASS, 以增强其螺牙承受扭力的能力。


100Y 编号	厂商编号	制造厂商	说明	角度 °	端子数	角距
27003	5EHVC-15P	DINKLE	5EH 公座端子台 250V/15A	180°	15P	5.00mm
5093	5EHDV-02P	DINKLE	5EH 公座端子台 250V/15A	180°	2P	5.00mm
5108	5EHDV-03P	DINKLE	5EH 公座端子台 250V/15A	180°	3P	5.00mm
5116	5EHDV-04P	DINKLE	5EH 公座端子台 250V/15A	180°	4P	5.00mm
4772	5EHDV-05P	DINKLE	5EH 公座端子台 250V/15A	180°	5P	5.00mm
5114	5EHDV-06P	DINKLE	5EH 公座端子台 250V/15A	180°	6P	5.00mm
16877	5EHDV-15P	DINKLE	5EH 公座端子台 250V/15A	180°	15P	5.00mm
11846	5EHDV-16P	DINKLE	5EH 公座端子台 250V/15A	180°	16P	5.00mm
13634	5EHDVM-04P	DINKLE	5EH 公座端子台	180°	4P	5.0mm
13726	5EHDVM-08P	DINKLE	5EH 公座端子台 250V 15A	180°	8P	5.00mm
36379	OQ047150G		OQ 公座端子台	180°	4P	5.00mm
36380	OQ107150G		OQ 公座端子台	180°	10P	5.00mm

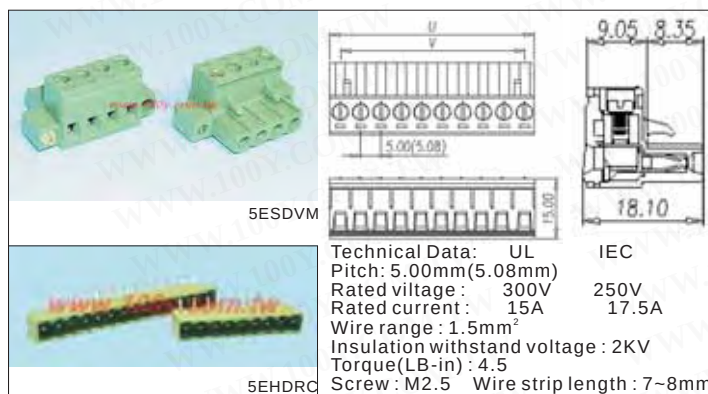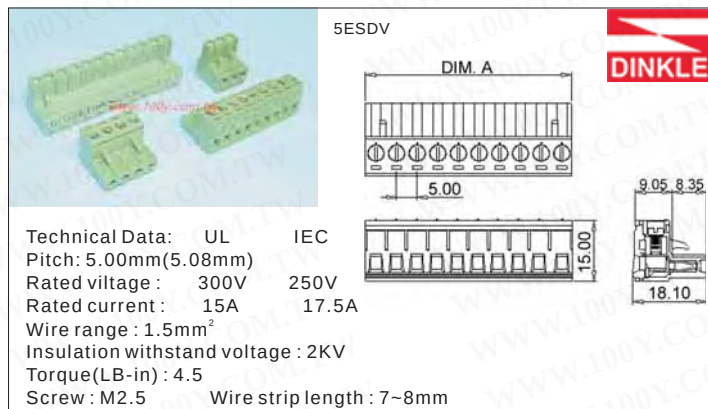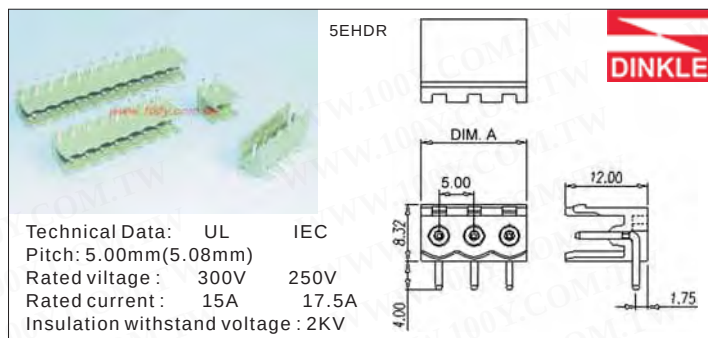

100Y 编号	厂商编号	制造厂商	说明	角度°	端子数	角距
27003	5EHVC-15P	DINKLE	5EH 公座端子台 250V/15A	180°	15P	5.00mm
2808	5EHDR-02P	DINKLE	5EH 公端子台 250V/15A	90°	2P	5.00mm
2809	5EHDR-03P	DINKLE	5EH 公端子台 250V/15A	90°	3P	5.00mm
4216	5EHDR-04P	DINKLE	5EH 公端子台 250V/15A	90°	4P	5.00mm
4218	5EHDR-05P	DINKLE	5EH 公端子台 250V/15A	90°	5P	5.00mm
4217	5EHDR-06P	DINKLE	5EH 公端子台 250V/15A	90°	6P	5.00mm
3172	5EHDR-07P	DINKLE	5EH 公座端子台 250V/15A	90°	7P	5.00mm
2796	5EHDR-08P	DINKLE	5EH 公座端子台 250V/15A	90°	8P	5.00mm
2807	5EHDR-09P	DINKLE	5EH 公座端子台 250V/15A	90°	9P	5.00mm
4219	5EHDR-10P	DINKLE	5EH 公座端子台 250V/15A	90°	10P	5.00mm
4220	5EHDR-12P	DINKLE	5EH 公端子台 250V/15A	90°	12P	5.00mm
16115	5EHDR-15P	DINKLE	5EH 公端子台 250V/15A	15P	5.00mm	90°
17924	5EHDRC-09P	DINKLE	5EH 公端子台 250V/15A	90°	9P	5.00mm
17923	5EHDRC-15P	DINKLE	5EH 公座端子台 250V/15A	90°	15P	5.00mm
2797	5ESDV-02P	DINKLE	5ES 母插头 FOR 端子台 250V/15A		2P	5.00mm
2798	5ESDV-03P	DINKLE	5ES 母插头 FOR 端子台		3P	5.00mm
3954	5ESDV-04P	DINKLE	5ES 母插头 FOR 端子台 250V/15A		4P	5.00mm
3173	5ESDV-05P	DINKLE	5ES 母插头 FOR 端子台 250V/15A		5P	5.00mm
3174	5ESDV-06P	DINKLE	5ES 母插头 FOR 端子台 250V/15A		6P	5.00mm
4212	5ESDV-07P	DINKLE	5ES 母插头 FOR 端子台 250V/15A		7P	5.00mm
3955	5ESDV-08P	DINKLE	5ES 母插头 FOR 端子台 250V/15A		8P	5.00mm
2800	5ESDV-09P	DINKLE	5ES 母插头 FOR 端子台 250V/15A		9P	5.00mm
4213	5ESDV-10P	DINKLE	5ES 母插头 FOR 端子台		10P	5.00mm
2801	5ESDV-12P	DINKLE	5ES 母插头 FOR 端子台 250V/15A		12P	5.00mm
14745	5ESDV-15P	DINKLE	5ES 母插头 FOR 端子台 250V/15A		15P	5.00mm
28457	5ESDV-16P	DINKLE	5ES 母插头 FOR 端子台 250V/15A		16P	5.00mm
13633	5ESDVM-04P	DINKLE	5ES 母插头 250V 15A FOR 端子台		4P	5.00mm
13725	5ESDVM-08P	DINKLE	5ES 母插头 for PCB 端子台 250V 15A		8P	5.00mm
36378	OQ027050G		OQ 公座端子台	180°	2P	5.00mm
36377	OQ027051		OQ 公座端子台	90°	2P	5.00mm
36384	TJ047150		TJ 母插头 FOR 端子台		4P	5.00mm

详细产品规格 - 请点击 cn.100y.com.tw


141, 142, 143, 144系列免用螺丝型端子台

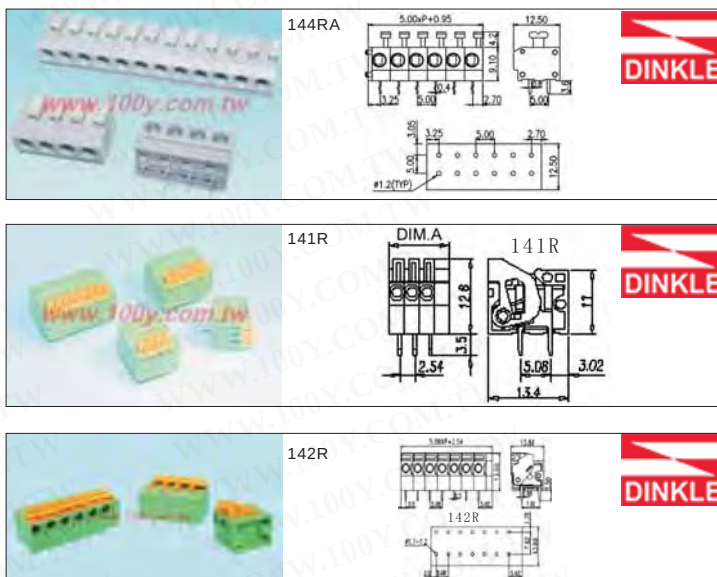

免螺丝式: 采用高信赖性的弹片盒做为夹线的结构, 是使用方便、耐震动、防松脱、信赖性高, 使用时直接将起子插入工具孔, 就可以称开弹片, 放入电线后取出工具即可被弹片盒紧紧夹住。

100Y 编号	厂商编号	制造厂商	说明	端子数	角度°	角距
12342	141R-03P	DINKLE	141 Series (Screwless) Terminal Blocks 8P	3P	90°	2.54mm
12343	141R-04P	DINKLE	141 Series (Screwless) Terminal Blocks 8P	4P	90°	2.54mm
12344	141R-05P	DINKLE	141 Series (Screwless) Terminal Blocks 8P	5P	90°	2.54mm
12345	141R-06P	DINKLE	141 Series (Screwless) Terminal Blocks 8P	6P	90°	2.54mm
12346	141R-08P	DINKLE	141 Series (Screwless) Terminal Blocks 8P	8P	90°	2.54mm
24683	142R-02P	DINKLE	142 Series (Screwless) Terminal Blocks	2P	90°	5.08mm
20487	142R-03P	DINKLE	142 Series (Screwless) Terminal Blocks	3P	90°	5.08mm
24684	142R-04P	DINKLE	142 Series (Screwless) Terminal Blocks	4P	90°	5.08mm
24685	142R-06P	DINKLE	142 Series (Screwless) Terminal Blocks	6P	90°	5.08mm
21943	142R-08P	DINKLE	142 Series (Screwless) Terminal Blocks	8P	90°	5.08mm
27791	142R-10P	DINKLE	142 Series (Screwless) Terminal Blocks	10P	90°	5.08mm
27792	142R-20P	DINKLE	142 Series (Screwless) Terminal Blocks	20P	90°	5.08mm
24049	144RA-12P	DINKLE	144 Series (Screwless) Terminal Blocks	8P	90°	5.00mm
24045	144RA-4P	DINKLE	144 Series (Screwless) Terminal Blocks	4P	90°	5.00mm
24047	144RA-6P	DINKLE	144 Series (Screwless) Terminal Blocks	6P	90°	5.00mm
24048	144RA-8P	DINKLE	144 Series (Screwless) Terminal Blocks	8P	90°	5.00mm

25系列-螺丝型PCB端子台

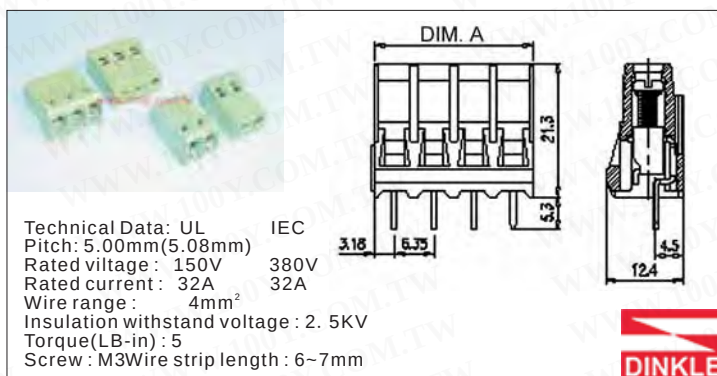




100Y 编号	厂商编号	制造厂商	说明	端子数	角距	角度°
14068	25EV-02P	DINKLE	25EV 母座端子台 300V/32A	2P	6.35mm	180°
14069	25EV-03P	DINKLE	25EV 母座端子台 300V/32A	3P	6.35mm	180°

详细产品规格 - 请点击 cn.100y.com.tw





EK, EEK, ELK, EHK 系列-螺丝型PCB端子台

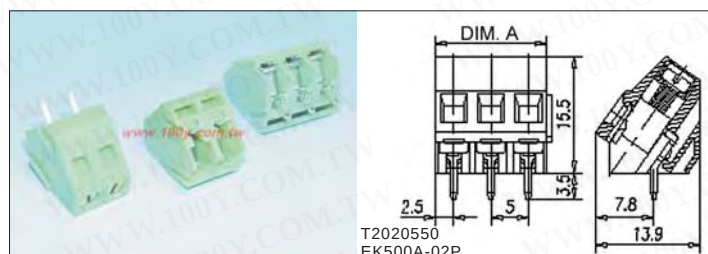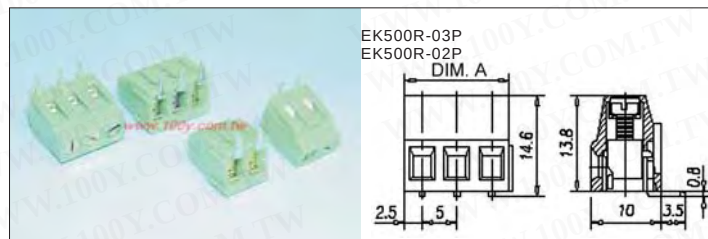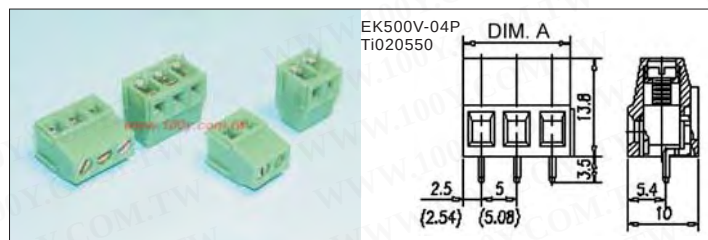


绝缘材质: DINKLE端子台外观是以PA66为主要的绝缘材料, 物性安定, 具有燃烧自熄性 (符合UL94V-2 及UL94V-0) 及良好的弹性与硬度, 不易破裂。
导体材质: DINKLE使用的导电材料大部份为电解铜, 具有优良的导电特性及良好的化学安定性。另外, 为了在导体上直接攻牙, 部份导电材料采用BRASS, 以增强其螺牙承受扭力的能力。

PC板型: 端子台可直接点焊在PCB板上, 让PCB板利用端子台来连接电线以达到讯息传输。




100Y 编号	厂商编号	制造厂商	说明	端子数	角距	角度°
3957	EK500A-02P	DINKLE	PC 板端子台 250V/16A	2P	5.0mm	135°
2810	EK500A-03P	DINKLE	PC 板端子台 250V/16A	3P	5.00mm	135°
3409	EK500R-02P	DINKLE	PC 板端子台 300V/10A	2P	5.00mm	90°
12315	EK500R-03P	DINKLE	PC 板端子台 300V/10A	3P	5.00mm	90°
2794	EK500V-02P	DINKLE	PC 板端子台 300V/10A	2P	5.0mm	180°
3408	EK500V-03P	DINKLE	PC 板端子台 300V/10A	3P	5.0mm	180°
38652	EK500V-04P	DINKLE	PC 板端子台 300V/10A-RoHS	4P	5.0mm	180°
36386	T2020550		PC 板端子台	2P	5.0mm	135°
36387	TI020550		PC 板端子台	2P	5.0mm	180°
36388	TI030550		PC 板端子台	3P	5.0mm	180°

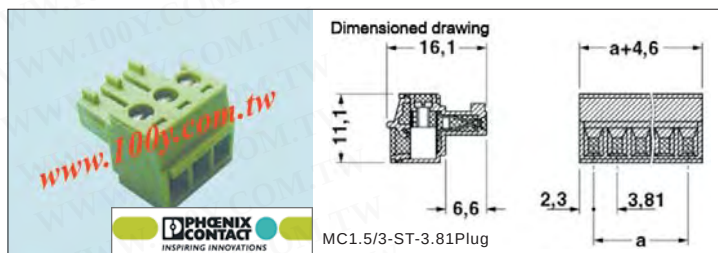

100Y 编号	厂商编号	制造厂商	说明	端子数	角距
36502	MC1.5/3-ST-3.81Plug	Phoenix	3P 母插头 FOR 端子台	3P	3.81mm


详细产品规格-请点击cn.100y.com.tw

EC+ECH 系列插拔式端子台

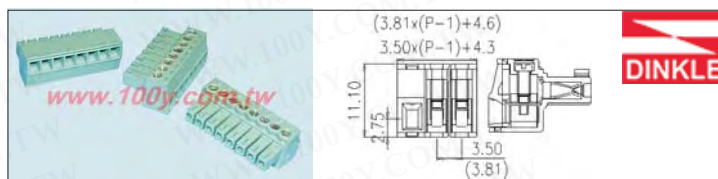


插拔式接线端子的插头提供不同间距的插头。为了因不同场合使用的需要, 提供水平、垂直插头与同方向的进线插头等选择EC&ESD 系列插头采用压线框接线方式, 无需维护, 接触面积大、耐振动、防松脱:

100Y 编号	厂商编号	制造厂商	说明	端子数	角距
16705	EC350V-05P	DINKLE	Pluggable Terminal Block	5P	3.81mm
16706	EC350V-08P	DINKLE	Pluggable Terminal Block	8P	3.81mm
36397	EC350V-15P	DINKLE	Pluggable Terminal Block	15P	3.81mm

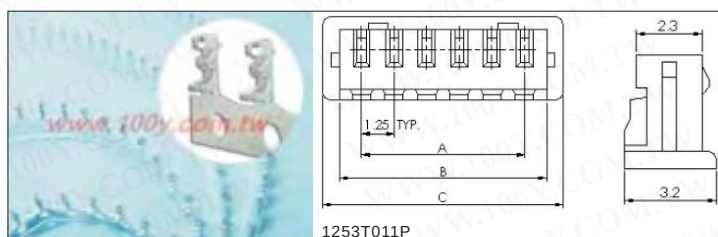PCB用电源连接头/座+夹具
1250 系列 1.25mm 连接座/头和端子

特性:

额定电流: 1 A AC, DC (AWG 26) 电压规定值: 125V AC, DC
额定电压: 250V AC/Min 绝缘电阻: 100MΩmin
接触电阻: 20mΩmax. 温度范围: -40℃~+85℃
可适用的个人计算机板厚度: 0.8mm

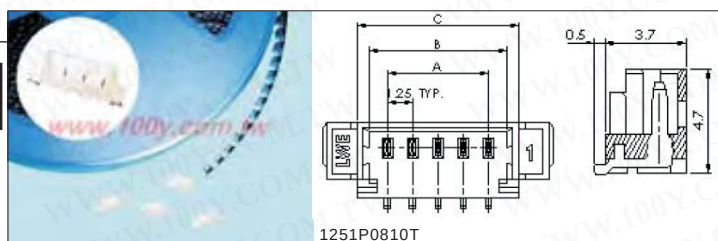

特性:

额定电流: 1 A AC, DC (AWG 26) 电压规定值: 125V AC, DC
额定电压: 250V AC/Min 绝缘电阻: 100MΩmin
接触电阻: 20mΩmax. 温度范围: -40℃~+85℃
可适用的个人计算机板厚度: 0.8mm

100Y 编号	厂商编号	说明	Parking	Pins	公/母座/头	角度°	Pitch
21368	1251P0210T-1	1251P Straight SMT Header	1000Pcs/R	2P	公座	180°	1.25mm
21369	1251P0310T	1251P Straight SMT Header	1000Pcs/R	3P	公座	180°	1.25mm
21370	1251P0410T	1251P Straight SMT Header	1000Pcs/R	4P	公座	180°	1.25mm
21371	1251P0510T	1251P Straight SMT Header	1000Pcs/R	5P	公座	180°	1.25mm
21372	1251P0610T	1251P Straight SMT Header	1000Pcs/R	6P	公座	180°	1.25mm
34349	1251P0810T	1251P Straight SMT Header	1000Pcs/R	8P	公座	180°	1.25mm
25798	1253T011P	1250 母座用端子			母端子		


详细产品规格-请点击cn.100y.com.tw

"Phoenix Contact"-螺丝型PCB端子台



100Y 编号	厂商编号	说明	端子数	角距
11872	PC4/8-ST-7.62	8P 母插头 FOR 端子台	8P	7.62mm



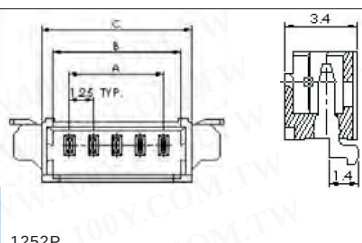

1252P

特性:

额定电流: 1 A AC, DC (AWG 26)

额定电压: 250V AC/Min

接触电阻: 20mΩ max.

可适用的个人计算机板厚度: 0.8mm

电压规定值: 125V AC, DC

绝缘电阻: 100MΩ min


温度范围: -40℃~+85℃



1250S0503



1250S1203



特性:

额定电流: 1 A AC, DC (AWG 26)

额定电压: 250V AC/Min

接触电阻: 20mΩ max.

可适用的个人计算机板厚度: 0.8mm


电压规定值: 125V AC, DC

绝缘电阻: 100MΩ min



温度范围: -40℃~+85℃

100Y 编号	厂商编号	说明	Parking	Pins	公/母座/头	角度°	Pitch
25788	1250S0203	1250S Single Row Housing		2P	母头	180°	
25789	1250S0303	1250S Single Row Housing		3P	母头	180°	
25790	1250S0403	1250S Single Row Housing		4P	母头	180°	
25791	1250S0503	1250S Single Row Housing		5P	母头	180°	
25792	1250S0603	1250S Single Row Housing		6P	母头	180°	
25793	1250S0703	1250S Single Row Housing		7P	母头	180°	
25794	1250S0803	1250S Single Row Housing		8P	母头	180°	
25795	1250S0903	1250S Single Row Housing		9P	母头	180°	
23815	1250S1003	1250S Single Row Housing		10P	母头	180°	1.25mm
25796	1250S1103	1250S Single Row Housing		11P	母头	180°	
25797	1250S1203	1250S Single Row Housing		12P	母头	180°	
23816	1250S1503	1250S Single Row Housing		15P	母头	180°	1.25mm
21362	1252P0210T	1252P Right Angle SMT Header	1000Pcs/R	2P	公座	90°	1.25mm
21366	1252P0310T	1252P Right Angle SMT Header	1000Pcs/R	3P	公座	90°	1.25mm
21381	1252P0410T	1252P Right Angle SMT Header	1000Pcs/R	4P	公座	90°	1.25mm
21382	1252P0510T	1252P Right Angle SMT Header	1000Pcs/R	5P	公座	90°	1.25mm
21383	1252P0610T	1252P Right Angle SMT Header	1000Pcs/R	6P	公座	90°	1.25mm

详细产品规格-请点击cn.100y.com.tw

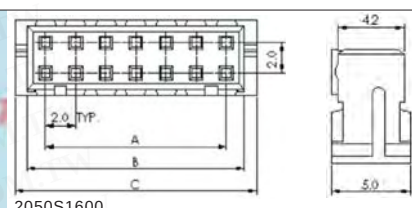


2050S1600

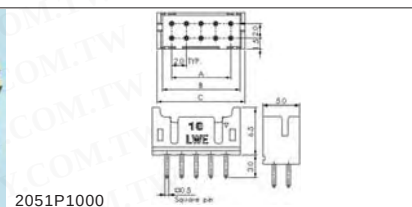


2051P1000

100Y 编号	厂商编号	说明	公/母座/头	角度°	Pins	Pitch
23444	2050S1000	2050S Housing	母头	180°	10P(2*5)	2.0mm
23364	2050S1200	2050S Housing	母头	180°	12P(2*6)	2.0mm
23449	2050S1400	2050S Housing	母头	180°	14P(2*7)	2.0mm
23450	2050S1600	2050S Housing	母头	180°	16P(2*8)	2.0mm
23451	2051P1000	2051P Straight Header	公座	180°	10P(2*5)	2.0mm
23452	2051P1200	2051P Straight Header	公座	180°	12P(2*6)	2.0mm
23455	2051P1400	2051P Straight Header	公座	180°	14P(2*7)	2.0mm
23456	2051P1600	2051P Straight Header	公座	180°	16P(2*8)	2.0mm

7015 系列 2.0mm 连接座/头和端子



F27



特性:

额定电流: 2 A AC, DC (AWG 26)

电压规定值: 250V AC, DC

额定电压: 800V AC/Min

绝缘电阻: 1000MΩ min

接触电阻: Initial Value /10mΩ max.

Alter environmental

Testing /20mΩ max.

温度范围: -25℃~+85℃


可适用的个人计算机板厚度: 0.8~1.6mm

MATERIAL:
Insulator: NYLON 66 UL 94V-0
Post: Brass
Plating: tin plated

100Y 编号	厂商编号	说明	Pitch	Pins	公/母座/头	角度°
4447	F27-02P	7015 Series Straight Header	2.0mm	2P	公座	180°
4448	F27-03P	7015 Series Straight Header	2.0mm	3P	公座	180°
4449	F27-04P	7015 Series Straight Header	2.0mm	4P	公座	180°
4450	F27-05P	7015 Series Straight Header	2.0mm	5P	公座	180°
4451	F27-06P	7015 Series Straight Header	2.0mm	6P	公座	180°
4753	F27-07P	7015 Series Straight Header	2.0mm	7P	公座	180°
4452	F27-08P	7015 Series Straight Header	2.0mm	8P	公座	180°
4454	F29-02P	7015 Series Housing	2.0mm	2P	母头	180°
4455	F29-03P	7015 Series Housing	2.0mm	3P	母头	180°
4456	F29-04P	7015 Series Housing	2.0mm	4P	母头	180°
4457	F29-05P	7015 Series Housing	2.0mm	5P	母头	180°
4458	F29-06P	7015 Series Housing	2.0mm	6P	母头	180°
4777	F29-07P	7015 Series Housing	2.0mm	7P	母头	180°
4459	F29-08P	7015 Series Housing	2.0mm	8P	母头	180°
23738	F29-10P	7015 Series Housing	2.0mm	10P	母头	180°
23739	F29-12P	7015 Series Housing	2.0mm	12P	母头	180°

详细产品规格-请点击cn.100y.com.tw

2050 系列 2.0mm 连接座/头和端子

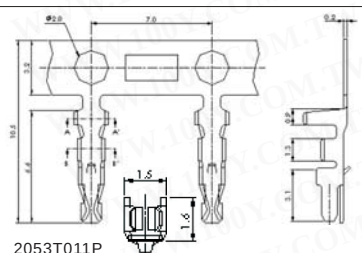

2053T011P

100Y 编号	厂商编号	说明	公/母座/头	角度°	Packing
23365	2053T011P	2053T Terminal	母针		10,000 pcs/R

详细产品规格-请点击cn.100y.com.tw



服务专线:台湾:886-3-5753170

传 真:台湾:886-3-5753172

E-mail:台湾:sale@100y.com.tw

深圳:86-755-83298787

深圳:86-755-83640655

深圳:100y@163.com

上海:86-21-34970699

上海:86-21-64605107

上海:100y-1@163.com











10-20



详细产品规格 - 请点击 cn.100y.com.tw

Mini-DIN连接头/座


Mini-DIN 插板式母座

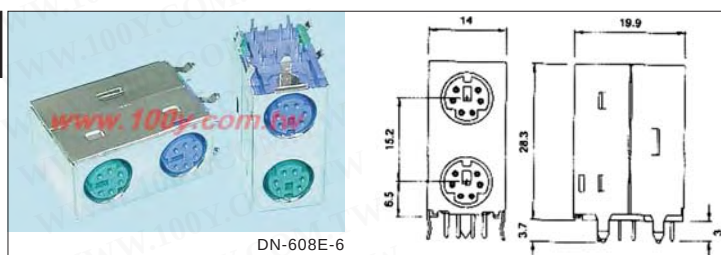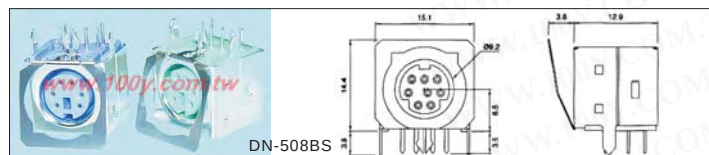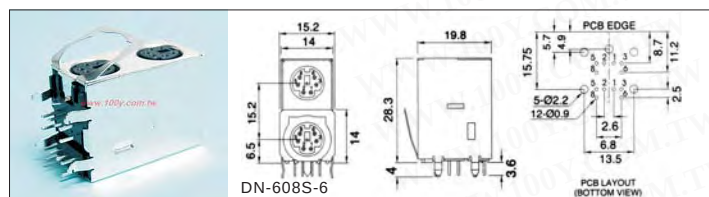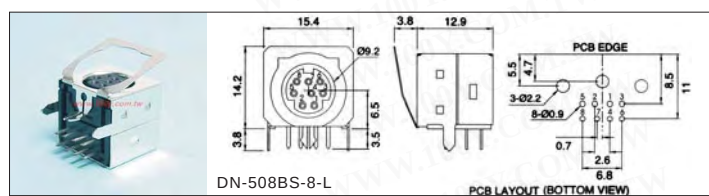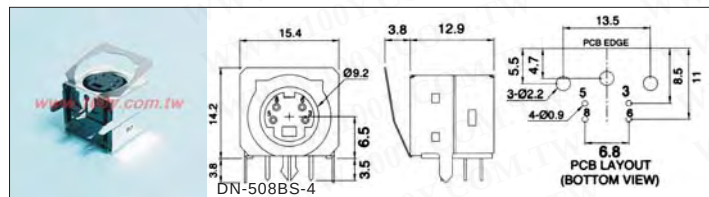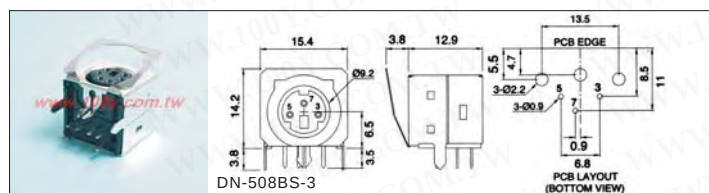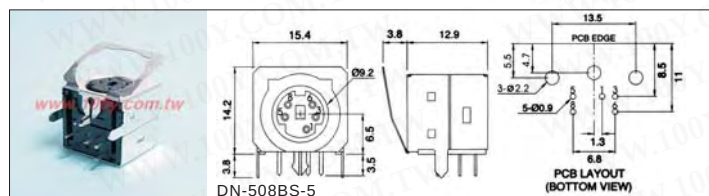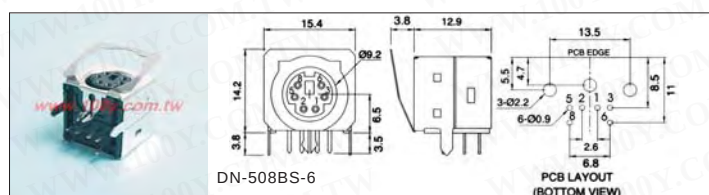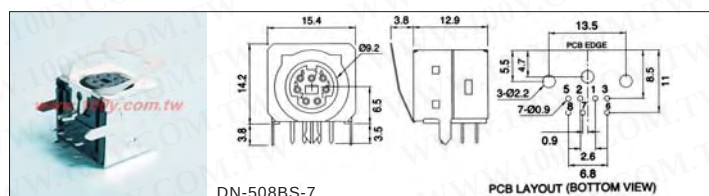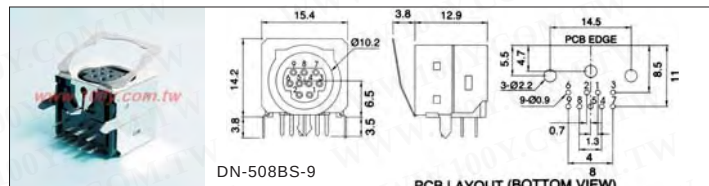

100Y 编号	厂商编号	说明	Pins	颜色
12655	DN-508BS-3	Mini-DIN 插板式母座	3P	黑
12220	DN-508BS-4	Mini-DIN 插板式母座	4P	黑
12656	DN-508BS-5	Mini-DIN 插板式母座	5P	黑
12657	DN-508BS-6	Mini-DIN 插板式母座	6P	黑
18922	DN-508BS-6B	Mini-DIN 插板式母座	6P	Green
18921	DN-508BS-6C	Mini-DIN 插板式母座	6P	Purple
12658	DN-508BS-7	Mini-DIN 插板式母座	7P	黑
10271	DN-508BS-8-L	Mini-DIN 插板式母座	8P	黑
12659	DN-508BS-9	Mini-DIN 插板式母座	9P	黑
18924	DN-608E-6	Shielded Double mini-DIN 插板式母座	2*6P	Green on Top Purple on Bottom
10177	DN-608S-6	Mini DIN 插板式双头母座	6p	



详细产品规格 - 请点击 cn.100y.com.tw

Mini-DIN 有耳面板用焊线式母座

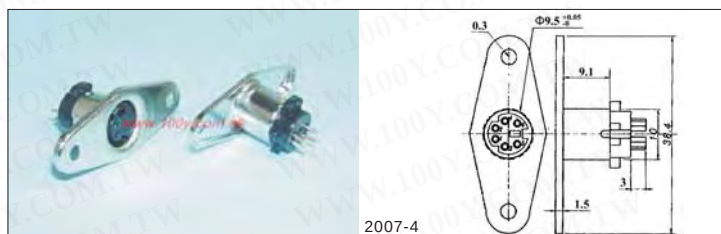

100Y 编号	厂商编号	说明	Pins
3846	2007-4	Mini DIN 有耳母座	4P

Mini-DIN 空中焊线式连接头

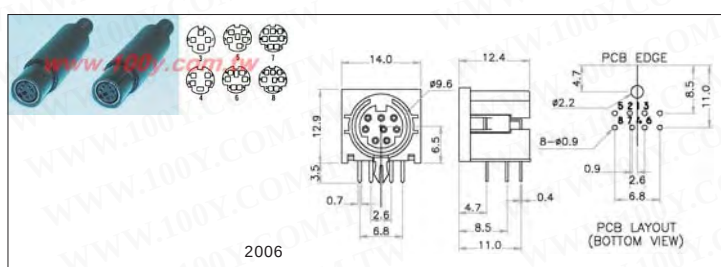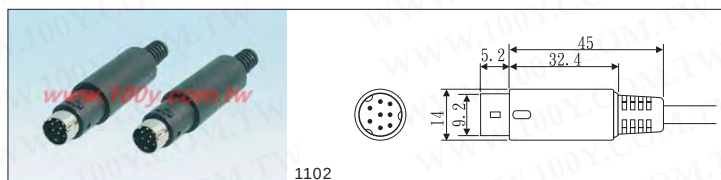

100Y 编号	厂商编号	说明	Pins	公/母 头
17983	1102-3	Mini-DIN 空中焊线式连接头	3P	公插头
17576	1102-4	Mini-DIN 空中焊线式连接头	4P	公插头
17984	1102-5	Mini-DIN 空中焊线式连接头	5P	公插头
17985	1102-6	Mini-DIN 空中焊线式连接头	6P	公插头
17986	1102-7	Mini-DIN 空中焊线式连接头	7P	公插头
12527	1102-8	Mini-DIN 空中焊线式连接头	8P	公插头
17982	1102-9	Mini-DIN 空中焊线式连接头	9P	公插头
30858	2006-5P	Mini-DIN 空中焊线式连接头	5P	母头
15477	2006-6	Mini-DIN 空中焊线式连接头	6P	母头
12475	2006-8	Mini-DIN 空中焊线式连接头	8P	母头

详细产品规格 - 请点击 cn.100y.com.tw





MIL-C-5015 圆形军规连接头

Ms3101 系列铝合金连接头和附件(防水型)

详细产品规格 - 请点击 cn.100y.com.tw



100Y 编号	厂商编号	说明	尺寸 (mm)	插脚	M/F Plug Socket	Rate Current/Voltage
28958	MS3101A-20-16P	9P 公插座 21A 500Vac	32.13	9P	公座	13A~20A 500Vac

MS3102 系列铝合金连接头和附件(防水型)



MS3102A-20-15P



MS3102A-32-17P




MS3102A-14S-9S




MS3102A-28-21P



MS3102A-20-4S

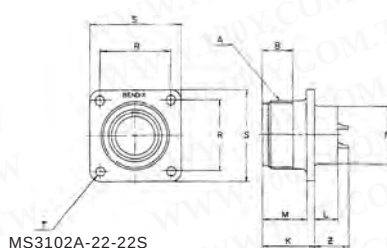

MS3102A-22-22S



MS3057-4A

100Y 编号	厂商编号	说明	Shell Size (mm)	Pins	M/F Plug Socket	Rate Current/Voltage
22953	MS3057-4A	电缆夹	10SL-12-12S			
22949	MS3102A-10SL-3P	3P 公插座 13A~20A 500Vac	18.2	3P	公头	13A~20A/500Vac/700Vdc
31619	MS3102A-10SL-3S	3P 母头 13A~20A 500Vac	18.2	3P	母头	13A~20A/500Vac/700Vdc
29217	MS3102A-14S-2P	4P 公插座 13A~20A 200Va	23	4P	公头	13A~20A/200Vac/250Vdc
31617	MS3102A-14S-2S	4P 母头 13A~20A 200Vac	23	4P	母头	13A~20A/200Vac/250Vdc
27783	MS3102A-14S-5P	5P 公插座 13A~20 200Va	23	5P	公头	13A~20A/200Vac/250Vdc
33261	MS3102A-14S-5S	5P 母头 13A~20A 200Vac	23	5P	母头	13A~20A/200Vac/250Vdc
29835	MS3102A-14S-6P	6P 公插座 13A~20A 200Va	23	6P	公头	13A~20A/200Vac/250Vdc
31615	MS3102A-14S-6S	6P 母头 13A~20A 200Vac	23	6P	母头	13A~20A/200Vac/250Vdc
27781	MS3102A-14S-7P	3P 公插座 13A~20A 500Va	23	3P	公头	13A~20A/500Vac/700Vdc
33887	MS3102A-14S-7S	3P 母头 13A~20A 200Vac	23	3P	母头	13A~20A/200Vac/250Vdc
27782	MS3102A-14S-9P	2P 公插座 13A~20A 500Va	23	2P	公头	13A~20A/500Vac/700Vdc
33888	MS3102A-14S-9S	2P 母头 13A~20A 200Vac	23	2P	母头	13A~20A/200Vac/250Vdc
35792	MS3102A-16-10P	3P 公插座 23A~35A 500Vac	24.6	3P	公头	23A~35A/500Vac/700Vdc
39412	MS3102A-18-10S	17P 母头 13A~20A 500Vac	29.4	17P	母头	13A~20A/500Vac/700Vdc
22942	MS3102A-18-1P	10P 公插座 13A~20A 500Vac	27	10P	公头	13A~20A/500Vac/700Vdc
31618	MS3102A-18-1S	10P 母头 13A~20A 200Vac (B,C,F,G=500Vac)	27	10P	母头	13A~20A/200Vac/250Vdc
38773	MS3102A-20-15P	7P 公插座 23A~35A 500Vac	29.4	7P	公头	23A~35A/500Vac/700Vdc
28462	MS3102A-20-16P	9P 公插座	29.4	9P	公头	13A~20A/23A~35A/500Vac/700Vdc
33891	MS3102A-20-16S	9P 母头 21A 500Vac	29.4	9P	公头	13A~20A/23A~35A/500Vac/700Vdc
22964	MS3102A-20-29P	17P 公插座 21A 500Vac	29.4	17P	公头	13A~20A/500Vac/700Vdc
31614	MS3102A-20-29S	17P 母头 13A~20A 500Vac	29.4	17P	母头	13A~20A/500Vac/700Vdc
31613	MS3102A-20-4S	37P 母头 23A~35A 900Vac	29.4	4P	母头	23A~35A/900Vac/1250Vdc
31940	MS3102A-22-22P	4P 公插座 46A~60A 500Vac	31.8	4P	公头	46A~60A/500Vac/700Vdc
31942	MS3102A-22-22S	4P 母头 13A~20A 500Vac	31.8	4P	母头	46A~60A/500Vac/700Vdc
30874	MS3102A-28-21P	37P 公插座 13A~20A 500Vac	39.7	37P	公头	13A~20A/500Vac/700Vdc
39198	MS3102A-28-21S	37P 母头 13A~20A 500Vac	39.7	37P	母头	13A~20A/500Vac/700Vdc
40425	MS3102A-32-17P	37P 公插座 80A~110A 900Vac	44.5	4P	公头	80A~110A/900Vac/1250Vdc
40426	MS3102A-32-17S	4P 母头 80A~110A 900Vac	44.5	4P	母头	80A~110A/900Vac/1250Vdc

MS3106 系列铝合金连接头和附件(防水型)

详细产品规格 - 请点击 cn.100y.com.tw




MS3106A-16-10P




MS3106A-16-10S







MS3106B-18-1S

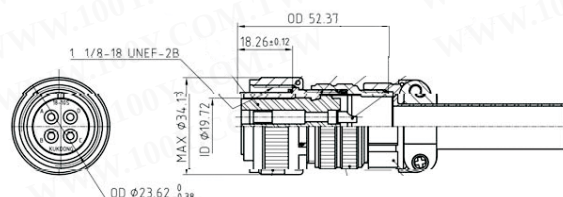

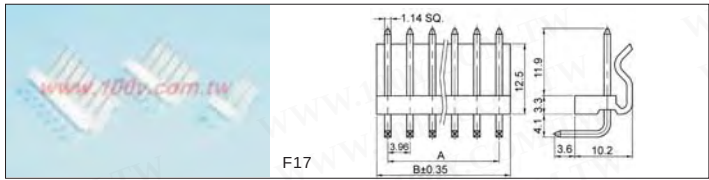



100Y 编号	厂商编号	说明	公/母 座/头	Pins	角度 °
4535	F17-02P	5004-2P 公座 3.96mm 90°	公座	2P	90°
4536	F17-03P	5004-3P 公座 3.96mm 90°	公座	3P	90°
4537	F17-04P	5004-4P 公座 3.96mm 90°	公座	4P	90°
4538	F17-05P	5004-5P 公座 3.96mm 90°	公座	5P	90°
4539	F17-06P	5004-6P 公座 3.96mm 90°	公座	6P	90°
4540	F17-07P	5004-7P 公座 3.96mm 90°	公座	7P	90°
4542	F17-08P	5004-8P 公座 3.96mm 90°	公座	8P	90°
4543	F17-10P	5004-10P 公座 3.96mm 90°	公座	10P	90°
4544	F17-12P	5004-12P 公座 3.96mm 90°	公座	12P	90°

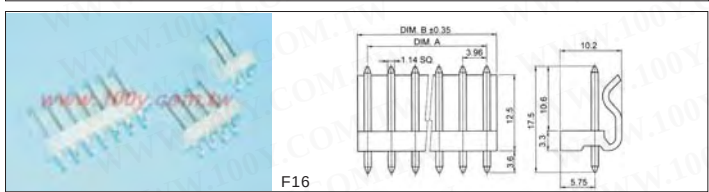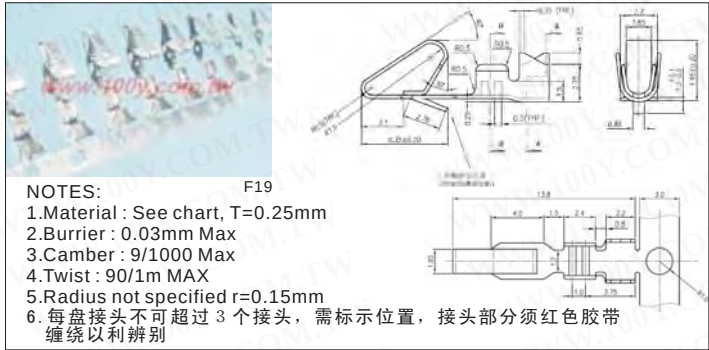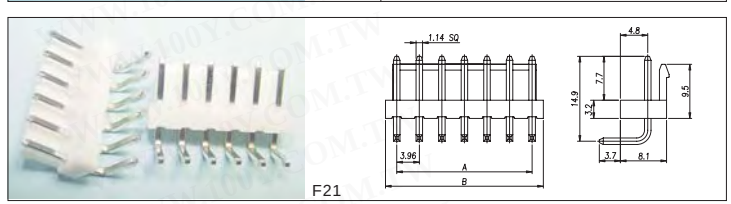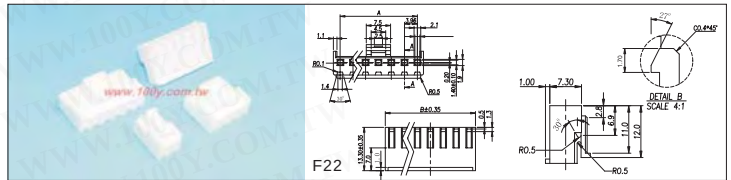

100Y 编号	厂商编号	说明	公/母 座/头	Pins	角度 °
2341	F16-02P	5004-2P 公座 3.96mm 180°	公座	2P	180°
11669	F16-03P	5004-3P 公座 3.96mm 180°	公座	3P	180°
7837	F16-04P	5004-4P 公座 3.96mm 180°	公座	4P	180°
12348	F16-05P	5004-5P 公座 3.96mm 180°	公座	5P	180°
5054	F16-06P	5004-6P 公座 3.96mm 180°	公座	6P	180°
12349	F16-07P	5004-7P 公座 3.96mm 180°	公座	7P	180°
2926	F16-08P	5004-8P 公座 3.96mm 180°	公座	8P	180°
12351	F16-10P	5004-10P 公座 3.96mm 180°	公座	10P	180°
2342	F16-12P	5004-12P 公座 3.96mm 180°	公座	12P	180°
12388	F16-16P	5004-16P 公座 3.96mm 180°	公座	16P	180°
2322	F19	5004 3.96mm 端子			

详细产品规格 - 请点击 cn.100y.com.tw

7009 系列 3.96mm 公座/母头和端子

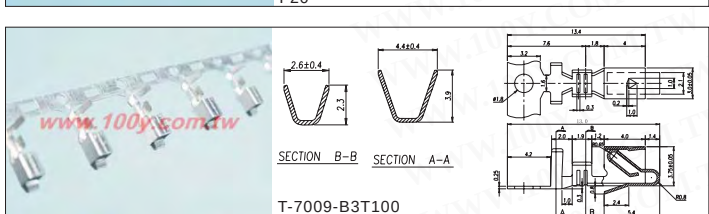
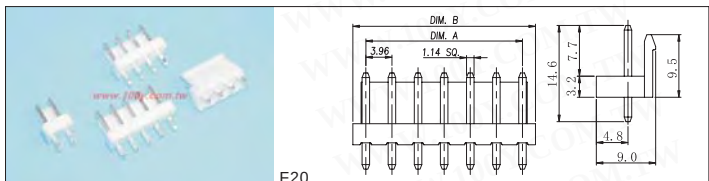


100Y 编号	厂商编号	说明	Parking
14251	T-7009-B3T100	7009T 镀锡铅 母 Pin	4,000PCS/R

100Y 编号	厂商编号	说明	公/母 座/头	Pins	角度 °	Pitch
4659	F20-02P	7009 2P 公座 3.96mm 180°	公座	2P	180°	
4661	F20-03P	7009 3P 公座 3.96mm 180°	公座	3P	180°	
4667	F20-04P	7009 4P 公座 3.96mm 180°	公座	4P	180°	
4727	F20-05P	7009 5P 公座 3.96mm 180°	公座	5P	180°	
4728	F20-06P	7009 6P 公座 3.96mm 180°	公座	6P	180°	
32047	F20-07P	7009 7P 公座 3.96mm 180°	公座	7P	180°	
32048	F20-08P	7009 8P 公座 3.96mm 180°	公座	8P	180°	
28640	F21-02P	7009 Series 3.96mm	公座	2P	90°	3.96mm
28641	F21-03P	7009 Series 3.96mm	公座	3P	90°	3.96mm
28642	F21-04P	7009 Series 3.96mm	公座	4P	90°	3.96mm
28643	F21-05P	7009 Series 3.96mm	公座	5P	90°	3.96mm
13394	F21-06P	7009 Series 3.96mm	公座	6P	90°	3.96mm
32049	F21-07P	7009 Series 3.96mm	公座	7P	90°	3.96mm
32051	F21-08P	7009 Series 3.96mm	公座	8P	90°	3.96mm
28995	F21-12P	7009 Series 3.96mm	公座	12P	90°	3.96mm
2333	F22-02P	7009 2P 母头 3.96mm VH	母头	02P		
7836	F22-03P	7009 3P 母头 3.96mm VH	母头	3P		
7835	F22-04P	7009 4P 母头 3.96mm VH	母头	4P		
5056	F22-05P	7009 5P 母头 3.96mm VH	母头	5P		
11668	F22-06P	7009 6P 母头 3.96mm VH	母头	6P		
32052	F22-07P	7009 7P 母头 3.96mm VH	母头	7P		
32053	F22-08P	7009 8P 母头 3.96mm VH	母头	8P		

详细产品规格 - 请点击 cn.100y.com.tw

7010 系列 5.0mm 阻立公座/母头和端子

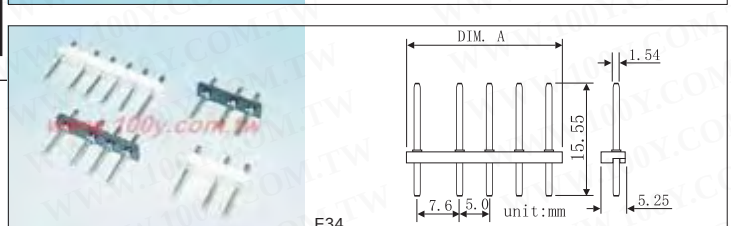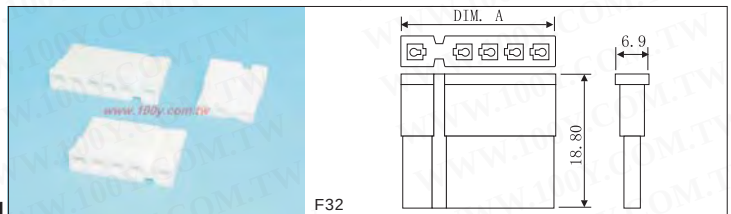

TERMINAL MATERIAL: 0.25T, PHOS. BRONZE, BRASS
PLATING: COPPER-UNDERCOATED, TIN-PLATED
WIRE RANG: SUITABLE FOR AWG #20-#26
HOUSING MATERIA L: NYLON 66, UL94V-0, V-2
WAFER POST: BRASS, $\Phi 1.55$ ($\Phi 0.61''$) ROUND PIN, TIN-PLATED
CIRCUITS: 1-6

100Y 编号	厂商编号	说明	公/母 座/头	Pins	角度 °
4599	F32-03P	7010-3P 阻立母头 5.0mm	母头	3P	
4600	F32-04P	7010-4P 阻立母头 5.0mm	母头	4P	
4601	F32-05P	7010-5P 阻立母头 5.0mm	母头	5P	
4602	F32-06P	7010-6P 阻立母头 5.0mm	母头	6P	
4589	F34-03P	7010-3P 阻立接头公座 5.0mm	公座	3P	180°
4590	F34-04P	7010-4P 阻立接头公座 5.0mm	公座	4P	180°
4591	F34-05P	7010-5P 阻立接头公座 5.0mm	公座	5P	180°
4593	F34-06P	7010-6P 阻立接头公座 5.0mm	公座	6P	180°

详细产品规格 - 请点击 cn.100y.com.tw

5080 系列 5.08mm 公座/母头和端子

说明:
 额定电流: 7A AC DC
 电压规定值: 250v ac maximum
 温度范围: -25℃~90℃
 接触电阻: Initial value/10m max
 After environmental testing/20m max
 绝缘电阻: 1000MΩ min
 承受电压: 1500v ac/minute
 可适用的个人计算机板厚度:
 0.63" (1.6mm)

FEATURES:
 2-20 CIRCUITS
 45" (1.14mm) square or round wire pins
 nylon (UL 94V-2)
 Right angle or straight pins
 Mate with center crimp connector

100Y 编号	厂商编号	说明	公/母 座/头	Pins	角度 °	Pitch
4628	F24-02P	5081P 公座	公座	2P	180°	5.08mm
27878	F24-03P	5080 系列 5.08mm 公座	公座	2P	180°	5.08mm
4629	F24-04P	5081P 公座	公座	4P	180°	5.08mm
4630	F24-06P	5081P 公座	公座	6P	180°	5.08mm
4632	F24-08P	5081P 公座	公座	8P	180°	5.08mm
4799	F24-10P	5081P 公座	公座	10P	180°	5.08mm
4634	F24-12P	5081P 公座	公座	12P	180°	5.08mm

说明:
 额定电流: 7A AC DC
 电压规定值: 250v ac maximum
 温度范围: -25℃~90℃
 接触电阻: Initial value/10m max
 After environmental testing/20m max
 承受电压: 1500v ac/minute
 可适用的导线: awg#22~#18

100Y 编号	厂商编号	说明	公/母 座/头	Pins	角度 °	Pitch
4638	F26-02P	5080S 母头	母头	2P	180°	5.08mm
28912	F26-03P	5080S 母头	母头	3P	180°	5.08mm
4640	F26-04P	5080S 母头	母头	4P	180°	5.08mm
4641	F26-06P	5080S 母头	母头	6P	180°	5.08mm
4642	F26-08P	5080S 母头	母头	8P	180°	5.08mm
4643	F26-10P	5080S 母头	母头	10P	180°	5.08mm
4645	F26-12P	5080S 母头	母头	12P	180°	5.08mm

7004, 7001 系列 5.08mm磁碟机电源公座/母头和Pins (大4P)

TERMINAL
 MATERIAL: 0.25T BRASS
 PLATING: COPPER-UNDERCOATED, TIN-PLATED
 HOUSING MATERIAL: NYLON 66, UL 94V-0, V-2
 WAFERTOP ENTRY: ATW-04
 SIDE ENTRY: ATW-04R
 IDT TYPE: AHT-04
 WIRE TO WIRE TYPE: AH-04, ARH-04
 CIRCUITS: 4

TERMINAL
 T-7001-B30100
 MATERIAL: 0.25T BRASS
 PLATING:
 COPPER-UNDERCOATED, TIN-PLATED
 HOUSING MATERIAL:
 NYLON 66, UL 94V-0, V-2
 WAFERTOP ENTRY: ATW-04
 SIDE ENTRY: ATW-04R
 IDT TYPE: AHT-04
 WIRE TO WIRE TYPE: AH-04, ARH-04
 CIRCUITS: 4

100Y 编号	厂商编号	说明	Parking
13439	T-7001-B30100	CONTACT 7001T2-母端 GOLD FLASH BRASS C2680R-H	1,000PCS/R
14140	T-7001-B3T-100	CONTACT 7001T2-母端 FLASH BRASS C2680R-H	5,000PCS/R

NOTES: 1. MATERIAL: C2680R-H, T=0.25mm 2. BURRIER: 0.05mm MAX.

100Y 编号	厂商编号	说明	Parking
13440	T-7004-B30100	CONTACT 7004T-公端 GOLD FLASH BRASS C2680R-H	1,000PCS/R
12546	T-7004-B3T100	Contact 7004T-公-镀锡铅 Brass C2680R-H	5,000PCS/R


材料: NYLON 66 94V-2
 颜色: 白色

post: brass, tin/ plated
 base: nylon 66, ul94v-2.


100Y 编号	厂商编号	说明	Pins	公/母 座/头	角度 °
4611	F49 (P-7004-N2-W10400)	磁盘驱动器电源母头-大 4P	4P	母头	
30156	F49-3P	磁盘驱动器电源母头-大 4P	3P	母头	180
4496	F52-04P	磁盘驱动器电源公座-大/插板	4P	公座	180°



材料: Post: 黄铜, 锡/镀金 F53
Base: 尼龙 66, UL94V-2

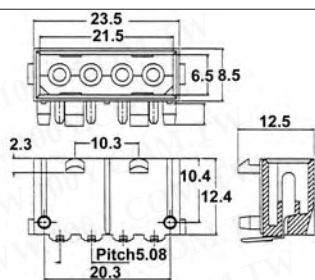


材料: nylon 66 UL94-2 F48
颜色: 白色

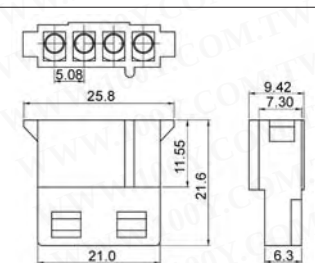


100Y 编号	厂商编号	说明	Pins	公/母	座/头	角度°
4614	F48 (P-7001-N2-W10400)	磁盘驱动器电源公头-大 4P	4P	公头		180°
30157	F48-3P	磁盘驱动器电源公头-大 4P	3P	公头		180°
4605	F53-04P	磁盘驱动器电源公座-大/ 插板	4P	公座		90°

详细产品规格 - 请点击 cn.100y.com.tw

6350 系列 6.35mm 连接座/头和端子

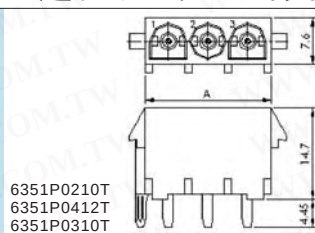


规格说明:
额定电流: 10A AC, DC (AWG 14)
承受电压: 5000V AC/Minute
绝缘电阻: 1000 mΩ Min
电压规定值: 600V AC, DC
接触电阻: 10mΩ Max
温度范围: -55°C to +150°C

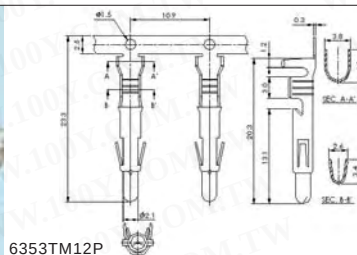


规格说明:
额定电流: 10A AC, DC (AWG 14)
承受电压: 5000V AC/Minute
绝缘电阻: 1000 mΩ Min
电压规定值: 600V AC, DC
接触电阻: 10mΩ Max
温度范围: -55°C to +150°C


100Y 编号	厂商编号	说明	Pins	公/母	座/头	压接线径	角度	Pitch
22216	6351P0210T	6351P Straight Header	2P	公座			180°	6.35mm
22217	6351P0310T	6351P Straight Header (6.35mm Pitch)	3P	公座			180°	6.35mm
22218	6351P0412T	6351P Straight Header (6.35mm Pitch)	4P	公座			180°	6.35mm
23367	6353TM12P	6353TM Terminal (Male)		公针		#14-18		

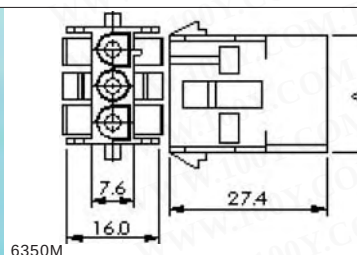

详细产品规格 - 请点击 cn.100y.com.tw

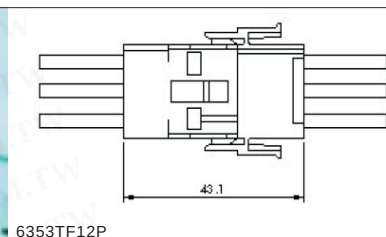


规格说明:
额定电流: 10A AC, DC (AWG 14)
最大电压值: 5000V AC/Minute
电阻阻力: 1000MΩ Min.
可适用PC 木板厚度: 1.6mm
额定电压: 600V AC, DC
接触电阻: 10mΩ Max.
操作温度: -55°C to +105°C

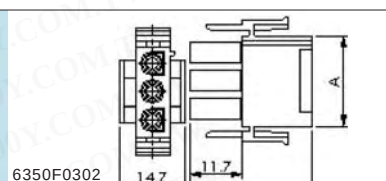

规格说明:
额定电流: 10A AC, DC (AWG 14)
最大电压值: 5000V AC/Minute
电阻阻力: 1000MΩ Min.
可适用PC 木板厚度: 1.6mm
额定电压: 600V AC, DC
接触电阻: 10mΩ Max.
操作温度: -55°C to +105°C


100Y 编号	厂商编号	说明	Packing	Pins	公/母	座/头	压接线径	角度°	Pitch
23464	6350F0202	6350F Housing		2P	公头			180°	6.35mm
23366	6350F0302	6350F Housing		3P	公头			180°	6.35mm
23465	6350F0402	6350F Housing		3P	公头			180°	6.35mm
23458	6350M0202	6350M Housing		2P	母头			180°	6.35mm
23459	6350M0302	6350M Housing		3P	母头			180°	6.35mm
23460	6350M0402	6350M Housing		4P	母头			180°	6.35mm
23463	6353TF12P	6353TM Terminal (Female)	4,000/R		母针		#14-18		

机板用电源公座, 母头和端子

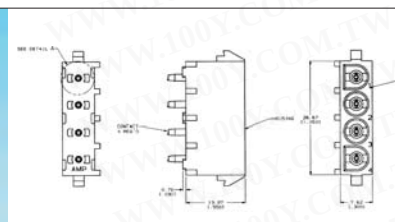

AMP

特征:
 <CompactPCI: 否
 <中心线, Matrix (mm [in]): 6.35 [0.250]
 <接触布局: 并排
 <安装: PCB插板式
 <主体材料: 尼龙
 <锁住类型: 正面锁
 <接触类型: 针
 <最大电流: 否
 <接触材料: 黄磷青铜
 <PCB极性: 无极性
 <PCB 厚度(mm [in]): 1.57 [0.062]
 <额定电流(安培.): 19

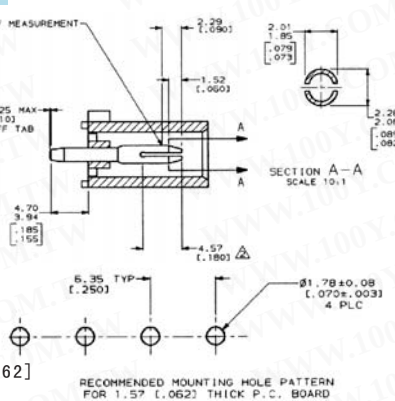

100Y 编号	厂商编号	制造厂商	说明	Pins	公/母	座/头	角度°
12308	0-350430-1	AMP	TEMP:105? MAX /600V MAX	4P	Male		180°
40117	350428-1	AMP	Soft ShellPin and Socket Connectors		Pre-tin		

详细产品规格 - 请点击 cn.100y.com.tw





详细产品规格 - 请点击 cn.100y.com.tw

夹端子工具和退端子工具



AWG:24-30, 18-22

100Y 编号	厂商编号	说明	压接线径
9827	K-06	PCB 连接头端子钳	AWG24-30,18-22

2004-8

说明:
功率: 100V AC Max or 12VDC 2A Max
绝缘电阻: 100MΩ (min) at 500V DC
介质耐电压: 500VAC, 60Hz for 1 Minute
接触电阻: 30m max at AC100mA(max) 1 KHz
Insertion & extraction force
Initial: 4.5kg max
Extraction force: 0.9 to 3.0kgs

Material
Insulator: Thermoplastic PBT
Contact: phosphor bronze
Metal shell: copper alloy




100Y 编号	厂商编号	说明	插脚	类型	材质	颜色
5306	2004-8	DIN 母座焊线式有耳 8P	8P	Female	镀锡	黑色

DIN_Style 连接头 DIN 公/母头焊线式

1101-8
1101-5

2002-8

Rating: 100V AC Max or
12VDC 2A Max
Insulation resistance: Min at 250V DC
Dielectric strength: 250V AC/1 Minute




100Y 编号	厂商编号	说明	M/F Plug	Poles	材质	颜色
3845	1101-5	DIN 公插头	Male	5P	镀锡	黑色
32129	1101-8	DIN 公插头	Male	8P	镀锡	黑色
5309	2002-8	DIN 延长母头 8P	Female	8P	PVC	黑色

DIN 母座




2003-5

说明:
功率: 100V AC Max or 12VDC 2A Max
绝缘电阻: 100MΩ (min) at 500V DC
介质耐电压: 500VAC, 60Hz for 1 Minute
接触电阻: 30m max at AC100mA(max) 1 KHz



2004-5

说明:
功率: 100V AC Max or 12VDC 2A Max
绝缘电阻: 100MΩ (min) at 500V DC
介质耐电压: 500VAC, 60Hz for 1 Minute
接触电阻: 30m max at AC100mA(max) 1 KHz
Insertion & extraction force
Initial: 4.5kg max
Extraction force: 0.9 to 3.0kgs




Material
Insulator: Thermoplastic PBT
Black UL94V-0
Contact: phosphor bronze
Metal shell: copper alloy

100Y 编号	厂商编号	说明	插脚	类型	材质	颜色
10272	2003-5	DIN 母头插板式 5P	5P	Female	--	黑色
3891	2004-5	DIN 母座焊线式有耳	5P	Female	镀锡	黑色


详细产品规格 - 请点击 cn.100y.com.tw

Mini-DIN 连接头/座 Mini-DIN 插板式母座

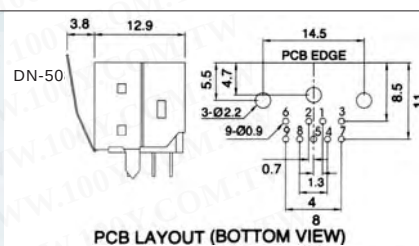


DN-508BS-9

Material
Housing: PBT UL94V-0
Terminal: Copper alloy (Gold/Tin plated gold: 1~3u")
Shell: Copper Alloy
Spring shield: stainless
The outer shield was plated by hanging method

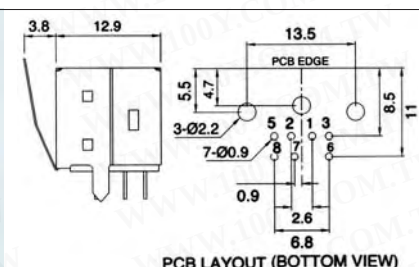

Material
Housing: PBT UL94V-0
Terminal: Copper alloy (Gold/Tin plated gold: 1~3u")
Shell: Copper Alloy
Spring shield: stainless
The outer shield was plated by hanging method

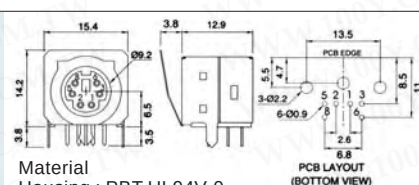

DN-508BS-6

Material
Housing: PBT UL94V-0
Terminal: Copper alloy
(Gold/Tin plated gold: 1~3u")
Shell: Copper Alloy
Spring shield: stainless
The outer shield was plated by hanging method

100Y 编号	厂商编号	说明	插脚	颜色
12657	DN-508BS-6	Mini-DIN 插板式母座	6P	黑
12658	DN-508BS-7	Mini-DIN 插板式母座	7P	黑
12659	DN-508BS-9	Mini-DIN 插板式母座	9P	黑




服务专线: 台湾: 886-3-5753170
传 真: 台湾: 886-3-5753172
E-mail: sale@100y.com.tw


深圳: 86-755-83298787
深圳: 86-755-83640655
深圳: 100y@163.com

上海: 86-21-34970699
上海: 86-21-64605107
上海: 100y-1@163.com


10-26

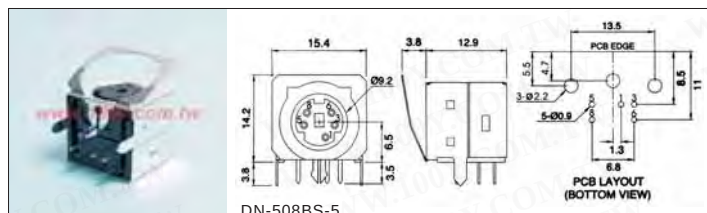


Material
Housing : PBT UL94V-0
Terminal : Copper alloy(Gold/Tin plated gold:1~3u")
Shell : Copper Alloy
Spring shield : stainless
The outer shield was plated by hanging method

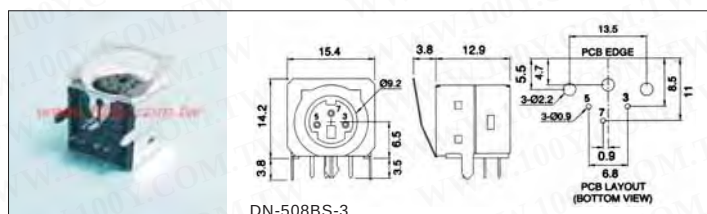


Material
Housing : PBT UL94V-0
Terminal : Copper alloy(Gold/Tin plated gold:1~3u")
Shell : Copper Alloy
Spring shield : stainless
The outer shield was plated by hanging method

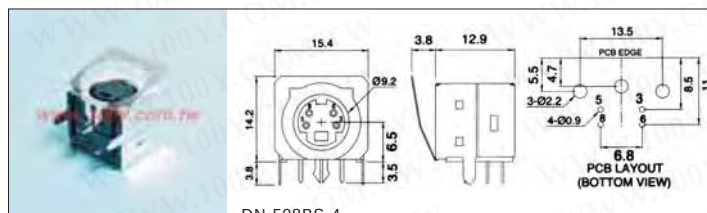

Material
Housing : PBT UL94V-0
Terminal : Copper alloy(Gold/Tin plated gold:1~3u")
Shell : Copper Alloy
Spring shield : stainless
The outer shield was plated by hanging method

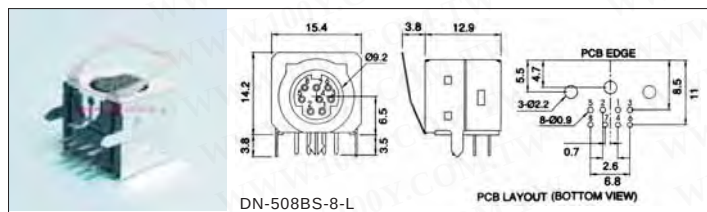


Material
Housing : PBT UL94V-0
Terminal : Copper alloy(Gold/Tin plated gold:1~3u")
Shell : Copper Alloy
Spring shield : stainless
The outer shield was plated by hanging method

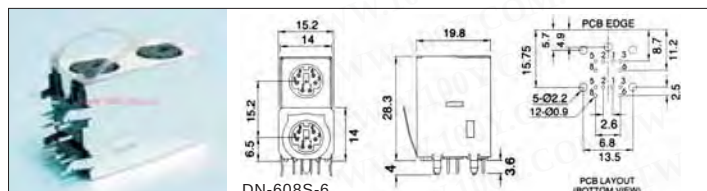

Material
Housing : PBT UL94V-0
Terminal : Copper alloy(Gold/Tin plated gold:1~3u")
Shell : Copper Alloy
Spring shield : stainless
The outer shield was plated by hanging method

100Y 编号	厂商编号	说明	插脚	颜色
12655	DN-508BS-3	Mini-DIN 插板式母座	3P	黑
12220	DN-508BS-4	Mini-DIN 插板式母座	4p	黑
12656	DN-508BS-5	Mini-DIN 插板式母座	5p	黑
10271	DN-508BS-8-L	Mini-DIN 插板式母座	8P	黑
10177	DN-608S-6	Mini DIN 插板式双头母座	6p	


详细产品规格 - 请点击 cn.100y.com.tw

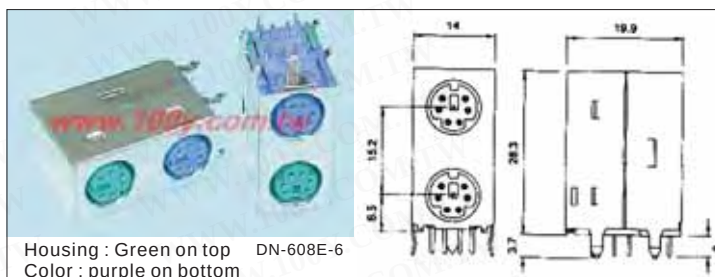

Housing : Green on top
Color : purple on bottom

100Y 编号	厂商编号	说明	Pins	颜色
18922	DN-508BS-6B	Mini-DIN 插板式母座	6P	Green
18921	DN-508BS-6C	Mini-DIN 插板式母座	6P	Purple
18924	DN-608E-6	Shielded Double mini-DIN 插板式母座	2*6P	Green on Top Purple on Bottom

Mini-DIN 有耳面板用焊线式母座

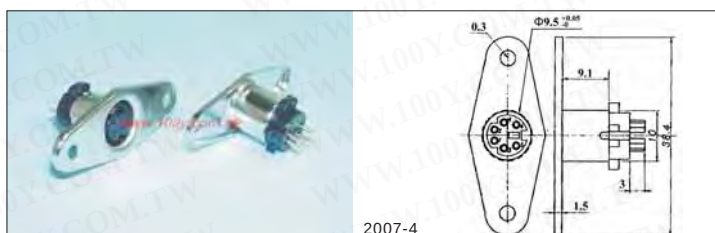


100Y 编号	厂商编号	说明	Pins
3846	2007-4	Mini DIN 有耳母座	4P

Mini-DIN 空中焊线式连接头



MAATERIAL: PBT (UL94V-O)
DESCRIPTION: 7PIN DIN PLUG
M/F: MALE

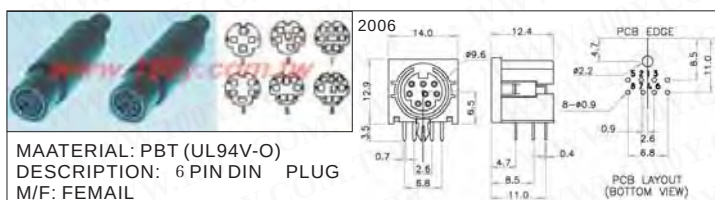

MAATERIAL: PBT (UL94V-O)
DESCRIPTION: 6 PIN DIN PLUG
M/F: FEMALE

100Y 编号	厂商编号	说明	Pins	公/母 头
17983	1102-3	Mini-DIN 空中焊线式连接头	3P	公插头
17576	1102-4	Mini-DIN 空中焊线式连接头	4P	公插头
17984	1102-5	Mini-DIN 空中焊线式连接头	5P	公插头
17985	1102-6	Mini-DIN 空中焊线式连接头	6P	公插头
17986	1102-7	Mini-DIN 空中焊线式连接头	7P	公插头
12527	1102-8	Mini-DIN 空中焊线式连接头	8P	公插头
17982	1102-9	Mini-DIN 空中焊线式连接头	9P	公插头
30858	2006-5P	Mini-DIN 空中焊线式连接头	5P	母头
15477	2006-6	Mini-DIN 空中焊线式连接头	6P	母头
12475	2006-8	Mini-DIN 空中焊线式连接头	8P	母头

详细产品规格 - 请点击 cn.100y.com.tw





MIL-C-5015 圆形军规连接头

Ms3101 系列铝合金连接头和附件(防水型)

详细产品规格 - 请点击 cn.100y.com.tw



100Y 编号	厂商编号	说明	尺寸 (mm)	插脚	M/F Plug Socket	Rate Current/Voltage
28958	MS3101A-20-16P	9P 公插座 21A 500Vac	32.13	9P	公座	13A~20A 500Vac

MS3102 系列铝合金连接头和附件(防水型)



MS3102A-20-15P



MS3102A-32-17P



MS3102A-14S-9S



MS3102A-28-21P




MS3102A-20-4S



MS3057-4A




MS3102A-22-22S



MS3057-XXA 尺寸规格表

型号 MIL	适用规格	外径 B	内径 C	长度 E	外径 F	全长 G	H	牙制
MS3057-4A	10SL,12S,12	7.9	5.6	8	21.4	20.5	60	5/8-24UNEF
MS3057-6A	12SL,14S,14	11.1	7.9	8	25.4	22.2	55	3/4-20UNEF
MS3057-8A	16S,16	14.3	11.1	8	28.5	23.8	49	7/8-20UNEF
MS3057-10A	18	15.9	14.3	8	30.9	23.8	46	1-20UNEF
MS3057-12A	20,22	19	15.9	8	35.7	23.8	43	1 3/16-18UNEF
MS3057-16A	24,28	23.8	15.9	8	42.2	26.1	38	1 7/16-18UNEF
MS3057-20A	32	31.7	19	9.9	52.2	28.1	34	1 3/4-18UNS
MS3057-24A	36	34.9	23.8	11.2	57.1	29.7	31	2-18UNS



100Y 编号	厂商编号	说明	外形尺寸 (mm)	插脚	M/F Plug Socket	Rate Current/Voltage
22953	MS3057-4A	电缆夹	10SL-12-12S			
22949	MS3102A-10SL-3P	3P 公插座 13A~20A 500Vac	18.2	3P	公头	13A~20A/500Vac/700Vdc
31619	MS3102A-10SL-3S	3P 母头 13A~20A 500Vac	18.2	3P	母头	13A~20A/500Vac/700Vdc
29217	MS3102A-14S-2P	4P 公插座 13A~20A 200Va	23	4P	公头	13A~20A/200Vac/250Vdc
31617	MS3102A-14S-2S	4P 母头 13A~20A 200Vac	23	4P	母头	13A~20A/200Vac/250Vdc
27783	MS3102A-14S-5P	5P 公插座 13A~20 200Va	23	5P	公头	13A~20A/200Vac/250Vdc
33261	MS3102A-14S-5S	5P 母头 13A~20A 200Vac	23	5P	母头	13A~20A/200Vac/250Vdc
29835	MS3102A-14S-6P	6P 公插座 13A~20A 200Va	23	6P	公头	13A~20A/200Vac/250Vdc
31615	MS3102A-14S-6S	6P 母头 13A~20A 200Vac	23	6P	母头	13A~20A/200Vac/250Vdc
27781	MS3102A-14S-7P	3P 公插座 13A~20A 500Va	23	3P	公头	13A~20A/500Vac/700Vdc
33887	MS3102A-14S-7S	3P 母头 13A~20A 200Vac	23	3P	母头	13A~20A/200Vac/250Vdc
27782	MS3102A-14S-9P	2P 公插座 13A~20A 500Va	23	2P	公头	13A~20A/500Vac/700Vdc
33888	MS3102A-14S-9S	2P 母头 13A~20A 200Vac	23	2P	母头	13A~20A/200Vac/250Vdc
35792	MS3102A-16-10P	3P 公插座 23A~35A 500Vac	24.6	3P	公头	23A~35A/500Vac/700Vdc
39412	MS3102A-18-10S	17P 母头 13A~20A 500Vac	29.4	17P	母头	13A~20A/500Vac/700Vdc
22942	MS3102A-18-1P	10P 公插座 13A~20A 500Vac	27	10P	公头	13A~20A/500Vac/700Vdc
31618	MS3102A-18-1S	10P 母头 13A~20A 200Vac (B,C,F,G=500Vac)	27	10P	母头	13A~20A/200Vac/250Vdc
38773	MS3102A-20-15P	7P 公插座 23A~35A 500Vac	29.4	7P	公头	23A~35A/500Vac/700Vdc
28462	MS3102A-20-16P	9P 公插座	29.4	9P	公头	13A~20A/23A~35A/500Vac/700Vdc
33891	MS3102A-20-16S	9P 母头 21A 500Vac	29.4	9P	公头	13A~20A/23A~35A/500Vac/700Vdc
22964	MS3102A-20-29P	17P 公插座 21A 500Vac	29.4	17P	公头	13A~20A/500Vac/700Vdc
31614	MS3102A-20-29S	17P 母头 13A~20A 500Vac	29.4	17P	母头	13A~20A/500Vac/700Vdc
31613	MS3102A-20-4S	37P 母头 23A~35A 900Vac	29.4	4P	母头	23A~35A/900Vac/1250Vdc
31940	MS3102A-22-22P	4P 公插座 46A~60A 500Vac	31.8	4P	公头	46A~60A/500Vac/700Vdc
31942	MS3102A-22-22S	4P 母头 13A~20A 500Vac	31.8	4P	母头	46A~60A/500Vac/700Vdc
30874	MS3102A-28-21P	37P 公插座 13A~20A 500Vac	39.7	37P	公头	13A~20A/500Vac/700Vdc
39198	MS3102A-28-21S	37P 母头 13A~20A 500Vac	39.7	37P	母头	13A~20A/500Vac/700Vdc
40425	MS3102A-32-17P	37P 公插座 80A~110A 900Vac	44.5	4P	公头	80A~110A/900Vac/1250Vdc
40426	MS3102A-32-17S	4P 母头 80A~110A 900Vac	44.5	4P	母头	80A~110A/900Vac/1250Vdc

MS3106 系列铝合金连接头和附件(防水型)

详细产品规格 - 请点击 cn.100y.com.tw




MS3106A-16-10P



MS3106A-16-10S

Insulation resistance :
Morethen 5000MΩ
Internal voltage :
AC 2000V with stand 1min

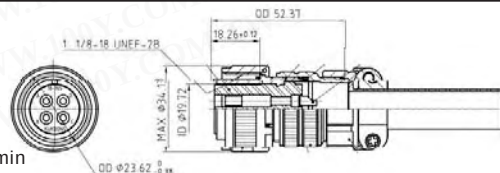




MS3106B-18-1S



MS3106A-14S-9S


Insulation resistance :
Morethen 5000M Ω
Internal voltage :
AC 2000V with stand 1min

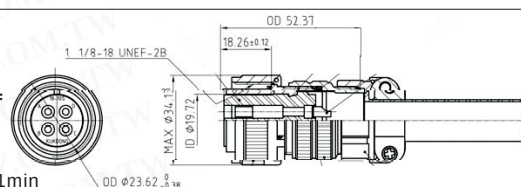


MS3057-6A



MS3106A-14A-2P



MS3106A-14A-2P




MS3057-6A

MS3057-6A 尺寸规格表

型号 MIL	适用规格	外径 B	内径 C	长度 E	外径 F	全长 G	H	牙制
MS3057-6A	12SL,14S,14	11.1	7.9	8	25.4	22.2	55	3/4-20UNEF

100Y 编号	厂商编号	说明	Shell Size (mm)	Pins	M/F Plug Socket	Rate Current/Voltage
22963	MS3057-12A	电缆夹	20-22		17P	公头
30876	MS3057-16A	电缆夹	24-28			
29214	MS3057-6A	电缆夹	14-14S			
33897	MS3106A-10SL-3P	3P 公插座 13A~20A 500Vac	39.7	3P	公头	13A~20A/500Vac/700Vdc
24415	MS3106A-10SL-3S	3P 母头 13A~20A 500Vac	23	3P	母头	13A~20A/500Vac/700Vdc
33898	MS3106A-14A-2P	4P 公插头	28	4P	公插头	13A~20A/200Vac/250Vdc
29215	MS3106A-14S-2S	4P 母头 13A~20A 200Vac	28	4P	母头	13A~20A/200Vac/250Vdc
32186	MS3106A-14S-5P	5P 公插座 20A 200Vac	28	5P	公头	13A~20A/200Vac/250Vdc
28686	MS3106A-14S-5S	5P 母头 13A~20A 200Vac	28	5P	母头	13A~20A/200Vac/250Vdc
33886	MS3106A-14S-6P	6P 公插座	28	6P	公插座	13A~20A/200Vac/250Vdc
29839	MS3106A-14S-6S	6P 母头	28	6P	母头	13A~20A/200Vac/250Vdc
33884	MS3106A-14S-7P	3P 公插座	28	3P	公头	13A~20A/500Vac/700Vdc
33885	MS3106A-14S-7S	3P 母头	28	3P	母头	13A~20A/500Vac/700Vdc
33900	MS3106A-14S-9P	2P 公插座 13A~20A 500Va	23	2P	公头	13A~20A/500Vac/700Vdc
33901	MS3106A-14S-9S	2P 母头 13A~20A 200Vac	23	2P	母头	13A~20A/200Vac/250Vdc
35537	MS3106A-16-10P	3P 公插座 23A~35A 500Vac	31.5	3P	公插座	46A~60A/500Vac/700Vdc
35914	MS3106A-16-10S	3P 母头 23A~35A 500Vac	31.5	3P	母头	23A~35A/500Vac/700Vdc
37289	MS3106A-16S-1S	7P 母头 13A~20A 500Vac	31.5	7P	母头	13A~20A/500Vac/700Vdc
33939	MS3106A-18-1P	10P 公插头	34.1	10P	公插头	13A~20A/200Vac (B,C,F,G=500Vac)
31944	MS3106A-18-1S	10P 母头 13A~20A 200Vac (B,C,F,G=500Vac)	34.1	10P	母头	13A~20A/200Vac (B,C,F,G=500Vac)
33892	MS3106A-20-16P	9P 公插座 20A 500Vac	37.3	9P	公头	13A~20A/23A~35A/500Vac/700Vdc
28487	MS3106A-20-16S	9P 母头 13A~20A 500Vac	37.3	9P	母头	13A~20A/500Vac/700Vdc
22960	MS3106A-20-29P	17P 公插座 20A 500Vac	37.3	17P	公头	13A~20A/500Vac/700Vdc
28685	MS3106A-20-29S	17P 母头 13A~20A 500Vac	37.3	17P	母头	13A~20A/500Vac/700Vdc
33894	MS3106A-22-22P	4P 公插座 46A~60A 500Vac	40.3	4P	公插座	46A~60A/500Vac/700Vdc
32810	MS3106A-22-22S	4P 母头 46A~60A 500Vac	40.3	4P	母头	46A~60A/500Vac/700Vdc
39197	MS3106A-28-21P	37P 公插座 13A~20A 500Vac	49.4	37P	公插座	13A~20A/500Vac/700Vdc
30875	MS3106A-28-21S	37P 母头 13A~20A 500Vac	49.4	37P	母头	13A~20A/500Vac/700Vdc
38775	MS3106B-18-1S	10P 母头 13A~20A 200Vac (B,C,F,G=500Vac)	34.1	10P	母头	13A~20A/200Vac (B,C,F,G=500Vac)
37925	MS3106B-20-15S	7P 母头 23A~35A 500Vac	37.3	7P	母头	23A~35A/500Vac


MS3108 系列铝合金连接头和附件(防水型)

详细产品规格 - 请点击 cn.100y.com.tw

MS3108A-18-1S



MS3057-10A



MS3057-10A 尺寸规格表

型号 MIL	适用规格	外径 B	内径 C	长度 E	外径 F	全长 G	H	牙制
MS3057-10A	18	15.9	14.3	8	30.9	23.8	46	1-20UNEF

100Y 编号	厂商编号	说明	尺寸 (mm)	插脚	M/F Plug Socket	Rate Current/Voltage
22957	MS3057-10A	电缆夹	18			
22954	MS3108A-18-1S	10P 弯管母头 13A~20A 500Vac	34.1	10P	母头	20A/500Vac/700Vdc



服务专线: 台湾: 886-3-5753170
传 真: 台湾: 886-3-5753172
E-mail: 台湾: sale@100y.com.tw

深圳: 86-755-83298787
深圳: 86-755-83640655
深圳: 100y@163.com

上海: 86-21-34970699
上海: 86-21-64605107
上海: 100y-1@163.com





10-29



圆形工业连接头/座



PLT-16系列金属连接头和附件

详细产品规格 - 请点击 cn.100y.com.tw

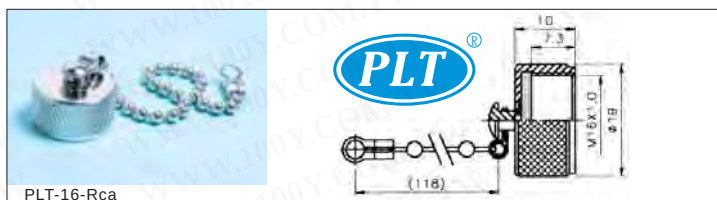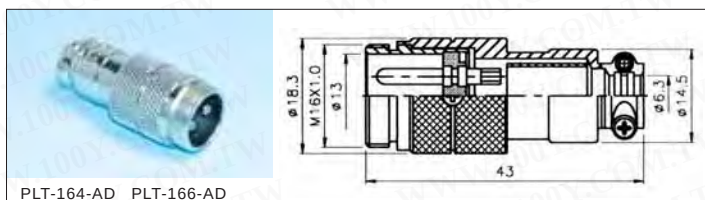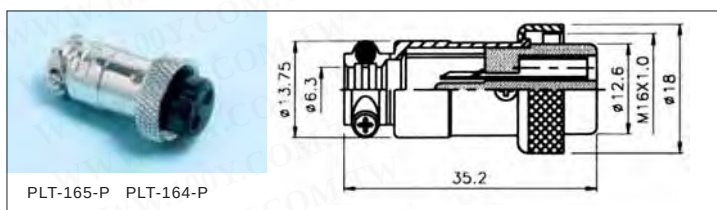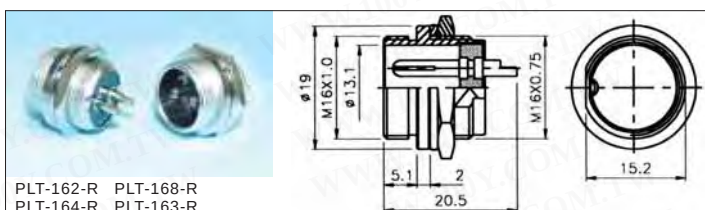

No. of contacts	2	3	4	5	6	7	8
Contacts Configuration							
Rated current/voltage	5A 125V	5A 125V	5A 125V	5A 125V	5A 125V	5A 125V	5A 125V
Operation limit voltage (AC. V. rms)	200	200	200	200	200	200	200
Withstanding voltage (AC. V rms) 1 minute	1000	1000	1000	1000	1000	1000	1000
Insulation resistance (MΩ MIN.) at DC 500V	1000	1000	1000	1000	1000	1000	1000
Contact resistance (MΩ MAX.) at DC 1A	3	3	3	3	3	3	3
Pin diameter (Φ mm)	1.4	1.4	1.4	1.2	0.8	0.8	0.8

100Y 编号	厂商编号	制造厂商	说明	Shell Size	Pins	M/F Plug/Socket	Rate Current/Voltage
6235	PLT-16-Rca	PLT	PLT-16 连接头防尘盖	16mm			
6186	PLT-163-P	PLT	PLT-16 Series -Industrial Circular Connectors	16mm	3P	Female Plug	5A/125V
6185	PLT-163-R	PLT	PLT-16 Series -Industrial Circular Connectors	16mm	3P	Male Socket	5A/125V
6248	PLT-165-AD	PLT	PLT-16 Series -Industrial Circular Connectors	16mm	5P	Male Plug	5A/125V



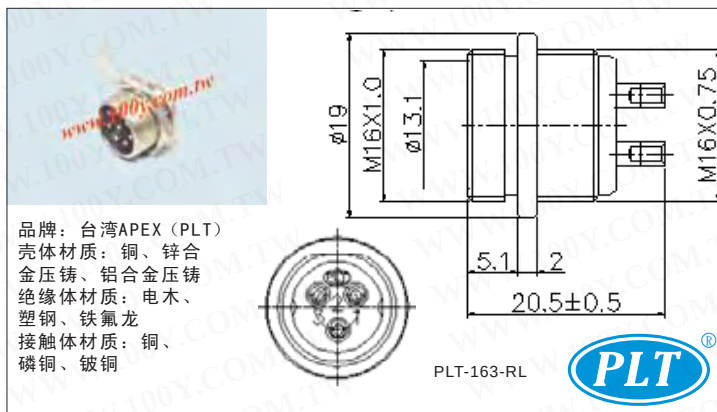
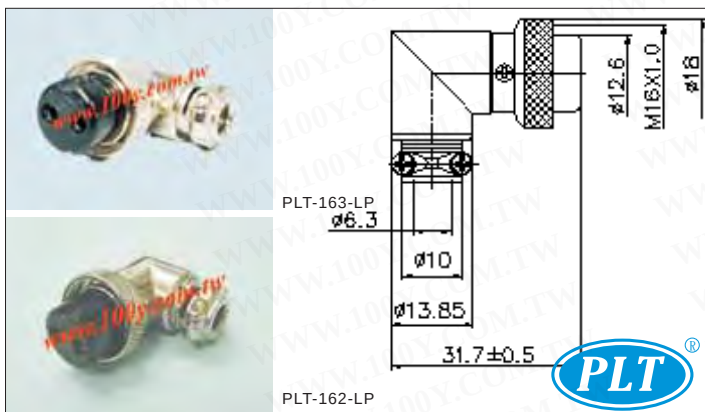


100Y 编号	厂商编号	制造厂商	说明	Shell Size	Pins	M/F Plug/Socket	Rate Current/Voltage
6180	PLT-162-AD	PLT	PLT-16 Series -Industrial Circular Connectors	16mm	2P	Male Plug	5A/125V
39025	PLT-162-LP	PLT	PLT-16 Series -Industrial Circular Connectors	16mm	2P	Female Plug 90°	5A/125V
5196	PLT-162-P	PLT	PLT-16 Series -Industrial Circular Connectors	16mm	2P	Female Plug	5A/125V
3186	PLT-162-R	PLT	PLK-16 Series -Industrial Circular Connectors	16mm	2P	Male Socket	5A/125V
4827	PLT-163-AD	PLT	PLT-16 Series -Industrial Circular Connectors	16mm	3P	Male Plug	5A/125V
39472	PLT-163-LP	PLT	PLT-16 Series -Industrial Circular Connectors	18mm	3P	Female Plug	5A/125V
39474	PLT-163-RL	PLT	PLT-16 Series -Industrial Circular Connectors	16mm	8P	Female Plug	5A/125V
6274	PLT-164-AD	PLT	PLT-16 Series -Industrial Circular Connectors	16mm	4P	Male Plug	5A/125V
7002	PLT-164-P	PLT	PLT-16 Series -Industrial Circular Connectors	16mm	4P	Female Plug	5A/125V
4822	PLT-164-R	PLT	PLT-16 Series -Industrial Circular Connectors	16mm	4P	Male Socket	5A/125V
6256	PLT-165-P	PLT	PLT-16 Series -Industrial Circular Connectors	16mm	5P	Female Plug	5A/125V
10124	PLT-165-R	PLT	PLT-16 Series -Industrial Circular Connectors	16mm	5	Male Socket	125V
6258	PLT-166-AD	PLT	PLT-16 Series -Industrial Circular Connectors	16mm	6P	Male Plug	5A/125V
4833	PLT-166-P	PLT	PLT-16 Series -Industrial Circular Connectors	16mm	6P	Female Plug	5A/125V
6142	PLT-166-R	PLT	PLT-16 Series -Industrial Circular Connectors	16mm	6P	公座	5A/125V
6282	PLT-167-AD	PLT	PLT-16 Series -Industrial Circular Connectors	16mm	7P	Male Plug	5A/125V
5319	PLT-167-P	PLT	PLT-16 Series -Industrial Circular Connectors	16mm	7P	Female Plug	5A/125V
5320	PLT-167-R	PLT	PLT-16 Series -Industrial Circular Connectors	16mm	7P	Male Socket	5A/125V
6285	PLT-168-AD	PLT	PLT-16 Series -Industrial Circular Connectors	16mm	8P	Male Plug	5A/125V
3189	PLT-168-P	PLT	PLK-16 Series -Industrial Circular Connectors	16mm	8P	Female Plug	5A/125V
3195	PLT-168-R	PLT	PLT-16 Series -Industrial Circular Connectors	16mm	8P	Male Socket	5A/125V



PLT-19系列金属连接头和附件





详细产品规格 - 请点击 cn.100y.com.tw

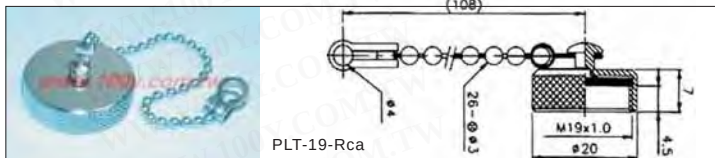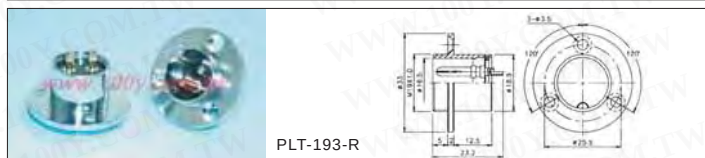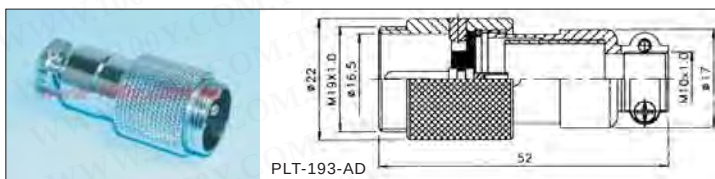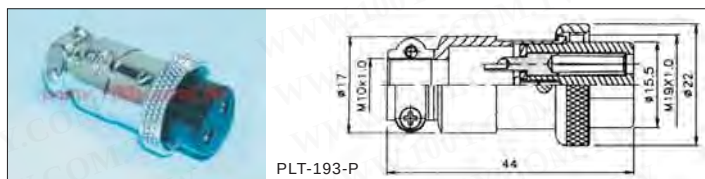

No. of contacts	2	3	4
Contacts Configuration			
Rated current/voltage	7A 250V	7A 250V	7A 250V
Operation limit voltage (AC, V. rms)	250	250	250
Withstanding voltage (AC, V rms) 1 minute	1000	1000	1000
Insulation resistance (MΩMIN.) at DC 500V	1000	1000	1000
Contact resistance (MΩMAX.) at DC 1A	3	3	3
Pin diameter (φmm)	1.7	1.7	1.7

100Y 编号	厂商编号	制造厂商	说明	插脚	M/F Plug/Socket	尺寸	Rate Current/Voltage
19630	PLT-19-Rca	PLT	PLT-19 连接头防尘盖			19mm	
6298	PLT-192-AD	PLT	PLT-19 Series -Industrial Circular Connectors	2P	Male Plug	19mm	7A/250V
6301	PLT-192-P	PLT	PLT-19 Series -Industrial Circular Connectors	2P	Female Plug	19mm	7A/250V
6300	PLT-192-R	PLT	PLT-19 Series -Industrial Circular Connectors	2P	Male Socket	19mm	7A/250V
6302	PLT-193-AD	PLT	PLT-19 Series -Industrial Circular Connectors	3P	Male Plug	19mm	7A/250V
6307	PLT-193-P	PLT	PLT-19 Series -Industrial Circular Connectors	3P	Female Plug	19mm	7A/250V
6306	PLT-193-R	PLT	PLT-19 Series -Industrial Circular Connectors	3P	Male Socket	19mm	7A/250V
6305	PLT-194-AD	PLT	PLT-19 Series -Industrial Circular Connectors	4P	Male Plug	19mm	7A/250V
6297	PLT-194-P	PLT	PLT-19 Series -Industrial Circular Connectors	4P	Female Plug	19mm	7A/250V
6294	PLT-194-R	PLT	PLT-19 Series -Industrial Circular Connectors	4P	Male Socket	19mm	7A/250V

PLT-25系列金属连接头和附件

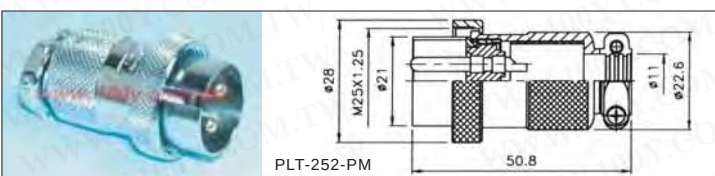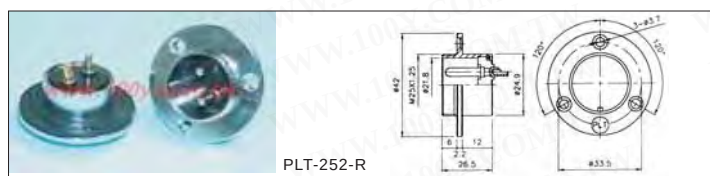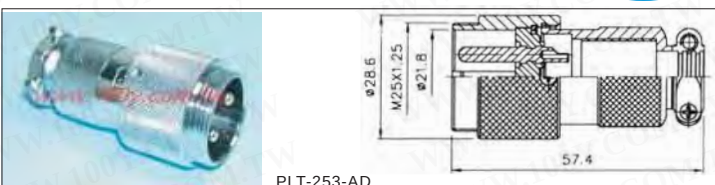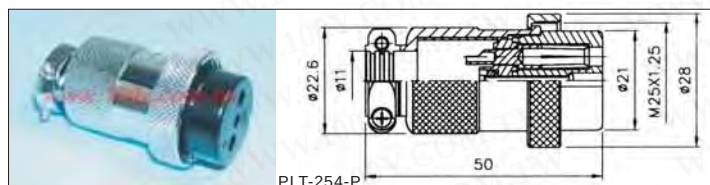


No. of contacts	2	3	4	5	6
Contacts Configuration					
Rated current/voltage	10A 250V	10A 250V	10A 250V	10A 250V	10A 250V
Operation limit voltage(AC. V. rms)	400	400	400	400	300
Withstanding voltage(AC. V rms) 1 minute	2000	2000	2000	1800	1800
Insulation resistance (M MIN.) at DC 500V	2000	2000	2000	2000	2000
Contact resistance (M MAX.) at DC 1A	3	3	3	3	3
Pin diameter(mm)	1.9	1.9	1.9	1.9	1.9

100Y 编号	厂商编号	制造厂商	说明	M/F Plug/Socket	插脚	外形尺寸	Rate Current/Voltage
6237	PLT-252-AD	PLT	PLT-25 Series -Industrial Circular Connectors	Male Plug	2P	25mm	10A/250V
6178	PLT-252-P	PLT	PLT-25 Series -Industrial Circular Connectors	Female Plug	2P	25mm	10A/250V
6261	PLT-253-AD	PLT	PLT-25 Series -Industrial Circular Connectors	Male Plug	3P	25mm	10A/250V
6241	PLT-253-P	PLT	PLT-25 Series -Industrial Circular Connectors	Female Plug	3P	25mm	10A/250V
6243	PLT-254-AD	PLT	PLT-25 Series -Industrial Circular Connectors	Male Plug	4P	25mm	10A/250V
6249	PLT-254-P	PLT	PLT-25 Series -Industrial Circular Connectors	Female Plug	4P	25mm	10A/250V






PLT-254-RF



PLT-25-Rca




100Y 编号	厂商编号	制造厂商	说明	M/F Plug/Socket	Pins	Shell Size	Rate Current/Voltage
6232	PLT-25-Rca	PLT	PLT-25 连接头防尘盖			25mm	
6177	PLT-252-PM	PLT	PLT-25 Series -Industrial Circular Connectors	公头	2P	25mm	10A/250V
6284	PLT-252-R	PLT	PLT-25 Series -Industrial Circular Connectors	Male Socket	2P	25mm	10A/250V
6238	PLT-252-RF	PLT	PLT-25 Series -Industrial Circular Connectors	Female Socket	2P	25mm	10A/250V
6283	PLT-253-R	PLT	PLT-25 Series -Industrial Circular Connectors	Male Socket	3P	25mm	10A/250V
9915	PLT-254-PM	PLT	PLT-25 Series -Industrial Circular Connectors	Male Plug	4P	25mm	10A/250V
6245	PLT-254-R	PLT	PLT-25 Series -Industrial Circular Connectors	Male Socket	4P	25mm	10A/250V
10617	PLT-254-RF	PLT	4P 母插座 10A/250V	Female Socket	4P	25mm	10A/250V


PLT-30系列金属连接头和附件

详细产品规格 - 请点击 cn.100y.com.tw


PLT-303-P

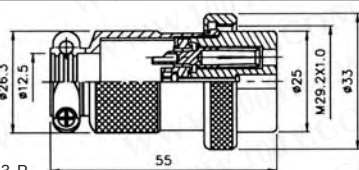


PLT-307-RF




PLT-304-AD

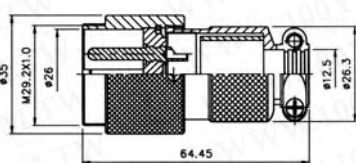


PLT-307-PM

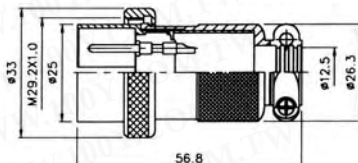

PLT-304-R



PLT-30-Rca



X30J32A+32J

品牌: 台湾APEX (PLT)
壳体材质: 铜、锌合金压铸、铝合金压铸
绝缘体材质: 电木、塑钢、铁氟龙
接触体材质: 铜、磷铜、铍铜

No. of contacts	2	3	4	5	7	8
接触点分布						
额定电流 / 电压	15A 250V	15A 250V	15A 250V	15A 250V	15A 250V	15A 250V
最大电压值 (AC. V. rms)	400	400	400	400	400	300
额定电压 (AC. V rms) / 每针	2000	2000	2000	1800	1800	1800
绝缘电阻 (MΩ MIN.) at DC 500V	2000	2000	2000	2000	2000	2000
接触电阻 (MΩ AX.) at DC 1A	3	3	3	3	3	3
针 直径 (φ mm)	2.8	2.8	2.8	2.8	2	2.5

100Y 编号	厂商编号	制造厂商	说明	Shell Size	Pins	M/F Plug/Socket	Rate Current/Voltage
6230	PLT-30-Rca	PLT	PLT-30 连接头防尘盖	30mm			
4831	PLT-302-AD	PLT	PLT-30 Series -Industrial Circular Connectors	30mm	2P	Male Plug	15A/250V
7003	PLT-302-P	PLT	PLT-30 Series -Industrial Circular Connectors	30mm	2P	Female Plug	15A/250V
6239	PLT-302-R	PLT	PLT-30 Series -Industrial Circular Connectors	30mm	2P	Male Socket	15A/250V
6262	PLT-303-AD	PLT	PLT-30 Series -Industrial Circular Connectors	30mm	3P	Male Plug	15A/250V
8590	PLT-303-P	PLT	PLT-30 Series -Industrial Circular Connectors	30mm	3P	Female Plug	15A/250V
4826	PLT-303-R	PLT	PLT-30 Series -Industrial Circular Connectors	30mm	3P	公插座	15A/250V
9946	PLT-304-AD	PLT	PLT-30 Series -Industrial Circular Connectors	30mm	4P	Male Plug	15A/250V
7004	PLT-304-P	PLT	PLT-30 Series -Industrial Circular Connectors	30mm	4P	Female Plug	15A/250V
6267	PLT-304-PM	PLT	PLT-30 Series -Industrial Circular Connectors	30mm	4P	Male Plug	15A/250V
6263	PLT-304-R	PLT	PLT-30 Series -Industrial Circular Connectors	30mm	4P	Male Socket	15A/250V
6268	PLT-304-RF	PLT	PLT-30 Series -Industrial Circular Connectors	30mm	4P	Female Socket	15A/250V
4834	PLT-305-AD	PLT	PLT-30 Series -Industrial Circular Connectors	30mm	5P	Male Plug	15A/250V
6279	PLT-305-P	PLT	PLT-30 Series -Industrial Circular Connectors	30mm	5P	Female Plug	15A/250V
5118	PLT-305-R	PLT	PLT-30 Series -Industrial Circular Connectors	30mm	5P	Male Socket	15A/250V
6278	PLT-307-PM	PLT	PLT-30 Series -Industrial Circular Connectors	30mm	7P	Male Plug	15A/250V
6291	PLT-307-RF	PLT	PLT-30 Series -Industrial Circular Connectors	30mm	7P	Female Socket	15A/250V
37806	X30J32A+32J		方形金属连接器 32P	1	32		3A/500VAC



服务专线: 台湾: 886-3-5753170
传 真: 台湾: 886-3-5753172
E-mail: 台湾: sale@100y.com.tw



深圳: 86-755-83298787
深圳: 86-755-83640655
深圳: 100y@163.com

上海: 86-21-34970699
上海: 86-21-64605107
上海: 100y-1@163.com

PLT-32系列金属连接头和附件



详细产品规格 - 请点击 cn.100y.com.tw

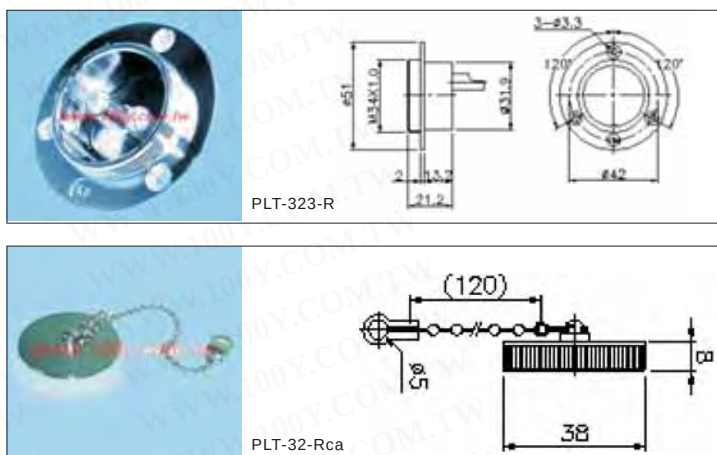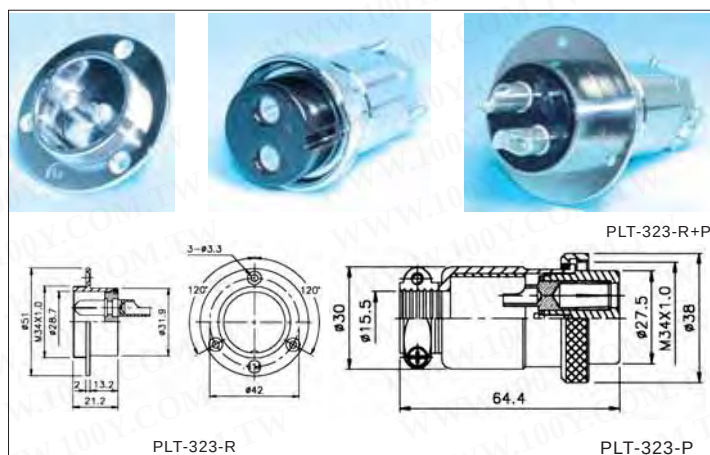



No. of contacts	2	3
Contacts Configuration		
Rated current/voltage	30A 250V	30A 250V
Operation limit voltage(AC. V. rms)	400	400
Withstanding voltage(AC. V rms) 1 minute	2000	2000
Insulation resistance (MΩ MIN.) at DC 500V	2000	2000
Contact resistance (MΩ MAX.) at DC 1A	5	5
Pin diameter(φmm)	6	6

100Y 编号	厂商编号	制造厂商	说明	外形尺寸	插脚	M/F Plug/Socket	Rate Current/Voltage
19792	PLT-32-Rca	PLT	PLT-32 连接头防尘盖	32			
15475	PLT-322-R+P	PLT	PLT-32 Series -Industrial Circular Connectors	32mm	2P	公座+母插头	30A/250V
27774	PLT-323-R		PLT-32 Series -Industrial Circular Connectors	32mm	3P	公座	30A/250V
19629	PLT-323-R+P	PLT	PLT-32 Series -Industrial Circular Connectors	32mm	3P	公座+母插头	30A/250V

PLS-20系列金属连接头和附件







详细产品规格-请点击cn.100y.com.tw

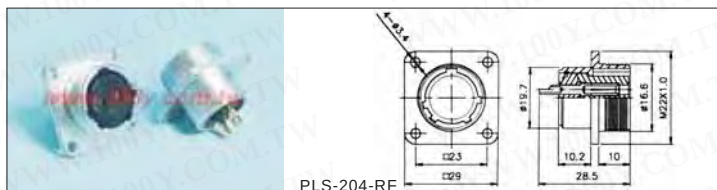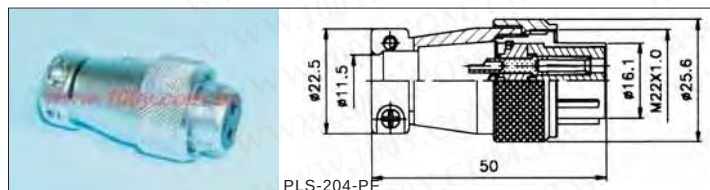

No. of contacts	2	3	4	7
Contacts Configuration				
Rated current/voltage	15A 250V	15A 250V	10A 250V	10A 250V
Operation limit voltage(AC. V. rms)	250	250	250	250
Withstanding voltage(AC. V rms) 1 minute	1500	1500	1500	1000
Insulation resistance(MΩ MIN.) at DC 500V	2000	2000	2000	2000
Contact resistance (MΩ MAX.) at DC 1A	3	3	3	3
Pin diameter(φmm)	1.8	1.8	1.6	1.6

100Y 编号	厂商编号	制造厂商	说明	M/F Plug/Socket	外观大小	插脚	Rate Current/Voltage
6179	PLS-202-PF	PLT	PLS-20 Series -Industrial Circular Connectors	Female Plug	20mm	2P	15A/250V
6152	PLS-202-RF	PLT	PLS-20 Series -Industrial Circular Connectors	母座	20mm	2P	15A/250V
5119	PLS-203-PF	PLT	PLS-20 Series -Industrial Circular Connectors	母头	20mm	3P	15A/250V
6183	PLS-203-RF	PLT	PLS-20 Series -Industrial Circular Connectors	母座	20mm	3P	15A/250V
6247	PLS-204-PF	PLT	PLS-20 Series -Industrial Circular Connectors	母头	20mm	4P	10A/250V
6244	PLS-204-RF	PLT	PLS-20 Series -Industrial Circular Connectors	母座	20mm	4P	10A/250V
3188	PLS-207-PF	PLT	PLK-16 Series -Industrial Circular Connectors	母头	20mm	7P	10A/250V
4835	PLS-207-RF	PLT	PLS-20 Series -Industrial Circular Connectors	母座	20mm	7P	10A/250V







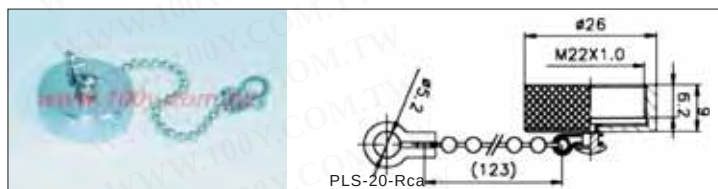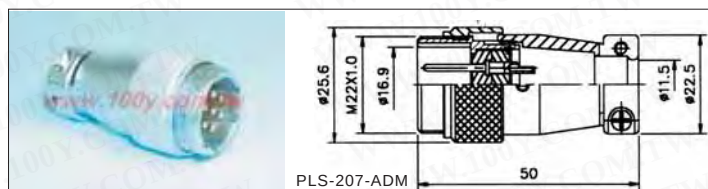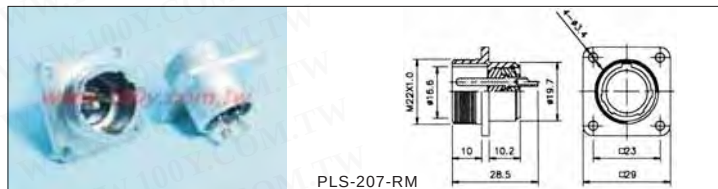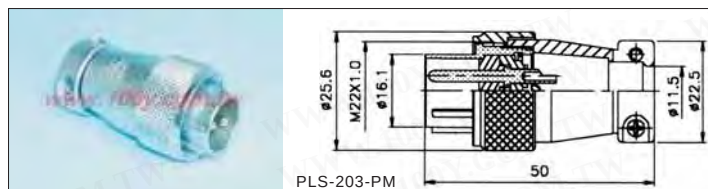

No. of contacts	2	3	4	7
Contacts Configuration				
Rated current/voltage	15A 250V	15A 250V	10A 250V	10A 250V
Operation limit voltage(AC. V. rms)	250	250	250	250
Withstanding voltage(AC. V rms) 1 minute	1500	1500	1500	1000
Insulation resistance (MΩ MIN.) at DC 500V	2000	2000	2000	2000
Contact resistance (MΩ MAX.) at DC 1A	3	3	3	3
Pin diameter(Φmm)	1.8	1.8	1.6	1.6

100Y 编号	厂商编号	制造厂商	说明	M/F Plug/Socket	外观大小	插脚	Rate Current/Voltage
6234	PLS-20-Rca	PLT	PLS-20 连接头防尘盖		20mm		
6175	PLS-202-PM	PLT	PLS-20 Series -Industrial Circular Connectors	公头	20mm	2P	10A/250V
6151	PLS-202-RM	PLT	PLS-20 Series -Industrial Circular Connectors	公座	20mm	2P	10A/250V
10121	PLS-203-PM	PLT	PLS-20 Series -Industrial Circular Connectors	公插头	20mm	3P	10A/250V
6182	PLS-203-RM	PLT	PLS-20 Series -Industrial Circular Connectors	公座	20	3P	15A/250V
6272	PLS-204-PM	PLT	PLS-20 Series -Industrial Circular Connectors	公头	20mm	4P	10A/250V
2663	PLS-204-RM	PLT	PLS-20 Series -Industrial Circular Connectors	公座	20mm	4P	10A/250V
14426	PLS-207-ADM	PLT	PLS-20 Series -Industrial Circular Connectors	公头	20mm	7P	8A/250V
4825	PLS-207-PM	PLT	PLS-20 Series -Industrial Circular Connectors	公头	20mm	7P	8A/250V
6273	PLS-207-RM	PLT	PLS-20 Series -Industrial Circular Connectors	公座	20mm	7P	8A

PLS-24系列金属连接头和附件

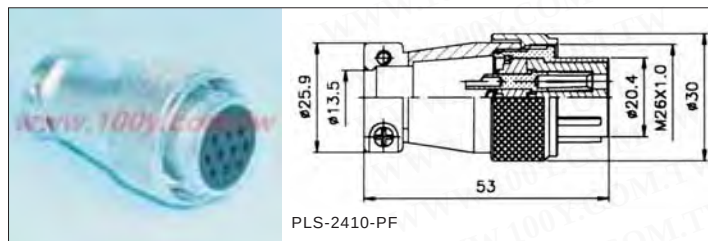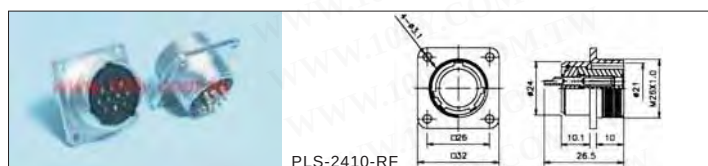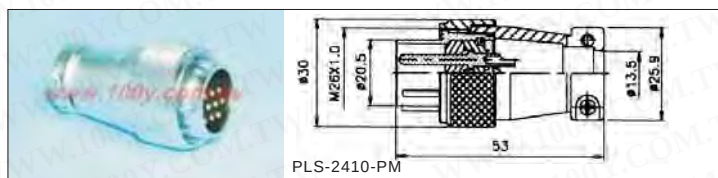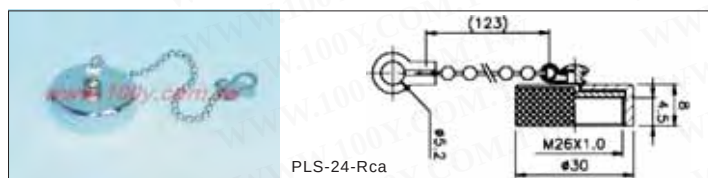详细产品规格 - 请点击 cn.100y.com.tw


No. of contacts	10
接触点分布	
额定电流 / 电压	10A 250V
最大电压值(AC. V. rms)	250
额定电压(AC. V rms) / 每针	1000
绝缘电阻 (MΩ MIN.) at DC 500V	2000
接触电阻 (MΩ MAX.) at DC 1A	3
针直径(Φmm)	1.6

100Y 编号	厂商编号	制造厂商	说明	M/F Plug/Socket	插脚	外形尺寸	Rate Current/Voltage
6233	PLS-24-Rca	PLT	PLS-24 连接头防尘盖			24mm	
6174	PLS-2410-PF	PLT	PLS-24 Series -Industrial Circular Connectors	Female Plug	10P	24mm	10A/250V
10123	PLS-2410-PM	PLT	PLS-24 Series -Industrial Circular Connectors	Male Plug	10	24mm	10A/ 250V
10122	PLS-2410-RF	PLT	PLS-24 Series -Industrial Circular Connectors	Female Socket	10	24mm	10A/ 250V
6173	PLS-2410-RM	PLT	PLS-24 Series -Industrial Circular Connectors	Male Socket	10P	24mm	10A/250V







PLS-28系列金属连接头和附件

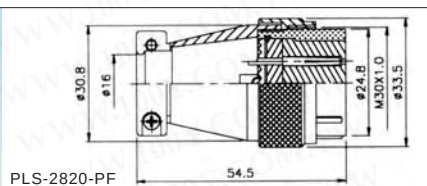详细产品规格 - 请点击 cn.100y.com.tw


PLS-2820-PF

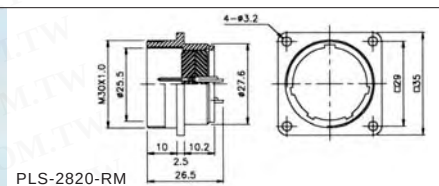


PLS-2820-RM

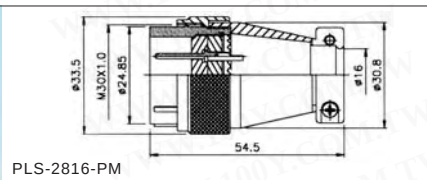


PLS-2816-PM

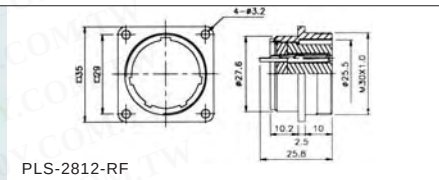


PLS-2812-RF

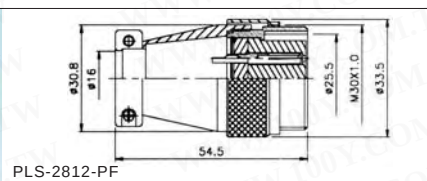

PLS-2812-PF

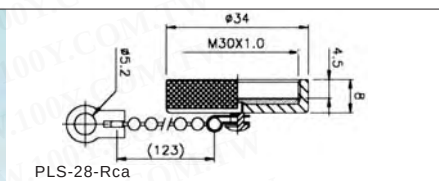

PLS-28-Rca

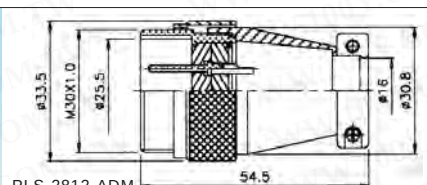

PLS-2812-ADM



No. of contacts	7	12	16	17	20	26
Contacts Configuration						
Rated current/voltage	15A 250V	10A 250V	5A 250V	5A 250V	5A 250V	5A 250V
Operation limit voltage (AC.V.rms)	300	250	250	250	250	250
Withstanding voltage (AC.V.rms) 1 minute	1800	1000	1000	1000	1000	1000
Insulation resistance (MΩ MIN.) at DC 500V	1800	1000	1000	1000	1000	1000
Contact resistance (MΩ MAX.) AT DC 1A	3	5	5	5	3	3
Solder inter diameter	2	1.6	1.6	1.6	1.2	1.2

100Y 编号	厂商编号	制造厂商	说明	M/F Plug/Socket	Rate Current/Voltage	插脚	外形尺寸
6231	PLS-28-Rca	PLT	PLS-28 连接头防尘盖				28mm
6269	PLS-2812-ADF	PLT	PLS-28 Series -Industrial Circular Connectors	Female Plug	10A/250V	12P	28mm
6246	PLS-2812-ADM	PLT	PLS-28 Series -Industrial Circular Connectors	Male Plug	10A/250V	12P	28mm
4829	PLS-2812-PF	PLT	PLS-28 Series -Industrial Circular Connectors	母头	10A/250V	12P	28mm
6259	PLS-2812-PM	PLT	PLS-28 Series -Industrial Circular Connectors	Male Plug	10A/250V	12P	28mm
4830	PLS-2812-RF	PLT	PLS-28 Series -Industrial Circular Connectors	Female Socket	10A/250V	12P	28mm
4836	PLS-2812-RM	PLT	PLS-28 Series -Industrial Circular Connectors	Male Socket	10A/250V	12P	28mm
6143	PLS-2816-ADF	PLT	PLS-28 Series -Industrial Circular Connectors	母连接头	5A/250V	16P	28mm
6275	PLS-2816-ADM	PLT	PLS-28 Series -Industrial Circular Connectors	Male Plug	5A/250V	16P	28mm
6289	PLS-2816-PF	PLT	PLS-28 Series -Industrial Circular Connectors	母头	5A/250V	16P	28mm
3190	PLS-2816-PM	PLT	PLK-16 Series -Industrial Circular Connectors	公头	5A/250V	16P	28mm
6287	PLS-2816-RF	PLT	PLS-28 Series -Industrial Circular Connectors	Female Socket	5A/250V	16P	28mm
6277	PLS-2816-RM	PLT	PLS-28 Series -Industrial Circular Connectors	Male Socket	5A/250V	16P	28mm
6299	PLS-2820-ADF	PLT	PLS-28 Series -Industrial Circular Connectors	Female Plug	5A/250V	20P	28mm
6292	PLS-2820-ADM	PLT	PLS-28 Series -Industrial Circular Connectors	Male Plug	5A/250V	20P	28mm
4832	PLS-2820-PF	PLT	PLS-28 Series -Industrial Circular Connectors	母头	5A/250V	20P	28mm
6304	PLS-2820-PM	PLT	PLS-28 Series -Industrial Circular Connectors	Male Plug	5A/250V	20P	28mm
6293	PLS-2820-RF	PLT	PLS-28 Series -Industrial Circular Connectors	Female Socket	5A/250V	20P	28mm
3193	PLS-2820-RM	PLT	PLK-16 Series -Industrial Circular Connectors	公座	5A/250V	20P	28mm
6189	PLS-2826-ADF	PLT	PLS-28 Series -Industrial Circular Connectors	母头	5A/250V	26P	28mm
6188	PLS-2826-ADM	PLT	PLS-28 Series -Industrial Circular Connectors	Male Plug	5A/250V	26P	28mm
6154	PLS-2826-PF	PLT	PLS-28 Series -Industrial Circular Connectors	母头	5A/250V	29P	28mm
6153	PLS-2826-PM	PLT	PLS-28 Series -Industrial Circular Connectors	Male Plug	5A/250V	26P	28mm
10033	PLS-2826-RF	PLT	PLS-28 Series -Industrial Circular Connectors	Female Socket	5A/250V	26P	28mm
6236	PLS-2826-RM	PLT	PLS-28 Series -Industrial Circular Connectors	Male Socket	5A/250V	26P	28mm



服务专线: 台湾: 886-3-5753170

传 真: 台湾: 886-3-5753172

E-mail: sale@100y.com.tw

深圳: 86-755-83298787

深圳: 86-755-83640655

深圳: 100y@163.com

上海: 86-21-34970699


上海: 86-21-64605107

上海: 100y-1@163.com


10-35



PLS-35系列金属连接头和附件

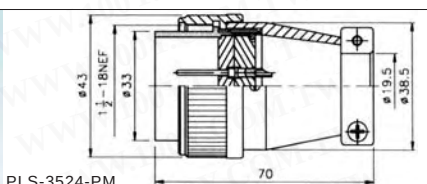详细产品规格 - 请点击 cn.100y.com.tw

PLS-3524-PM

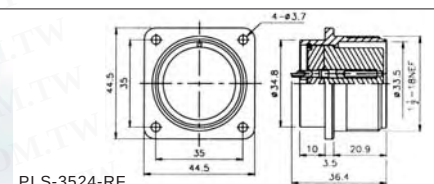


PLS-3524-RF

No. of contacts	24
Contacts Configuration	
Rated current/voltage	8A 250V
Operation limit voltage(AC. V. rms)	200
Withstanding voltage(AC. V rms) 1 minute	1000
Insulation resistance (MΩ MIN.) at DC 500V	1000
Contact resistance (MΩ MAX.) at DC 1A	3
Pin diameter(Φ mm)	1.8


欢迎上网
Download
最新产品电子目录
CN. 100Y. COM. TW

100Y 编号	厂商编号	制造厂商	说明	外形尺寸	插脚	M/F Plug/Socket	Rate Current/Voltage
6172	PLS-3524-PM	PLT	PLS-35 Series -Industrial Circular Connectors	35mm	24P	Male Plug	8A/250V
8591	PLS-3524-RF	PLT	PLS-35 Series -Industrial Circular Connectors	35mm	24P	Female Plug	8A/250V

PLK-16系列金属连接头和附件

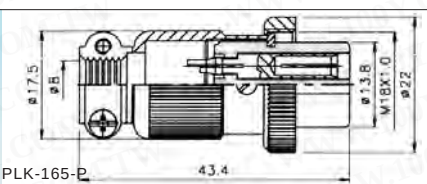

PLK-165-P

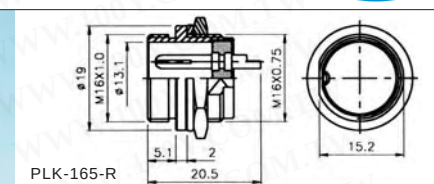


PLK-165-R


No. of contacts	2	3	4	5
Contacts Configuration				
Rated current/voltage	5A 125V	5A 125V	5A 125V	5A 125V
Operation limit voltage(AC. V. rms)	200	200	200	200
Withstanding voltage(AC. V rms) 1 minute	1000	1000	1000	1000
Insulation resistance (MΩ MIN.) at DC 500V	1000	1000	1000	1000
Contact resistance (MΩ MAX.) at DC 1A	3	3	3	3
Pin diameter(Φ mm)	1.5	1.5	1.5	1.5

100Y 编号	厂商编号	制造厂商	说明	外形尺寸	插脚	M/F Plug/Socket	Rate Current/Voltage
3187	PLK-162-P	PLT	PLK-16 Series -Industrial Circular Connectors	16mm	2P	Female Plug	5A/125V
3194	PLK-162-R	PLT	PLK-16 Series -Industrial Circular Connectors	16mm	2P	Male Socket	5A/125V
4828	PLK-163-P	PLT	PLK-16 Series -Industrial Circular Connectors	16mm	3P	Female Plug	5A/125V
6242	PLK-163-R	PLT	PLK-16 Series -Industrial Circular Connectors	16mm	3P	Male Socket	5A/125V
6270	PLK-164-P	PLT	PLS-20 Series -Industrial Circular Connectors	16mm	4P	母头	5A/125V
3191	PLK-164-R	PLT	PLK-16 Series -Industrial Circular Connectors	16mm	4P	Male Socket	5A/125V
7981	PLK-165-P	PLT	PLK-16 Series -Industrial Circular Connectors	16mm	5P	Female Plug	5A/125V
12239	PLK-165-R	PLT	PLK-16 Series -Industrial Circular Connectors	16	5P	Male Socket	5A/125V

PLK-30系列金属连接头和附件

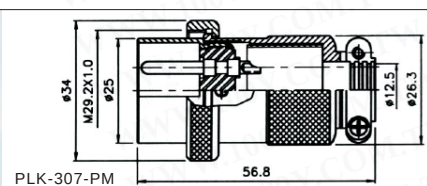

PLK-307-PM

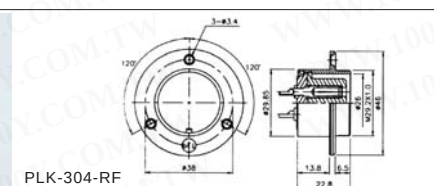



PLK-304-RF

100Y 编号	厂商编号	制造厂商	说明	插脚	M/F Plug/Socket	Rate Current/Voltage	外观大小
28464	PLK-304-PM	PLT	PLK-30 Series -Industrial Circular Connectors	4P	公插座	15A / 250V	30
28465	PLK-304-RF	PLT	PLK-30Series -Industrial Circular Connectors	4P	母插头	15A / 250V	30
28829	PLK-307-FR	PLT	PLK-30Series -Industrial Circular Connectors	7P	母插头	15A / 250V	30
28830	PLK-307-PM	PLT	PLK-30 Series -Industrial Circular Connectors	7P	公插座	15A / 250V	30



Xs8系列镀镍金属连接器

详细产品规格 - 请点击 cn.100y.com.tw

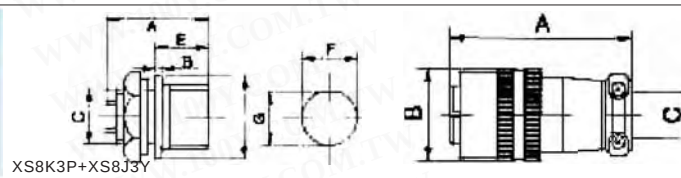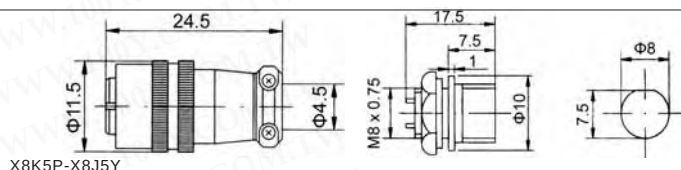

X系列连接器型号代码解释

X	12	J	3	P	BP	67
---	----	---	---	---	----	----

连接器型号

外壳安装孔径—
16mm、12mm、8mm

接触对种类——
J-插针, K-插孔

接触对数量: —
2、3、4、5、7、9

插头和插座种类:

- P-电缆 固定式插头
- T-橡胶护套式插头
- C-电缆密封式插头
- A-方形插座
- Y-圆形插座

产品介绍:

X型高可靠圆形小型连接器采用螺纹式连接。适用于各类仪器、仪表或电子设备等线路的连接。其最小外壳直径只有8mm。


技术数据:

- 额定电流: 1A($\phi 0.8\text{mm}$), 3A($\phi 1\text{mm}$), 10A($\phi 1.5\text{mm}$), 13A($\phi 1.6\text{mm}$)
 - 额定电压: 250V(X8 36V)
 - 接触电阻: $\phi 0.8$ 、 $\phi 1\text{mm}$ 接触对不大于 0.01Ω , $\phi 1.5$ 、 $\phi 1.6\text{mm}$ 接触对不大于 0.0025Ω
 - 绝缘电阻: $>5000\text{M}\Omega$
 - 耐压: 2、3、4蕊为1500V, 5、6、7蕊为1000V(50~60Hz有效值)
 - 机械寿命: 500次
 - 环境温度: $-55^{\circ}\text{C}\sim+85^{\circ}\text{C}$
 - 相对温度: 温度为 40°C 时可达93%
 - 振动: 振频为50~500Hz, 加速度达 100m/s^2
 - 冲击: 振率为40~80次/mm, 加速度达 250m/s^2
 - 离心: 加速度达 250m/s^2
- 



100Y 编号	厂商编号	说明	外观大小	插脚	M/F Plug/Socket	Rate Current/Voltage
15208	X8K5P-X8J5Y	X8 Series -镀镍圆形连接器	8mm	5P	F 插头+M 圆插座	1A/36V
16487	XS8K2P+XS8J2Y	X8 Series -镀镍圆形连接器	φ8mm	2P	F 插头+M 圆插座	1A/36V
16421	XS8K3P+XS8J3Y	X8 Series -镀镍圆形连接器	8mm	3P	F 插头+M 圆插座	1A/36V
16488	XS8K4P+XS8J4Y	X8 Series -镀镍圆形连接器	∅0.8	4P	F 插头+M 圆插座	1A/36V



Xs9系列镀镍金属连接器

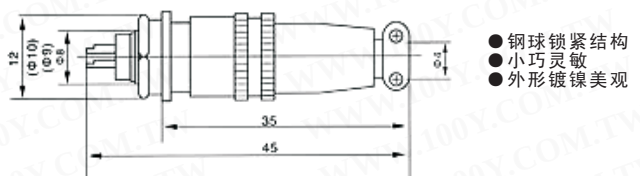

100Y 编号	厂商编号	说明	插脚	M/F Plug/Socket	外形尺寸
25980	XS9K5P+XS9J5Y	XS9 Series -镀镍圆形连接器	5P	M Plug + F Socket	φ9mm

Xs10系列镀镍金属连接器

详细产品规格 - 请点击 cn.100y.com.tw

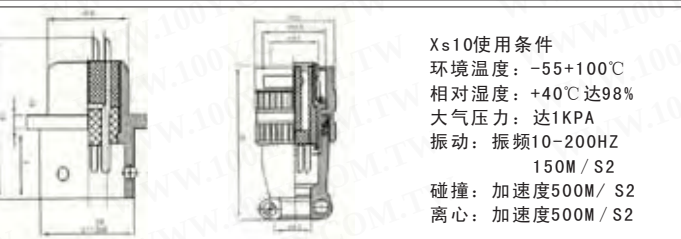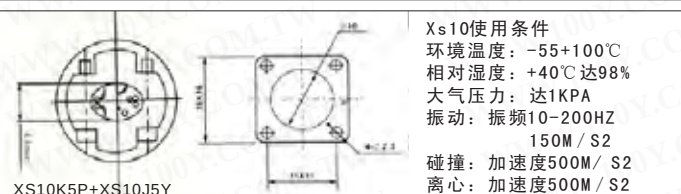

100Y 编号	厂商编号	说明	插脚	公头/母头(座)	外形尺寸
29238	XS10K3P+XS10J3Y	镀镍金属圆形公座+母头连接器	3P	圆形公座+母头	10mm
29213	XS10K4P+XS10J4Y	镀镍金属圆形公座+母头连接器	4P	圆形公座/母头	10mm
29216	XS10K5P+XS10J5Y	镀镍金属圆形公座+母头连接器	5P	圆形公座+母头	10mm





Xs12系列镀镍金属连接器

详细产品规格 - 请点击 cn.100y.com.tw

XS12K6P+XS12J6A



XS12K5P+XS12J5Y



XS12K5P+XS12J5Y



XS12K2P+XS12J2Y



XS12K4P+XS12J4A



XS12K3P+XS12J3A



XS12K5P+XS12J5A



XS12K2P+XS12J2A



XS12K3P+XS12J3Y



XS12K4P+XS12J4Y

XS12系列推拉式连接器具有连接快,重量轻、体积小等特点。外壳有铝合金和黄铜镀镍两种。主要用于无线电、仪器仪表、电子设备等直流或交流电路中的电路连接。

使用环境条件:

环境温度: $-55^{\circ}\text{C} \sim +85^{\circ}\text{C}$

相对湿度: 湿度 $+40^{\circ}\text{C}$, 达93%

大气压: 4kPa

正弦振动: 频率 $10 \sim 500\text{Hz}$, 加速度 100m/S^2

碰撞: 加速度 250m/S^2

主要技术特性:

额定电流: 3A

接触电阻: $\leq 5\text{m}\Omega$

绝缘电阻: $\geq 5000\text{m}\Omega$

额定电压: 500V



耐压: 1200V

寿命: 500次

XS12K(J)-AY插座:

外形示意图:





XS12J(K)-P插头

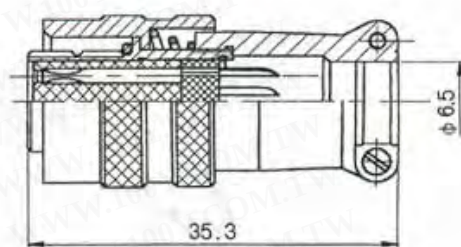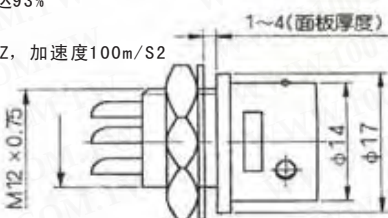

安装开口尺寸:

XS12K(J)-A插座:

安装开口尺寸:

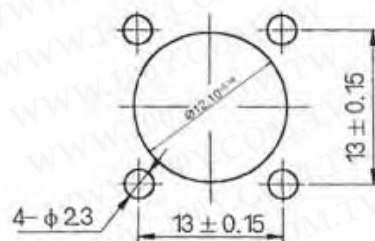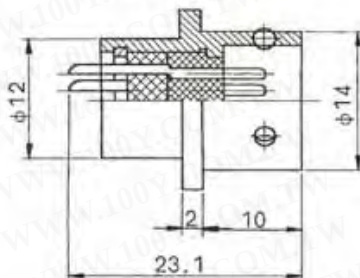

100Y 编号	厂商编号	说明	外形尺寸	插脚	M/F Plug/Socket	Rate Current/Voltage
26670	XS12K2P+XS12J2A	X12 Series - 镀镍圆形插头+方插座连接器	12mm	2P	F 插头+M 方形插座	3A/250V
27066	XS12K2P+XS12J2Y	X12 Series - 镀镍圆形插头+圆插座连接器	12mm	2P	F 插头+M 圆形插座	3A/250V
27062	XS12K3P+XS12J3A	X12 Series - 镀镍圆形插头+方插座连接器	12mm	3P	F 插头+M 方形插座	3A/250V
25684	XS12K3P+XS12J3Y	X12 Series - 镀镍圆形插头+圆插座连接器	12mm	3P	F 插头+M 圆形插座	3A/250V
27063	XS12K4P+XS12J4A	X12 Series - 镀镍圆形插头+方插座连接器	12mm	4P	F 插头+M 方形插座	3A/250V
25503	XS12K4P+XS12J4Y	X12 Series - 镀镍圆形插头+圆插座连接器	12mm	4P	F 插头+M 圆形插座	3A/250V
26685	XS12K5P+XS12J5A	X12 Series - 镀镍圆形插头+方插座连接器	12mm	5P	F 插头+M 方形插座	3A/250V
27067	XS12K5P+XS12J5Y	X12 Series - 镀镍圆形插头+圆插座连接器	12mm	5P	M 插头+F 圆形插座	3A/250V
33965	XS12K5P+XS12J5Y	X12 Series - 镀镍圆形插头+圆插座连接器	12mm	5P	F 插头+M 圆形插座	3A/250V
39393	XS12K6P+XS12J6A	X12 Series - 镀镍圆形插头+方插座连接器	12mm	6P	F 插头+M 方形插座	3A/250V

Xs16系列镀镍金属连接器

详细产品规格 - 请点击 cn.100y.com.tw

XS16K5P+XS16J5Y



XS16K7P+XS16J7Y



XS16K7P+XS16J7A



XS16K5P+XS16J5A



XS16K7P+XS16J7Y



服务专线: 台湾: 886-3-5753170

传 真: 台湾: 886-3-5753172

E-mail: 台湾: sale@100y.com.tw

深圳: 86-755-83298787

深圳: 86-755-83640655

深圳: 100y@163.com

上海: 86-21-34970699



上海: 86-21-64605107

上海: 100y-1@163.com

10-38



推拉式钢球锁紧结构, 插座外壳方形, 插拔迅速方便

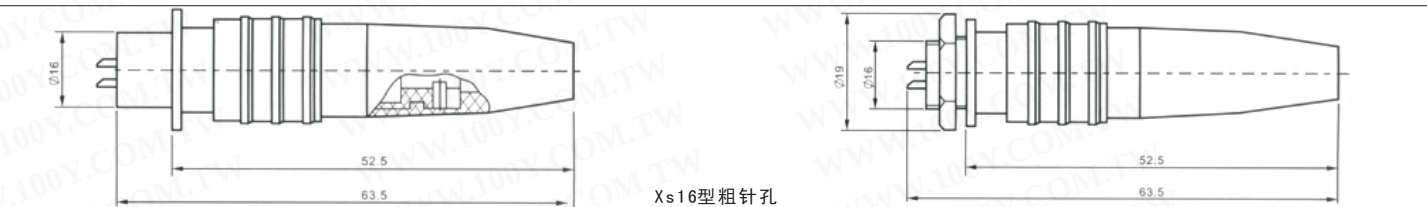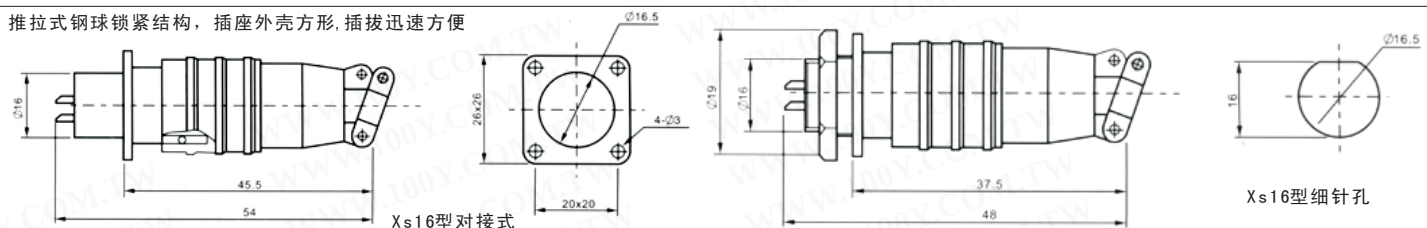


SHELL SIZE (外形尺寸)	16-2	16-3	16-4	16-5	16-7	16-9	
CONTACT ARRANGEMENTS (接触对分布)							
CURRENT RATING (额定电流)	3						
WITHSTAND VOLTAGE (额定电压)	AC 500V a minute						
INSULATION RESISTANCE (绝缘电阻)	>2000MΩ						
CONTACT RESISTANCE (接触电阻)	<5MΩ						

100Y 编号	厂商编号	说明	插脚	公头/母头(座)	Rate Current/Voltage	外形尺寸
36382	XS16K3P+XS16J3Y	镀铜金属母头+圆形公座连接器	3P	母头/圆形公座	3A/500V	16mm
36383	XS16K4P+XS16J4Y	镀铜金属母头+圆形公座连接器	4P	母头/圆形公座	3A/500V	16mm
29237	XS16K5P+XS16J5A	镀镍金属母头+方形公座连接器	5P	母头/方形公座	3A/500V	16mm
29218	XS16K5P+XS16J5Y	镀镍金属母头+圆形公座连接器	5P	母头/圆形公座	3A/500V	16mm
29236	XS16K7P+XS16J7A	镀镍金属母头+方形公座连接器	7P	母头/方形公座	3A/500V	16mm
29235	XS16K7P+XS16J7Y	镀镍金属母头+圆形公座连接器	7P	母头/圆形公座	3A/500V	16mm
36381	XS16K7P+XS16J7Y	镀铜金属母头+圆形公座连接器	7P	母头/圆形公座	3A/500V	16mm

Xs24系列镀镍金属连接器


详细产品规格 - 请点击 cn.100y.com.tw

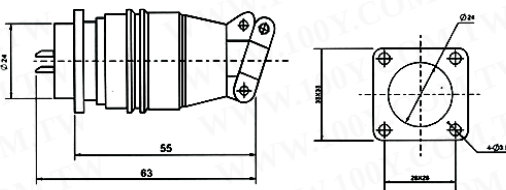

插头插座螺纹连接结构
用于电气及无线电设备
与电源间的连接

100Y 编号	厂商编号	说明	插脚	公头/母头(座)	Rate Current/Voltage	外形尺寸
29240	XS24K12P+XS24J12A	镀镍金属连接器	12P	公头/方形母座	5A/500V	1.5*12
29239	XS24K19P+XS24J19A	镀镍金属公头/方形母座连接器	19P	公头/方形母座	3A/500V	1*19

X12系列镀镍金属连接器

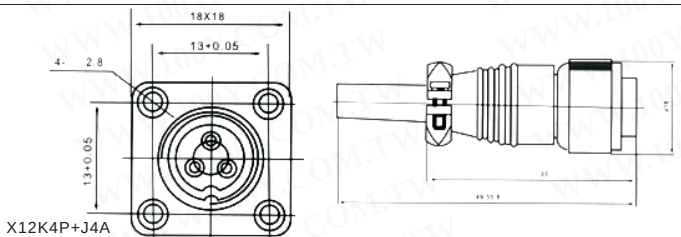

使用环境条件: 环境温度: -55+100℃ 相对湿度: 温度为+40℃时达到98%
主要技术条件: 工作电流/电压: 3A/300V 接触电阻: ≤10MΩ 耐压: 1000V


接触电阻: ≥5000MΩ 寿命: 500次

100Y 编号	厂商编号	说明	插脚	公/母 头/座	Rate Current/Voltage	外形尺寸
37768	X12K4P+J4A	方形金属连接器	4P	插脚	3A/500VAC	1
15214	X12K4P+X12J4A	镀镍圆形母插头+方形公插座连接器	4P	母插头+方形公插座	3A/300V	12mm
37761	X12K5P+J5A	方形金属连接器	5P		3A/500VAC	1





L2K4P+X12J4Y

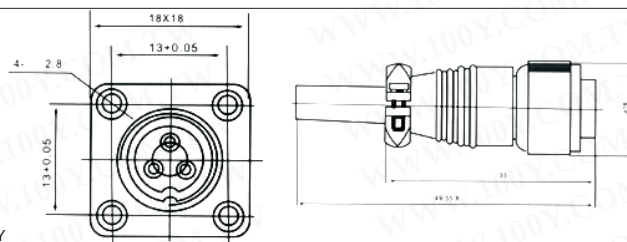


使用环境条件： 环境温度：-55~+100℃
 相对湿度：温度为+40℃时达到98%
 振动：10~2000HZ 冲击：490m/s
 主要技术条件：
 工作电流/电压：3A/300V
 接触电阻：≤10MΩ 耐压：1000V
 接触电阻：≥5000MΩ
 寿命：500次

100Y 编号	厂商编号	说明	插脚	公/母 头/座	Rate Current/Voltage	外形尺寸
37767	X12K3P+J3A	方形金属连接器	3P		3A/500VAC	1
15211	X12K3P+X12J3A	镀镍圆形母插头+方形公插座连接器	3P	母插头+方形公插座	3A/300V	12mm
15210	X12K3P+X12J3Y	镀镍金属母插头+圆形公插座连接器	3P	母插头+圆形公插座	3A/300V	12mm
29208	X12K4P+X12J4Y	镀镍金属母插头+圆形公插座连接器	4P	母插头+圆形公插座	3A/300V	12mm

X14系列镀镍金属连接器

详细产品规格—请点击cn.100y.com.tw

使用条件：
 环境温度：-55~+100℃；
 相对湿度：+40℃时达98%；
 大气压力：达1KPa
 温度为+40℃；
 振动：振频10~200Hz 加速度150m/s²；
 碰撞：加速度达500 m/s²；
 恒加速度：加速度达500 m/s²

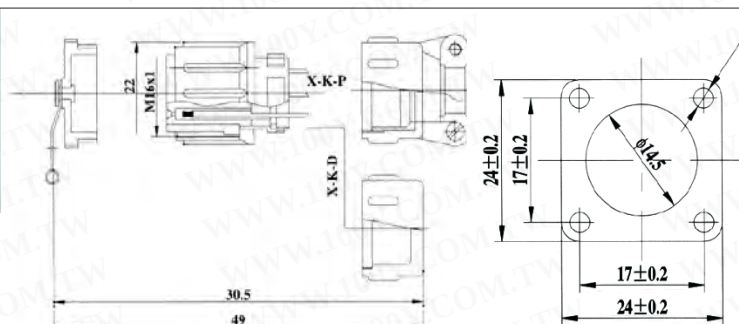

安装尺寸

主要技术条件：
 额定电流：接触对直径为1mm时，3A；
 接触对直径为2mm时，15A；
 接触对直径为3mm时，30A；
 额定电压：接触对中心距≥3.5mm，500V；
 接触对中心距≥2.8mm，400V；
 分离力和接触电阻：接触对直径为1mm时，
 0.8~3N、0.005Ω；接触对直径为2mm时，
 3~6N、0.0015Ω；
 接触对直径为3mm时，4~8N、0.00075Ω；
 抗电强度（50 Hz）：
 接触对中心距≥3.5mm，正常条件下1500V，
 潮湿试验后1000 V；
 接触对中心距≥2.8mm，正常条件下1200V，
 潮湿试验后800V；
 绝缘电阻：常态≥5000MΩ，高温≥500MΩ，
 潮湿≥100MΩ；
 外壳所有连接处的总接触电阻：≤0.01Ω；
 接触对升温：不大于环境温度的50%；
 芯数：X14的有2、3、4、5、6、7、9芯；

芯数	3	4	5	7
排列图				
额定电流!	3	3	3	3
接触对直径、数量	φ1*3	φ1*4	φ1*5	φ1*7
工作电压 (AC.V.rms)	500	500	500	500
耐压 (AC.V) 1Min	1000	1000	1000	1000
接触电阻MΩ MAX	<5MΩ	<5MΩ	<5MΩ	<5MΩ
绝缘电阻MΩ	>500MΩ	>500MΩ	>500MΩ	>500MΩ

100Y 编号	厂商编号	说明	插脚	Rate Current/Voltage	外形尺寸
37762	X14K3P+J3A	方形金属连接器	3P	3A/500VAC	1
37763	X14K4P+J4A	方形金属连接器	4P	3A/500VAC	1
37764	X14K5P+J5A	方形金属连接器	5P	3A/500VAC	1
37766	X14K7P+J7A	方形金属连接器	7P	3A/500VAC	1

X22系列镀镍金属连接器

详细产品规格—请点击cn.100y.com.tw

主要技术参数
 额定工作电流：3A（接触对φ1.0mm），
 绝缘电阻：≥5000MΩ
 抗电强度（50Hz）：1500V（接触对中心距≥3.5mm）
 1200V（接触对中心距2.8mm）
 接触电阻：每个接触对≤0.005Ω
 插拔力：每个接触对为0.8~3牛顿，
 总插拔力不大于单个插拔力上限值总和的1.5倍
 寿命：插拔500次以上

使用条件
 环境温度：-55℃~+100℃
 相对湿度：温度为+44℃时达98%
 大气压力：达1KPa
 碰撞：加速度 500m/s²
 振动：振频 10~200Hz，150m/s²
 离心：加速度 500m/s²

芯数	4	10
排列图		
额定电流!	10*2 20*2	3
接触对直径、数量	φ2*2 φ3*2	φ1*10
工作电压 (AC.V.rms)	500	500
耐压 (AC.V) 1Min	1000	1000
接触电阻MΩ MAX	>5MΩ	>5MΩ
绝缘电阻MΩ	>500MΩ	>500MΩ

100Y 编号	厂商编号	说明	插脚	Rate Current/Voltage	外形尺寸
37805	X22K10P+J10A	方形金属连接器 10P	10	3A/500VAC	1
38430	X22K4P+J4A	方形金属连接器 4P	4P	3A/500VAC	1



服务专线:台湾:886-3-5753170
 传 真:台湾:886-3-5753172
 E-mail:台湾:sale@100y.com.tw

深圳:86-755-83298787
 深圳:86-755-83640655
 深圳:100y@163.com

上海:86-21-34970699
 上海:86-21-64605107
 上海:100y-1@163.com

10-40




XSR16系列金属连接器和附件

详细产品规格 - 请点击 cn.100y.com.tw

主要技术特性:

- 额定电流: 10A; 额定电压: 400V;
- 环境温度: -55℃~85℃;
- 相对湿度: 湿度为40℃时达93%;
- 振动: 频率为50~500Hz时 加速度达100m/s²;
- 冲击: 频率为60~80次/min 加速度达250m/s²
- 接触电阻: 0.0025Ω; 绝缘电阻: ≥1000MΩ;
- 试验电压: 1500V
- 分离力: 2~4N; 温升: ≤50℃; 寿命: 500次

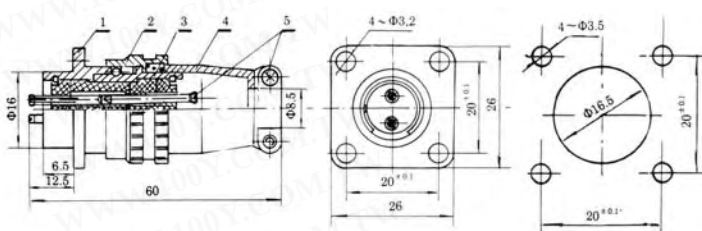

1. 凸缘壳体 2. 连接套 3. 壳体 4. 带翼套管 5. 螺钉

XSR型连接器适用于各类仪器仪表电子设备连接, 也可作为热电偶测试仪的电气连接之用。XSR型连接器外型、安装尺寸与SX16及CX16型插头座完全相同, 连接结构为推入式钢球锁紧, 插拔迅速, 端子接线形式为压接式, 使用方便可靠。

100Y 编号	厂商编号	说明	外形尺寸	插脚	M/F Plug/Socket	Rate Current/Voltage
15215	XSR16K2P-XSR16J2A	XSR16 Series - Industrial Circular Connectors	16mm	2P	J: Plug K: Socket	10A/400V

Cx16系列镀镍金属连接器





Cx型连接器有外壳配合直径为16、24 (mm) 两种规格, 接触对有3、4、5、7、9、12、19、20、26芯九种, 可配屏蔽或非屏蔽电缆。外形为直径。可作为仪器仪表, 电气及无线电设备间电源连接, 电缆间相互连接或穿墙、隔板连接之用。

100Y 编号	厂商编号	说明	插脚	公/母 头/座	Rate Current/Voltage	外形尺寸
38433	CX16Z-F-3P	X16 Series - 镀镍方形连接器	3P	F 插头+M 圆插座	5A/500V	ψ16
38434	CX16Z-F-4P	X16 Series - 镀镍方形连接器	4P	F 插头+M 圆插座	5A/500V	ψ16
38435	CX16Z-F-5P	X16 Series - 镀镍方形连接器	5P	Female Plug+Male Socket	5A/500V	16mm
38436	CX16Z-F-7P	X16 Series - 镀镍方形连接器	7P	Female Plug+Male Socket	5A/500V	16mm
38437	CX16Z-F-9P	X16 Series - 镀镍方形连接器	9P	Female Plug+Male Socket	5A/500V	16mm

Mt8系列镀镍金属连接器



MT8-3T(镀镍)

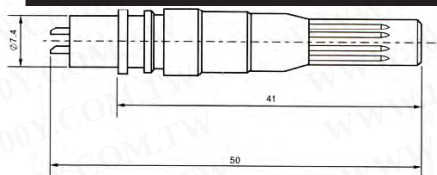详细产品规格 - 请点击 cn.100y.com.tw

100Y 编号	厂商编号	说明	插脚	外形尺寸
32663	MT8-2T(镀镍)	镀镍金属连接器	2P	8mm
32665	MT8-3T(镀镍)	镀镍金属连接器	3P	8mm
29212	MT8-4T(镀镍)	镀镍金属连接器	4P	8mm

Xs12系列铝合金连接器



XS12K4P+XS12J4A(铝合金)



XS12K5P+XS12J5A(铝合金)



XS12K7P+XS12J7AY(铝合金)




XS12K7P+XS12J7A(铝合金)

Xs12系列连接器外壳配合直径为12mm, 接触对为6种, 插头为带翼套管或直形套, 可安装在仪器面板上使用, 产品外形小巧美观, 工艺精密成形, 结构为卡扣式钢球锁紧。

主要技术特性:

- 环境温度: -55℃~85℃
- 相对湿度: 湿度为40℃, 达93%
- 大气压力: 达4 Kpa
- 振动: 加速度达100 m/s²
- 冲击: 加速度达250 m/s²
- 离心: 加速度达250 /S²
- 额定电流: 3A
- 额定电压: 250V
- 接触电阻: 每一接触对的接触电阻不大于0.005Ω
- 绝缘电阻: 正常条件下不小于1000 mΩ

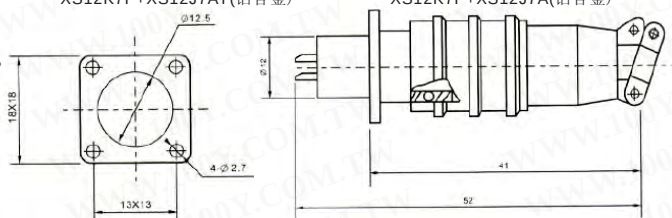

100Y 编号	厂商编号	说明	外形尺寸	插脚	M/F Plug/Socket	Rate Current/Voltage
15212	XS12K3P+XS12J3A(铝合金)	XS12 铝合金圆形插头+方形插座连接器	12mm	3P	J: Plug K: 方形 Socket	3A/250V
16423	XS12K3P+XS12J3AY(铝合金)	XS12 铝合金圆形插头+圆形插座连接器	12mm	3P	F 插头+M 插座	3A/250V
15213	XS12K4P+XS12J4A(铝合金)	XS12 铝合金圆形插头+方形插座连接器	12mm	4P	J: Plug K: Socket	3A/250V
16422	XS12K4P+XS12J4AY(铝合金)	XS12 铝合金圆形插头+圆形插座连接器	12mm	4P	J: Plug K: Socket	3A/250V
29209	XS12K5P+XS12J5A(铝合金)	铝合金插头+方形插座连接器	12mm	5P	F 插座+M 插头	3A
16424	XS12K5P+XS12J5AY(铝合金)	XS12 铝合金圆形连接器	12mm	5P	J: Plug K: Socket	3A/250V
28704	XS12K7P+XS12J7A(铝合金)	XS12 铝合金圆形插头+方形插座连接器	12mm	7P	F 插头+M 插座	3A/250V
29210	XS12K7P+XS12J7AY(铝合金)	铝合金圆形插头+圆形插座连接器	12mm	7P	F 座/M 头	3A



服务专线: 台湾: 886-3-5753170

传 真: 台湾: 886-3-5753172

E-mail: 台湾: sale@100y.com.tw

深圳: 86-755-83298787

深圳: 86-755-83640655

深圳: 100y@163.com

上海: 86-21-34970699


上海: 86-21-64605107

上海: 100y-1@163.com

10-41

Mt8系列镀金金属连接器

详细产品规格 - 请点击 cn.100y.com.tw

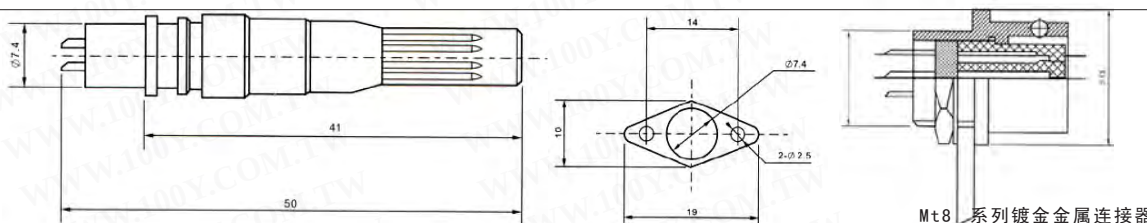



100Y 编号	厂商编号	说明	外形尺寸	插脚
29242	MT8-3T(铜)	镀金金属连接器(铜)	8mm	3P

CZS-20系列



技术特性:

- 额定电流: 5A
- 额定电阻: AC 200V a minute
- 绝缘电阻: $>500\text{M}\Omega$
- 接触电阻: $<3\text{M}\Omega$





100Y 编号	厂商编号	说明	插脚	公头/母头(座)	Rate Current/Voltage	外形尺寸
29243	C7S-20K4P+C7S-20J4A	透明塑料连接器	4P	公头/方形母座	5A/200V	20mm

Yd系列圆形连接器



产品特点:



- 连接器设计有保护接地极，接地极触针略长于其它触针，使得连接器连接时，保护接地极触针首先接通，载流触针后接通，分离时，载流触针先断开，保护接地极后断开。
- 插头采用螺帽锁紧，可靠性强，适合高密度电气设备的连接。
- 连接器的头和座，分别配有防尘盖。
- 连接器插头外壳有固定金属软管和圆形电缆两种结构。
- 低电阻。
- 连接器设计具有防尘和防水的性能。

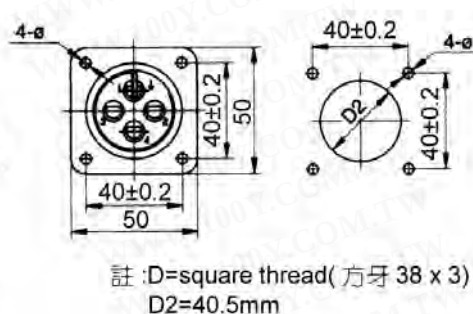

Yd系列圆形电连接器尾部出线口处配有国际通用的Pg制接头。耦合方式为螺纹连接。外壳防护等级：塑料软管IP54；电缆密封式IP65。接线方式为焊接式。

主要技术特性:


- 环境温度: $-55^{\circ}\text{C} \sim 85^{\circ}\text{C}$
- 相对湿度: 温度为 40°C 时, 可达 98%
- 耐压: 2000V (交流有效值)
- 绝缘电阻: 大于 2000Ω
- 额定电压: 500V (交流有效值)
- 振动: 振动频率为 $10 \sim 500\text{Hz}$, 加速度达 100m/s^2
- 碰撞: 频率为 $40 \sim 80$ 次/分, 加速度达 250m/s^2
- 寿命: 500次

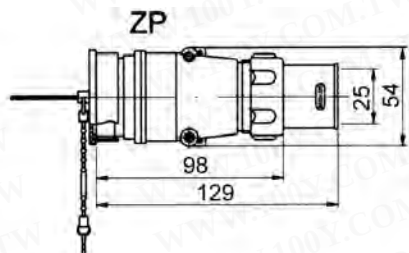

100Y 编号	厂商编号	说明	外形尺寸	插脚	M/F Plug/Socket	Rate Current/Voltage
16002	YD40J31Z+YD40K31TO	YD40 圆形连接器+防尘盖	40mm	31P	K:插孔 T:插头	10A/500V

Trident Connector Crimp Contacts (Solid Machined)

详细产品规格 - 请点击 cn.100y.com.tw

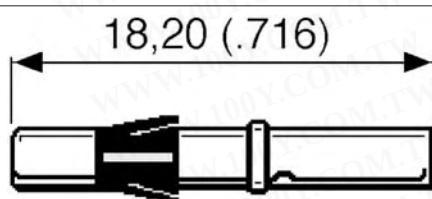

13A current rating
Separate contact and retention spring
Up to 500 mating cycles
Variety of plating options
Full support tooling available



100Y 编号	厂商编号	制造厂商	说明	接收端/YES
17577	F3806728	ITT	Trident Connector Crimp Contacts	Socket contact





AMP Circular Plastic Connectors




0-182658-1

Features:
 Shell size : 11
 Cable diameter(max)(mm[in]) : 8.36[0.329]
 Cable clamp material : thermoplastic
 Packaging method : individual
 Body style : straight
 Cover : without

Other properties:

Thread size : 5/8-24 UNEF-2B
 Cable clamp flammability rating : UL94V-0
 Packaging quantity : 50


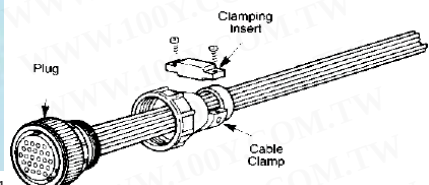


详细产品规格 - 请点击cn.100y.com.tw



0-163088-1


Other properties:
 Pin diameter(mm[in]) : 1.57[0.062]
 Wire/cable type : regular wire
 Test current(Amps) : 13.0
 Spring material : stainless steel
 Packaging quantity : 200
 Grade : commercial

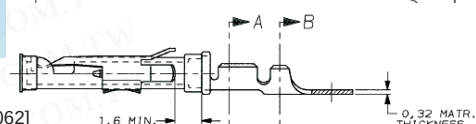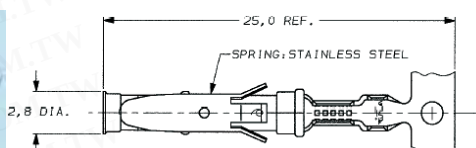

Features:
 Wire range (mm[amg]) : 0.20-0.562[24-20]
 Insulation diameter(mm[in]) : 1.14-1.80[0.045-0.071]
 Contact material : Brass Termination end plating : Tin
 Contact size : 16 Contact type : signal
 Terminate to : wire Wire termination type : crimp
 Packaging method : loose piece




0-0182655-1

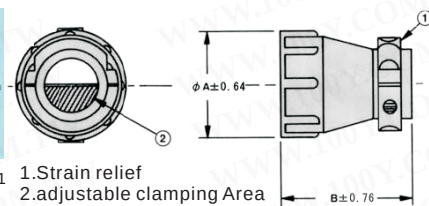

1.Strain relief
 2.adjustable clamping Area




0-0206061-1

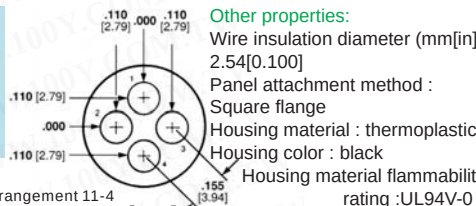

Other properties:

Wire insulation diameter (mm[in]) : 2.54[0.100]
 Panel attachment method : Square flange
 Housing material : thermoplastic
 Housing color : black
 Housing material flammability rating : UL94V-0

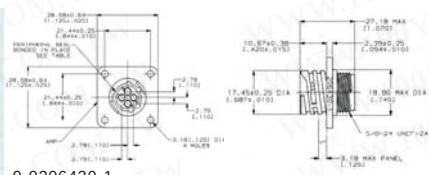


0-0206430-1

Features:
 Terminate To : Wire Shell Size:11 Shell Type :All Plastic
 Mount Style : Mounting Holes Standard or Reverse Gender : reverse
 Shell Thread Size:5/8-24 UNEF-2A Product Series :Series 1



0-206036-1

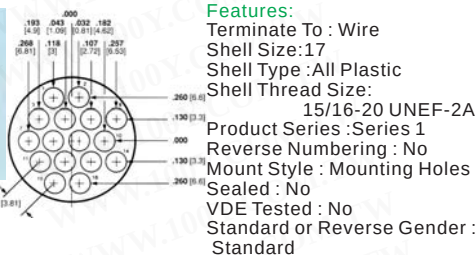


Features:


Terminate To : Wire
 Shell Size:17
 Shell Type :All Plastic
 Shell Thread Size: 15/16-20 UNEF-2A
 Product Series :Series 1
 Reverse Numbering : No
 Mount Style : Mounting Holes
 Sealed : No
 VDE Tested : No
 Standard or Reverse Gender : Standard



0-0206037-1

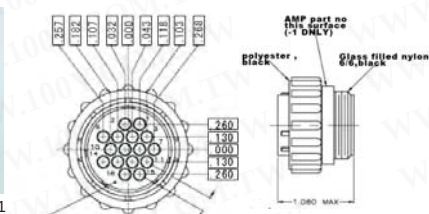

0-163086-1

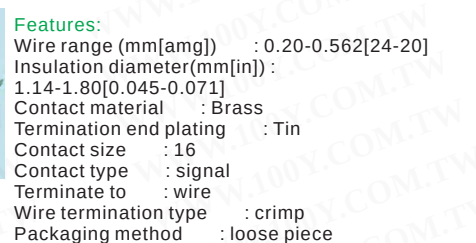


Features:

Wire range (mm[amg]) : 0.20-0.562[24-20]
 Insulation diameter(mm[in]) : 1.14-1.80[0.045-0.071]
 Contact material : Brass
 Termination end plating : Tin
 Contact size : 16
 Contact type : signal
 Terminate to : wire
 Wire termination type : crimp
 Packaging method : loose piece

100Y 编号	厂商编号	制造厂商	说明	插脚	公头/母头(座)	接收端/YES	插入端/YES
18178	0-0182655-1	AMP	Cable Clamp	16P	母		
34987	0-0206037-1	AMP	AMP Series 1 CPC Circular Plastic Connectors Receptacle-Square Flanged Receptacle-Free Hanging Plug	16P	母		
18179	0-0206061-1	AMP	AMP Series 1 CPC Circular Plastic Connectors Receptacle-Square Flanged Receptacle-Free Hanging Plug	4P	SHELL		
18189	0-0206430-1	AMP	Receptacle Housing, Reverse Sex, Shell Size 11,CPC	4P	母座		
19750	0-163086-1	AMP	公 Pin		公头		
18685	0-163088-1	AMP	Socket Loose piece		母头	Y	
19762	0-182658-1	AMP	Cable Clamp	For:4P			
18383	0-206036-1	AMP	Receptacle-Square Flanged Receptacle-Free Hanging Plug	16P	公头	No	Yes

SCSI型连接头+外壳 插板式 HD/HC 公/母座

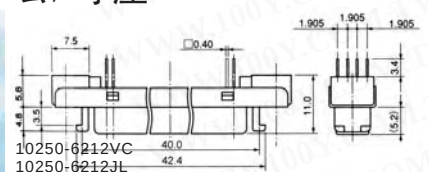

- 基板适用厚度: 1.6mm~2.4mm
- 电流: 0.5A
- 电压: AC150V/DC200V
- 环境温度: -55℃~85℃
- 绝缘电阻: 500MΩ 以上

3M



Contact type:
 Ribbon
 Contact plating :
 Gold flash
 shell plating :
 Ni plating


100Y 编号	厂商编号	制造厂商	说明	No. of ways	HC/HD Type	角度
12793	10250-6212JL	3M	3M_Mini Delta Ribbon Connector, Boardmount Thru Hole Vertical Receptacle 母座	50P	HC	180°
34324	10250-6212VC	3M	3M_Mini Delta Ribbon Connector, Boardmount Thru Hole Vertical Receptacle 母座	50P	HC	180°
12087	SCSRR-F2001N000		HC-Type FEMALE	20P	HC-FEMALE	90°





10250-52A2JL

电流: 0.5A
电压: AC:150V MAX./DC:200V
温度范围: -55°C to +85°C
绝缘电阻: 500MΩ 以上
基板适用厚度: 1.6mm~2.4mm

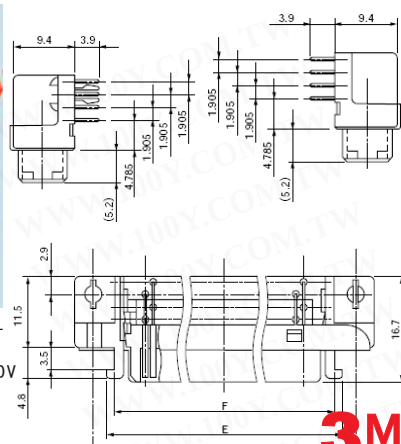


3M



10226-1210PE

Electrical
Current Rating: 1A
Insulation Resistance:
> 5 × 10⁸Ω at 500 VDC
Withstanding Voltage:
500 Vrms for 1 Minute
Temperature rating:
-55°C to +105°C

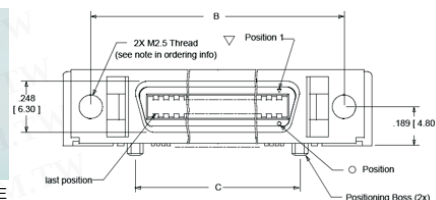


3M




DHD-68SR

No. of contacts:
Ribbon Type: 14, 20, 26, 36, 50
Pin Type: 50, 68
Pin Contacts: Phosphor
bronze/ Gold Plated
Bracket: Nickel plated

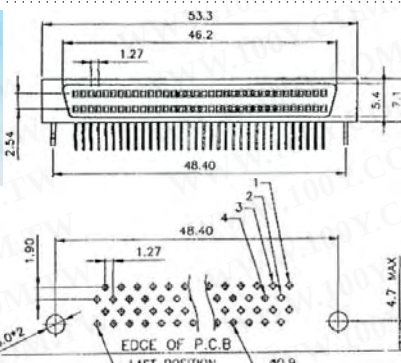

10220-6202JL

电流: 0.5A
电压: AC:150V MAX./DC:200V
温度范围: -55°C to +85°C
绝缘电阻: 500MΩ 以上
基板适用厚度: 1.6mm~2.4mm


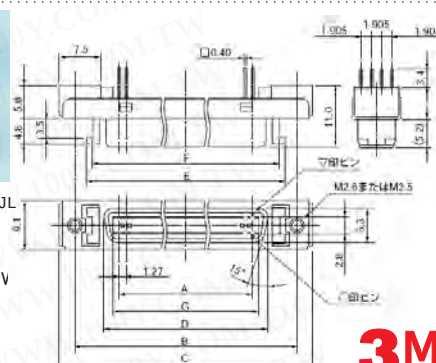


3M



10150-52A2-JL

电流: 0.5A
电压: AC:150V MAX./DC:200V
温度范围: -55°C to +85°C
绝缘电阻: 500MΩ 以上
基板适用厚度: 1.6mm~2.4mm

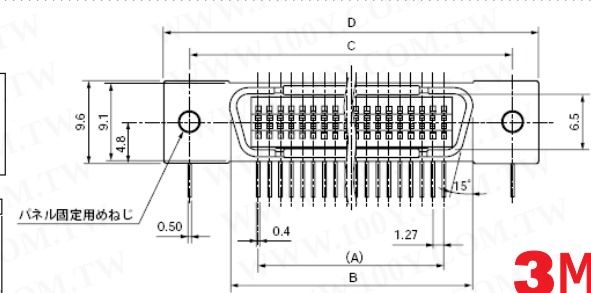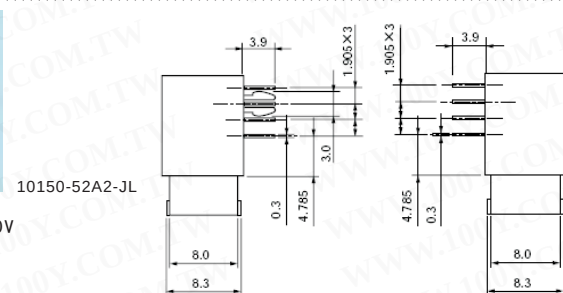

3M


100Y 编号	厂商编号	制造厂商	说明	No. of ways	HC/HD Type	角度
16652	10150-52A2-JL	3M	3M_Mini D Ribbon (MDR) Connector, Boardmount Plugs, Thru-Hole Right Angle Plug, 插板式公座	50P	HC	90°
30112	10220-5202JL	3M	3M_Mini Delta Ribbon Connector, Boardmount Thru Hole Vertical Receptacle 母座	20P	HC	90°
31474	10220-52A2JL	3M	3M_Mini Delta Ribbon Connector, Boardmount Thru Hole Vertical Receptacle 母座	20P	HC	90°
29738	10220-6202JL	3M	3M_Mini Delta Ribbon Connector, Boardmount Thru Hole Vertical Receptacle 母座	20P	HC	180°
40583	10226-1210PE	3M	3M_Mini Delta Ribbon Connector, Boardmount Thru Hole Vertical Receptacle 母座	26P		
31045	10226-52A2JL	3M	3M_Mini Delta Ribbon Connector, Boardmount Thru Hole Vertical Receptacle 母座	26P	HC	90°
31475	10250-52A2JL	3M	3M_Mini Delta Ribbon Connector, Boardmount Thru Hole Vertical Receptacle 母座	50P	HC	90°
20055	DHD-68SR		HARPOON FEMALE 68P GOLD FLASH NI PLAT	68P	HD Type	90°
11967	SCSRH-F4001N000		HARPOON FEMALE 40P GOLD FLASH NI PLAT	40P	HD Type	90°

HD/HC 连接公/母头

详细产品规格 - 请点击 cn.100y.com.tw


68LDP-A-P-1

额定电流: 1A
接触电阻: 30 MΩ Max
绝缘电阻: 3000 MΩ min 500VDC
温度范围: -55°C~+105°C
介质耐电压: 500V AC/min

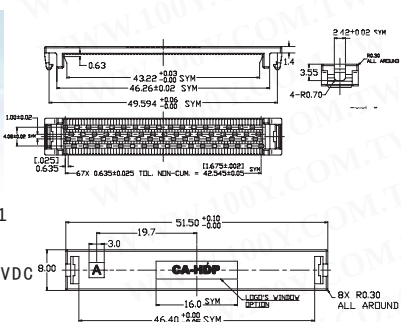

CA-68MDS-A-0

额定电流: 1A
接触电阻: 30 MΩ Max
绝缘电阻: 3000 MΩ min 500VDC
温度范围: -55°C~+105°C
介质耐电压: 500V AC/min

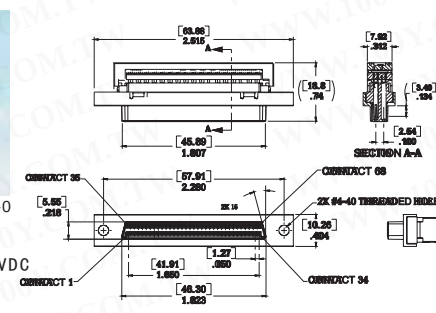

100Y 编号	厂商编号	说明	No. of ways	HC/HD Type
10026	68LDP-A-P-1	Half Pitch SCSI Connectors HD68F	68P	SCSI 压排公头
12236	CA-68MDS-A-0	Half Pitch SCSI Connectors HD68F	68P	HD 压排铁母头





C-Type连接头/座

焊线式公/母连接头



详细产品规格 - 请点击 cn.100y.com.tw







10150-3000VE+10350-52A0-008
10136-3000VE+10336-52A0-008
10120-3000VE+10320-52A0-008
20, 36 & 40 Position

Solder plug shielded I/O connector.
Accepts wide variety of discrete wire cabletypes AWG 24~30.
Soldering wire contact cup requires nospecial tooling.
Ribbon type contact: industry preferred.
Reliable repetitive plugging/unplugging.
Positions:14, 20, 26, 36, 40 and 50
额定电流:1A
绝缘电阻:>5 x 108Ω at 500 VDC
承受电压:500 Vrms for 1 Minute.
温度范围: -55℃ to +105℃

14, 26 & 50 Position



3M

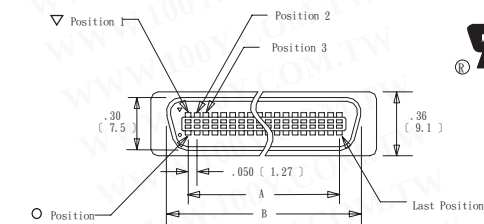



Inch	(mm)
Tolerance Unless Noted	
.0	.00 .000
Inch	+.1 +.01 +.005

Dimensions for Reference only



10114-3000VE+10314-52F0-008
10126-3000VE+10326-52F0-008
10150-3000VE+10350-52F0-008


电流:0.5A
电压:AC:150V MAX./DC:200V MAX
温度范围: -55℃ to +85℃
绝缘电阻:500MΩ 以上
保持力:9.8N以上 (1Kgf)
拔出力:插入力 1.47N 以下 (150gf)
拔出力 0.39N 以上 (40gf)

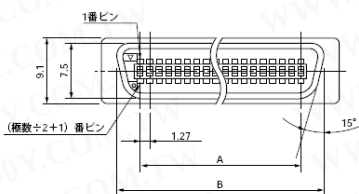



3M



10336-52A0-008
温度范围: -55℃ to +105℃



□等表示位置





3M





10126-3000VE+10326-52A0-008

电流:0.5A
电压:AC:150V MAX./DC:200V MAX
温度范围: -55℃ to +85℃
绝缘电阻:500MΩ 以上
保持力:9.8N以上 (1Kgf)
拔出力:插入力 1.47N 以下 (150gf)
拔出力 0.39N 以上 (40gf)

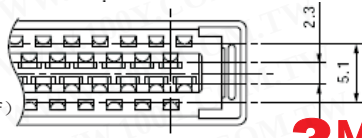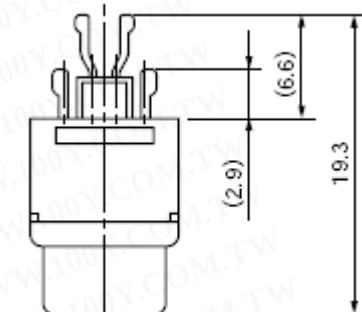


3M

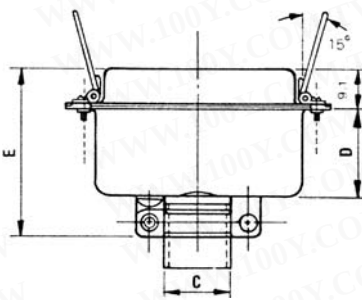

100Y 编号	厂商编号	制造厂商	说明	类型	Contacts
37777	10114-3000VE+10314-52F0-008	3M	10114+Shell 高密度 HC50Pins+弹片式外壳	焊线式公头	14P
17196	10120-3000VE+10320-52A0-008	3M	10120+Shell 高密度 HC20Pins(公)+外壳	HC	20P
33040	10126-3000VE+10326-52F0-008	3M	10126+Shell 高密度 HC26Pins+弹片式外壳	HC36P+外壳	26P
12709	10136-3000VE+10336-52A0-008	3M	10136+Shell 高密度 HC36Pins+外壳		36P
12262	10150-3000VE+10350-52A0-008	3M	10150+Shell 高密度 HC50Pins+外壳		50P
32131	10150-3000VE+10350-52F0-008	3M	10150+Shell 高密度 HC50Pins+弹片式外壳		50P
39937	10336-52A0-008	3M	3M_36Pin MDR 外壳		
2925	E22-24P		焊线母头+铁壳	焊线式母头	24 P




E19-14P



100Y 编号	厂商编号
15315	E19-14P

P. C BOARD LAYOUT RATTERN 29.40




说明	类型	Contacts
C-Type 焊线母头+铁壳	焊线式	14P






E18-14P

POSITION	A	B	C
14M	25.50	29.40	38.50
24M	36.30	40.20	49.30
36M	49.30	53.50	62.00
50M	64.40	68.30	77.40

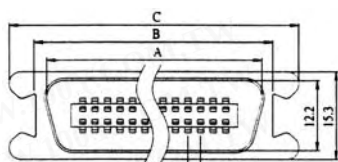


P. C BOARD LAYOUT RATTN




E20-36P

POSITION	A	B	C	D
14M	25.5	29.4	38.5	21.2
24M	36.3	40.2	49.3	21.2
36M	49.3	53.5	62.0	22.6
50M	64.4	68.3	77.4	24.8

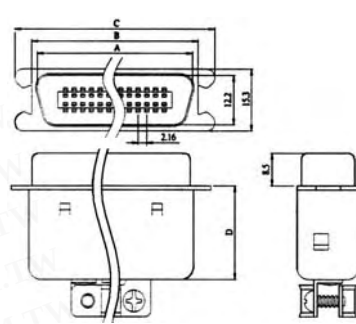

额定电流: 1A 10136-6000EL
绝缘电阻: >1x108Ω at 500VDC
承受电压: 500 Vrms for 1 minute
温度范围: -55℃ to +105℃
焊剂过程: 360℃ max for 10sec. max

Contact Quantity	Dimensions		
	A	B	C
14	.300[7.62]	.54[13.8]	.72[18.2]
20	.450[11.43]	.69[17.6]	.87[22.0]
26	.600[15.24]	.85[21.5]	1.02[25.8]
36	.850[21.59]	1.09[27.8]	1.27[32.2]
40	.950[24.13]	1.19[30.3]	1.37[34.7]
50	1.200[30.48]	1.44[36.7]	1.62[41.1]




3M




额定电流: 1A 10136-3000PE
绝缘电阻: >1x108Ω at 500VDC
承受电压: 500 Vrms for 1 minute
温度范围: -55℃ to +105℃
焊剂过程: 360℃ max for 10sec. max

Contact Quantity	Dimensions		
	A	B	C
14	.300[7.62]	.54[13.8]	.72[18.2]
20	.450[11.43]	.69[17.6]	.87[22.0]
26	.600[15.24]	.85[21.5]	1.02[25.8]
36	.850[21.59]	1.09[27.8]	1.27[32.2]
40	.950[24.13]	1.19[30.3]	1.37[34.7]
50	1.200[30.48]	1.44[36.7]	1.62[41.1]

20, 36 & 40 Position



3M




E22-36P



10136-3000VE

3M

极数	编号	A	B	C
36	10136-3000VE	21.59	27.8	32.2

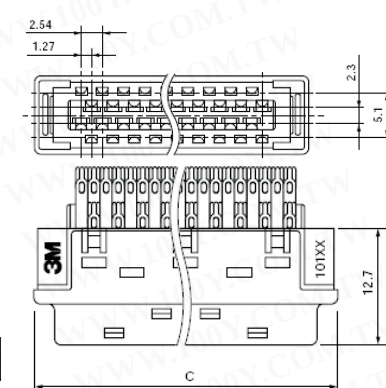


E20-50P-2



E22-50P



E20-14P

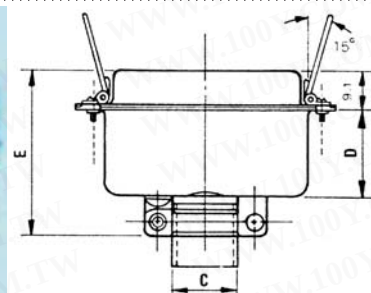


100Y 编号	厂商编号	制造厂商	说明	类型	Contacts
23053	10126-3000VE+10326-52A0-008	3M	10126+Shell 高密度 HC26Pins+外壳(焊接式,锁螺丝型)	HC	26P
39936	10136-3000PE	3M	3M_MDR 10136 高密度 HC36Pin 公	HC36P	36P
39282	10136-3000VE	3M	3M_MDR 10136 高密度 HC36Pin 公	HC36P	36P
39283	10136-6000EL	3M	3M_IDC 10136 36Pin 公		36P
15247	E18-14P		C-Type 焊线公头+铁壳	焊线式	14P
11331	E20-14P		C-Type 焊线公头+铁壳	焊线公头	14P
3312	E20-24P		焊线公头+铁壳	焊线公头	24P
3313	E20-36P		焊线公头+铁壳	焊线公头	36 P
2312	E20-50P		焊线公头+铁壳	焊线公头	50 P
34902	E20-50P-2				
11332	E22-14P		C-Type 焊线母头+铁壳	焊线式母头	14P
2311	E22-36P		焊线母头+铁壳	焊线式母头	36 P
3345	E22-50P		焊线母头+铁壳	焊线母头	50P





插板式连接座

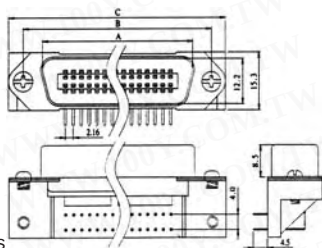


Electrical Characteristics: E26

- Contact Current Rating: 5 Amps
- Dielectric Withstanding Voltage: AC 1250V, r.m.s.
- Insulation Resistance: 5000MOhms Min. @ DC 500V
- Contact Resistance: 5 Milliohms Max.
- Operating Temperature: -55 deg. C to + 105 deg C

100Y 编号	厂商编号	说明	Contacts	角度
4392	E25-24P	插板式公座	24P	90°
4393	E25-36P	插板式公座	36P	90°
4394	E25-50P	插板式公座	50P	90°
4391	E26-24P	插板式母座	24P	90°
4389	E26-36P	插板式母座	36P	90°
11138	E26-50P	插板式母座	50P	90°


详细产品规格 - 请点击 cn.100y.com.tw




说明: E25

- 电流: 1A
- 接触电阻: 25MΩ Max
- 绝缘电阻: 1000MΩMax At 500V DC
- 介质耐电压: 1000V AC/Min
- 温度范围: -55℃to+105℃

压排线式公 / 母头




Product No.	A	B	C	D	E	100Y 编号	厂商编号	说明	Contacts
E27-24P	48.6	40.4	36.3	35.5	22.85	4385	E27-24P	C-Type 压排式公头	24P
E27-36P	61.6	53.4	49.2	50.8	36.72	4386	E27-36P	C-Type 压排式公头	36P
E27-50P	76.4	68.2	64.8	68.6	51.84	4387	E27-50P	C-Type 压排式公头	50P




Product No.	A	B	C	D	E	100Y 编号	厂商编号	说明	Contacts
E28-24P	54.7	46.8	35.6	35.6	23.76	4388	E28-24P	C-Type 压排式母头	24P
E28-36P	67.7	59.7	48.8	50.8	36.74	4046	E28-36P	C-Type 压排式母头	36P
E28-50P	82.8	74.9	64.3	68.6	51.84	4441	E28-50P	C-Type 压排式母头	50P

空中连接线和公插/母插

Φ 1.3 7008公插头/7007母插头系列+端子

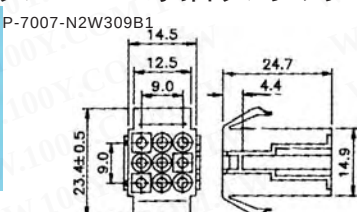


- No. of Circuits: 2,3,4(1x4)/(2x2),6,9,12,15
- Material: Nylon 66 UL 94V-2
- Contact Material: Brass
- Contact Finish: 60u" Tin Plated or select Gold Plating

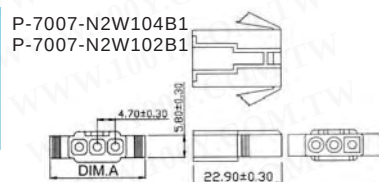


- TERMINAL
- MATERIAL: 0.25T BRASS
 - PLATING: COPPER-UNDERCOATED, TIN-PLATED
 - WIRE RANGE: SUITABLE FOR AWG #16~26
- HOUSING MATERIAL: NYLON 66, UL 94V-0, V-2
- PITCH: 4.5 (.177")
 - CIRCUITS: 2, 3, 4, 6, 9, 12, 15
 - RECEPTACLE HOUSING MATES WITH PT 7007
 - PLUG HOUSING MATES WITH P7008

100Y 编号	厂商编号	说明	公/母 插头/端子	插脚	Pitch
12494	P-7007-N2W102B1	Nylon 66 UL94V-2	母插头	2P	4.5mm
12495	P-7007-N2W104B1	Nylon 66 UL94V-2	母插头	4P	4.5mm
12724	P-7007-N2W206B1	NYLON 66 UL94V-2	母插头	6P	4.5mm
16217	P-7007-N2W309B1	Nylon 66 UL94V-2	母插头	9P	4.5mm
16218	P-7008-N2W30900	Nylon 66 UL94V-2	公插头	9P	4.5mm

详细产品规格 - 请点击 cn.100y.com.tw

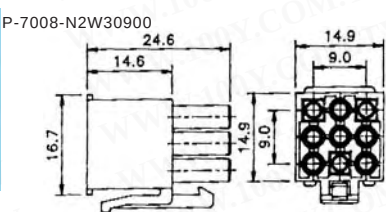

- No. of Circuits: 2,3,4(1x4)/(2x2),6,9,12,15
- Material: Nylon 66 UL 94V-2
- Contact Material: Brass
- Contact Finish: 60u" Tin Plated or select Gold Plating

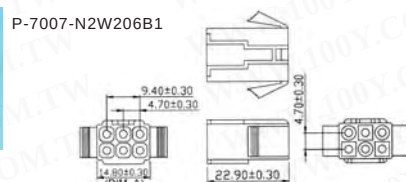

- TERMINAL
- MATERIAL: 0.25T BRASS
 - PLATING: COPPER-UNDERCOATED, TIN-PLATED
 - WIRE RANGE: SUITABLE FOR AWG #16~26
- HOUSING MATERIAL: NYLON 66, UL 94V-0, V-2
- PITCH: 4.5 (.177")
 - CIRCUITS: 2, 3, 4, 6, 9, 12, 15
 - RECEPTACLE HOUSING MATES WITH PT 7007
 - PLUG HOUSING MATES WITH P7008






Φ 1.3 7008公插头/7007母插头系列+端子

详细产品规格 - 请点击 cn.100y.com.tw





TERMINAL P-7008-N2W10400

- MATERIAL: 0.25T BRASS
- PLATING: COPPER-UNDERCOATED, TIN-PLATED
- WIRE RANGE: SUITABLE FOR AWG #16~26
- HOUSING MATERIAL: NYLON 66, UL 94V-0, V-2
- PITCH: 4.5 (.177") CIRCUITS: 2, 3, 4, 6, 9, 12, 15
- RECEPTACLE HOUSING MATES WITH PT 7007
- PLUG HOUSING MATES WITH Pt7008

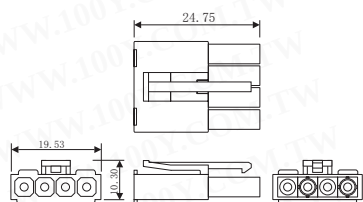


TERMINAL P-7008-N2W10200



- MATERIAL: 0.25T BRASS
- PLATING: COPPER-UNDERCOATED, TIN-PLATED
- WIRE RANGE: SUITABLE FOR AWG #16~26
- HOUSING MATERIAL: NYLON 66, UL 94V-0, V-2
- PITCH: 4.5 (.177") CIRCUITS: 2, 3, 4, 6, 9, 12, 15
- RECEPTACLE HOUSING MATES WITH PT 7007
- PLUG HOUSING MATES WITH Pt7008

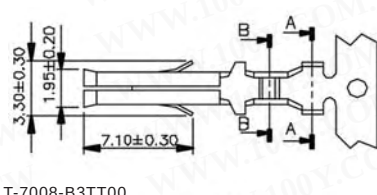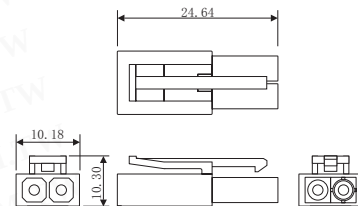

T-7008-B3TT00

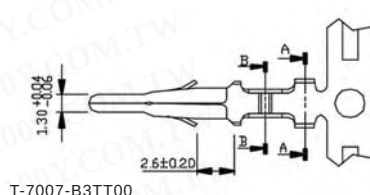

T-7007-B3TT00



P-7008-N2W20600

TERMINAL

- MATERIAL: 0.25T BRASS
- PLATING: COPPER-UNDERCOATED, TIN-PLATED
- WIRE RANGE: SUITABLE FOR AWG #16~26
- HOUSING MATERIAL: NYLON 66, UL 94V-0, V-2
- PITCH: 4.5 (.177") CIRCUITS: 2, 3, 4, 6, 9, 12, 15
- RECEPTACLE HOUSING MATES WITH PT 7007
- PLUG HOUSING MATES WITH Pt7008

100Y 编号	厂商编号	说明	公/母 插头/端子	插脚	Pitch	Packing
12492	P-7008-N2W10200	Nylon 66 UL94V-2	公插头	2P	4.5mm	
12493	P-7008-N2W10400	Nylon 66 UL94V-2	公插头	4P	4.5mm	
12723	P-7008-N2W20600	NYLON 66 UL94V-2	公插头	6P	4.8mm	
12496	T-7007-B3TT00	Brass C2680R-H 镀锡铅端子				5000PCS/R
12497	T-7008-B3TT00	Brass C2680R-H 镀锡铅端子(母针)			4.5mm	5000PCS/R


Φ 1.58 空中接头 公/母接头系列和端子

详细产品规格 - 请点击 cn.100y.com.tw




TERMINAL

- MATERIAL: 0.2T, BRASS
- PLATING: COPPER-UNDERCOATED, TIN-PLATED
- WIRE RANGE: SUITABLE FOR AWG #20~#26
- HOUSING MATERIAL: NYLON 66, UL 94V-0, V-2
- PITCH 5010P(R)H, 5011P(R)H: 3.68(.145")
- 5010-1P(R)H, 5011-1P(R)H: 4.8(.189")
- CIRCUITS: 1,2,3,4,5,6,9,12
- RECEPTACLE HOUSING MATES WITH PT 5010
- PLUG HOUSING MATES WITH PT 5011



TERMINAL

- MATERIAL: 0.2T, BRASS
- PLATING: COPPER-UNDERCOATED, TIN-PLATED
- WIRE RANGE: SUITABLE FOR AWG #20~#26
- HOUSING MATERIAL: NYLON 66, UL 94V-0, V-2
- PITCH 5010P(R)H, 5011P(R)H: 3.68(.145")
- 5010-1P(R)H, 5011-1P(R)H: 4.8(.189")
- CIRCUITS: 1,2,3,4,5,6,9,12
- RECEPTACLE HOUSING MATES WITH PT 5010
- PLUG HOUSING MATES WITH PT 5011




Part No.	Product No.	说明	Pins	插入端/YES	接收端/YES
11267	G01-02PR	公接头-大有耳	2P	YES	NO
11268	G01-03PR	公接头-大有耳	3P	YES	NO
11269	G01-04PR	公接头-大有耳	4P	YES	NO
11270	G02-02PR	母接头-大有耳	2P	NO	YES
11271	G02-03PR	母接头-大有耳	3P	NO	YES
11272	G02-04PR	母接头-大有耳	4P	NO	YES



Φ 1.58 空中接头 公/母接头系列和端子

详细产品规格－请点击cn.100y.com.tw

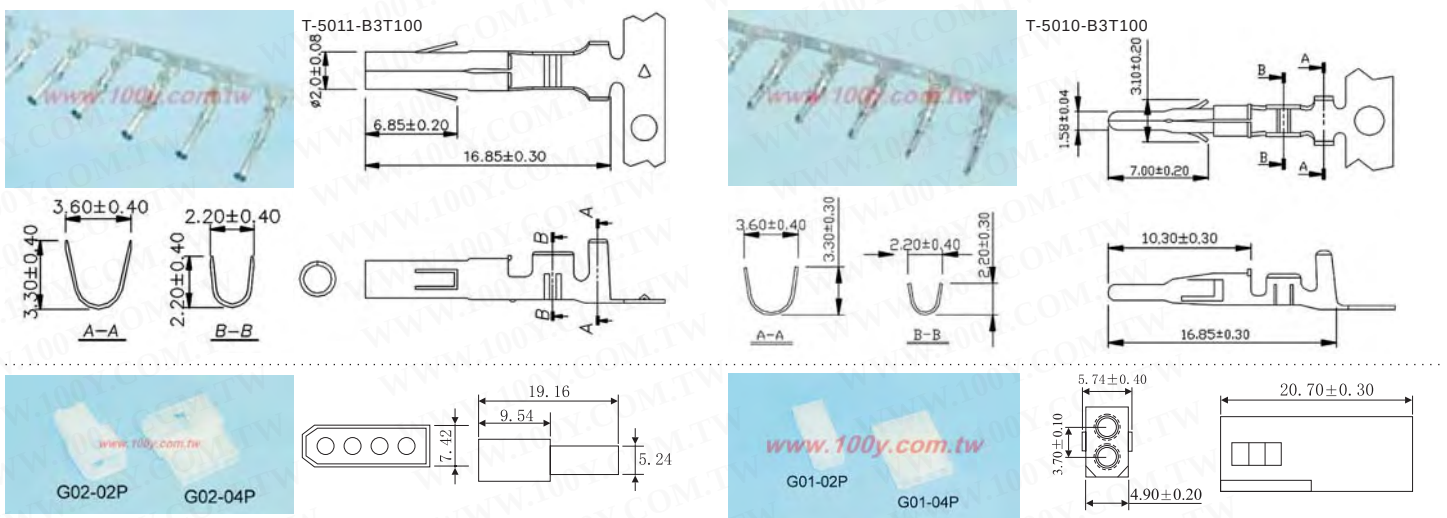

TERMINAL
●MATERIAL: 0.2T, BRASS
HOUSING
●MATERIAL: NYLON 66, UL 94V-0, V-2
●CIRCUITS: 1,2,3,4,5,6,9,12


PLATING: COPPER-UNDERCOATED, TIN-PLATED
PITCH 5010P(R)H, 5011P(R)H: 3.68(.145")
RECEPTACLE HOUSING MATES WITH PT 5010

WIRE RANGE: SUITABLE FOR AWG #20~#26
5010-1P(R)H, 5011-1P(R)H: 4.8(.189")
PLUG HOUSING MATES WITH PT 5011

Part No.	Product No.	说明	Pins	插入端/YES	接收端/YES	Packing
15038	G01-01P	1.58Φ1 公小无翅	1P			
11273	G01-02P	公接头-小无耳	2P	YES	NO	
11274	G01-03P	公接头-小无耳	3P	YES	NO	
11275	G01-04P	公接头-小无耳	4P	YES	NO	
39019	G01-05P	1.58Φ5 公小无翅	5P			
39020	G01-06P	1.58Φ6 公小无翅	6P			
32174	G01-06PR	公接头-大有耳	6P	YES	NO	
32175	G01-09PR	公接头-大有耳	9P	YES	NO	
32176	G01-12PR	公接头-大有耳	12P	YES	NO	
32177	G01-15PR	公接头-大有耳	15P	YES	NO	
15039	G02-01P	母接头-小无耳	1P	NO	YES	
11276	G02-02P	母接头-小无耳	2P	NO	YES	
11277	G02-03P	母接头-小无耳	3P	NO	YES	
11278	G02-04P	母接头-小无耳	4P	NO	YES	
39021	G02-05P	母接头-小无耳	P5	NO	YES	
39022	G02-06P	母接头-小无耳	6P	NO	YES	
32178	G02-06PR	母接头-大有耳	6P	NO	YES	
32179	G02-09PR	母接头-大有耳	9P	NO	YES	
32180	G02-12PR	母接头-大有耳	12P	NO	YES	
32181	G02-15PR	母接头-大有耳	15P	NO	YES	
12942	T-5010-B3T100	T-5010-B3T100 镀锡铅(公针)	--	NO	YES	5,000PCS/R
14141	T-5011-B3T100	5011 系列端子(母)	--	--	--	5,000PCS/R

5015, 5016 电源公座, 母头和连接头用端子

详细产品规格－请点击cn.100y.com.tw

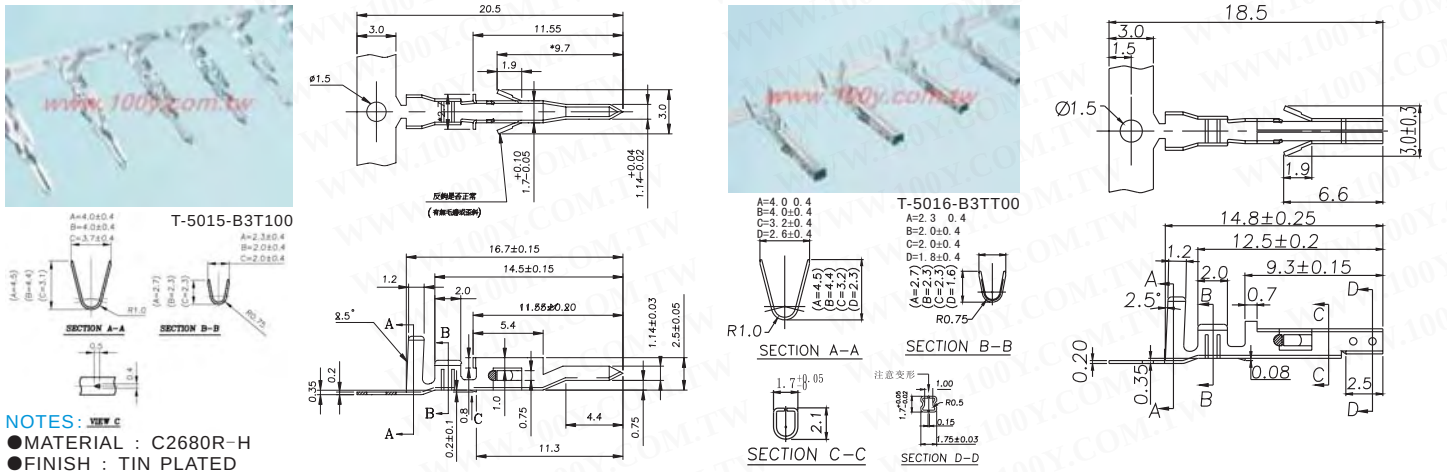


100Y 编号	厂商编号	说明	Packing
14139	T-5015-B3T100	5015 系列公 PIN	5,000PCS/R
40592	T-5016-B3T100	5016 系列用端子(母针)	5,000PCS/R



5015, 5016 电源公座, 母头和连接头用端子

详细产品规格 - 请点击 cn.100y.com.tw


Part NO	Product NO	DIM. A
11950	P-5016-N2W20202	5.6
11952	P-5016-N2W20402	9.8
14561	P-5016-N2W20802	18.2
11951	P-5016-N2W20802	26.6
6114	P-5016-N2W22002	43.4
14560	P-5016-N2W22402	51.8

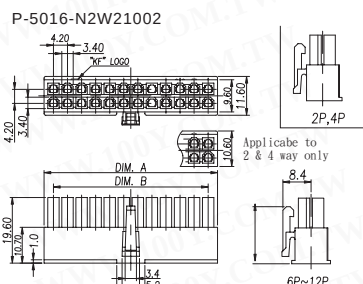

NTTES:
● MATERIAL: NYLON 66 UL94V-0




Part NO	Product NO	DIM. A
15910	MIFSM-202T1W041	9.8

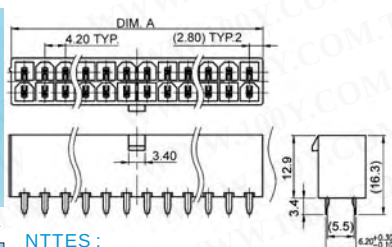

NTTES:
● MATERIAL: NYLON 66 + BRASS
● FINISH: TIN PLATED




NTTES:
● MATERIAL: NYLON 66 + BRASS
● FINISH: TIN PLATED OR GOLD PLATING

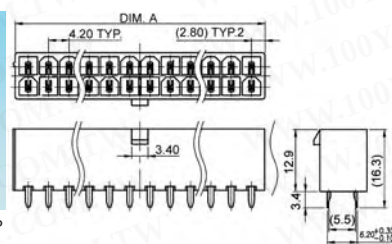

G17-06P-R




Part NO	Product NO	DIM. A
11955	MIFRM-202T1W010	5.4
11956	MIFRM-204T1W010	9.6
11957	MIFRM-212T1W010	26.5
11953	MIFRM-218T1W010	39.2
11954	MIFRM-220T1W010	43.4

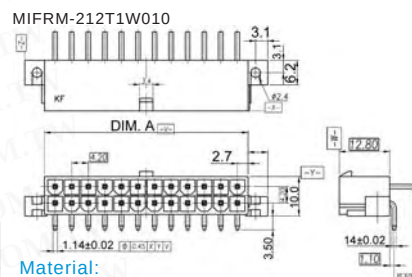

Material:
● Housing: Nylon 66
● Contact: Brass
● Contact plating: Tin-lead 90/10 for all




Part NO	Product NO	DIM. A
12085	MIFSM-204T1W060	9.8
12086	MIFSM-212T1W060	26.7
11947	MIFSM-220T1W060	43.7

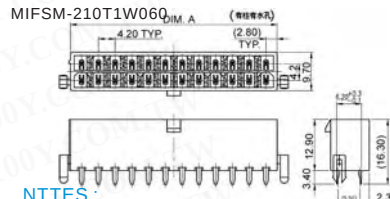

NTTES:
● MATERIAL: INSULATOR: NYLON 66 UL94V-2
● CONTACT: BRASS
● FINISH: TIN PLATED BRASS



NTTES:
● DRAFT ANGLE: 1 MAX

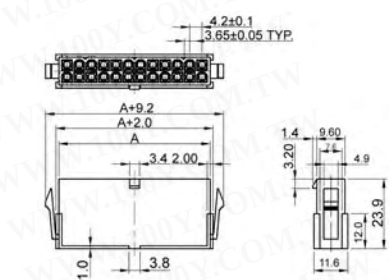


100Y 编号	厂商编号	说明	角度 °	公座/母头	插脚
17167	G17-06P	5015A p:4.2mm 公座-20P-无耳	180°	公座	06P
40101	G17-06P-R	5015A p:4.2mm 公座-06P-无耳	90°	公座	06P
6101	G17-20P	5015A p:4.2mm 公座-20P-无耳	180°	公座	20P
17168	G18-06P	5016A p:4.2mm 母座-20P-无耳	180°	母座	06P
11955	MIFRM-202T1W010	5015TW-90°-耳	90°	公座	2P
11956	MIFRM-204T1W010	5015TW-90°-耳	90°	公座	4P
11957	MIFRM-212T1W010	5015TW-90°-耳	90°	公座	12P
11953	MIFRM-218T1W010	5015TW-90°-耳	90°	公座	18P
11954	MIFRM-220T1W010	5015TW-90°-耳	90°	公座-耳	20P
15910	MIFSM-202T1W041	5015A-180°-耳	180°	公座	2P
12085	MIFSM-204T1W060	5015A-180°-耳	180°	公座	4P
22632	MIFSM-210T1W060	5015A-180°-耳	180°	公座	10P
12086	MIFSM-212T1W060	5015A-180°-耳	180°	公座	12P
11947	MIFSM-220T1W060	5015A-180°-耳	180°	公座	20P
12548	P-5015-N2W202B1	5015RH-母头(空中式)	180°	母头	2P
12549	P-5015-N2W204B1	5015RH-母头(空中式)	180°	母头	4P
15497	P-5015-N2W206B1(有耳)	5015RH-母头(空中式)	180°	母头	6P
16219	P-5015-N2W208B1	5015RH-母头(空中式)	180°	母头	8P
16433	P-5015-N2W210B1	5015RH-母头(空中式)	180°	母头	10P
12550	P-5015-N2W212B1	5015RH-母头(空中式)	180°	母头	12P
12554	P-5015-N2W220B1	5015RH-母头(空中式)	180°	母头	20P
11950	P-5016-N2W20202	5016 公插头 P:4.20mm		公连接头	1*2
11952	P-5016-N2W20402	5016 公插头 P:4.20mm		公连接头	2*2
20433	P-5016-N2W20602	5016 公插头 P:4.20mm		公连接头	2*3
14561	P-5016-N2W20802	5016 公插头 P:4.20mm		公连接头	2*4
23724	P-5016-N2W21002	5016 公插头 P:4.20mm		公连接头	2*5
11951	P-5016-N2W21202	5016 公插头 P:4.20mm		公连接头	2*6
6114	P-5016-N2W22002	5016 公插头 P:4.20mm		(公)空中接头	2*10
14560	P-5016-N2W22402	5016 公插头 P:4.20mm		(公)空中接头	2*12





7011, 7012系列公头/母头和端子

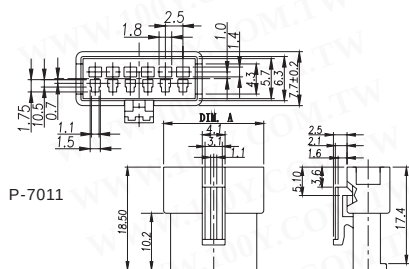


TERMINAL

- MATERIAL: 0.2T BRASS
- PLATING: COPPER-UNDERCOATED, TIN-PLATED,
- WIRE RANGE: SUITABLE FOR AWG #22-#26

HOUSING


- MATERIAL: NYLON 66, UL 94V-0, V-2
- PITCH: 2.5(.098")
- POST: BRASS, 0.64 (.025") SQUARE PIN
- CIRCUITS: 2-18
- RECEPTACLE HOUSING MATES WITH PT 7011
- PLUG HOUSING MATES WITH PT 7012

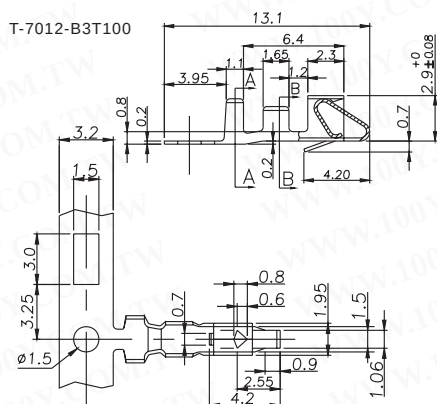

Sec. A-A Sec. B-B

NOTES:

- MATERIAL: BRASS
- FINISH: TIN PLATED
- WIRE GAUGE AWG: 22-28

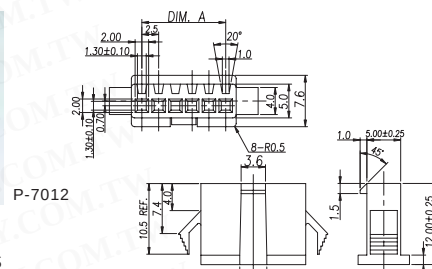
详细产品规格 - 请点击 cn.100y.com.tw

TERMINAL

- MATERIAL: 0.2T BRASS
- PLATING: COPPER-UNDERCOATED, TIN-PLATED,
- WIRE RANGE: SUITABLE FOR AWG #22-#26

HOUSING

- MATERIAL: NYLON 66, UL 94V-0, V-2
- PITCH: 2.5(.098")
- POST: BRASS, 0.64 (.025") SQUARE PIN
- CIRCUITS: 2-18
- RECEPTACLE HOUSING MATES WITH PT 7011
- PLUG HOUSING MATES WITH PT 7012

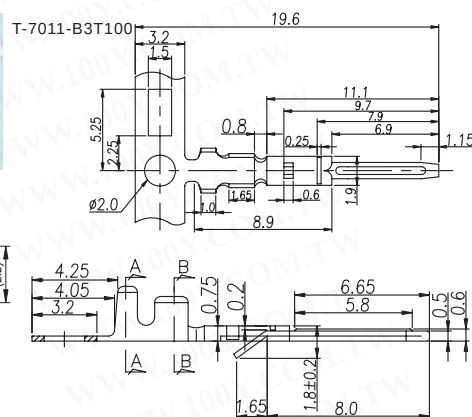


Sec. A-A Sec. B-B

NOTES:

- MATERIAL: C2680-H
- FINISH: TIN PLATED
- WIRE GAUGE AWG: 22-26

100Y 编号	厂商编号	说明	插脚	公头/母头	Pitch	接收端/YES	插入端/YES	Packing
27769	P-7011-N2B10200	7011RH 母头	2P	母头	2.5mm	YES	NO	
16918	P-7011-N2B10300	7011RH 母头	3P	母头	2.5mm	YES	NO	
14245	P-7011-N2B10400	7011RH 母头	4P	母头	2.5mm	YES	NO	
14246	P-7011-N2B10600	7011RH 母头	6P	母头	2.5mm	YES	NO	
28678	P-7011-N2B10800	7011RH 母头	8P	母头	2.5mm	YES	NO	
27770	P-7012-N2B10200	7012PH 公头	2P	公头	2.5mm		YES	
27771	P-7012-N2B10300	7012PH 公头	3P	公头	2.5mm		YES	
14248	P-7012-N2B10400	7012PH 公头	4P	公头	2.5mm		YES	
14249	P-7012-N2B10600	7012PH 公头	6P	公头	2.5mm		YES	
28679	P-7012-N2B10800	7012PH 公头	8P	公头	2.5mm		YES	
14247	T-7011-B3T100	7011RH 端子						10,000PCS/R
14250	T-7012-B3T100	7012PH 端子						6,000PCS/R


2.0 φ 7006 公/7005 公/母接头和端子

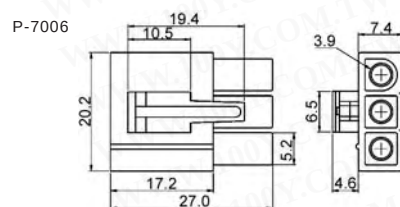

SPECIFICATIONS:

- CURRENT RATING: 15AAC, DC MAX
- VOLTAGE RATING: 300V AC, DC
- TEMPERATURE RANGE: -25°C TO +90°C
- CONTACT RESISTANCE: INITIAL VALUE/10mΩ MAX.
- INSULATION RESISTANCE: 1000MΩ MIN.
- WITHSTANDING VOLTAGE: 1500V AC/MINUTE

100Y 编号	厂商编号	说明	插脚	接收端/YES	插入端/YES
2358	G05-01P	公接头 2.0 φ	1P	NO	YES
2315	G05-02P	7006-2P 公接头 Pitch: 6.2mm	2	NO	YES
2357	G05-03P	7006-3P 公接头 2.0 φ Pitch: 6.2mm	3P	NO	YES
2316	G05-04P	7006-4P Pitch: 6.2mm	4P	NO	YES

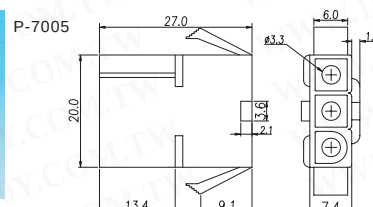详细产品规格 - 请点击 cn.100y.com.tw

TERMINAL

- MATERIAL: 0.25T BRASS
- PLATING: COPPER-UNDERCOATED, TIN-PLATED
- WIRE RANGE: SUITABLE FOR AWG #16-26


HOUSING

- MATERIAL: NYLON 66, UL 94V-0, V-2
- PITCH: 6.2 (.244")
- CIRCUITS: 1, 2, 3, 4, 6, 9, 12, 15
- PLUG HOUSING MATES WITH PT 7006
- RECEPTACLE HOUSING MATES WITH PT 7005



2.0 Φ 7006 公/7005 公/母接头和端子

T-7006-B3T101




SPECIFICATIONS:


- CURRENT RATING: 15AAC, DC MAX
- VOLTAGE RATING: 300V AC, DC
- TEMPERATURE RANGE: -25°C TO +90



T-7006-B3TT00

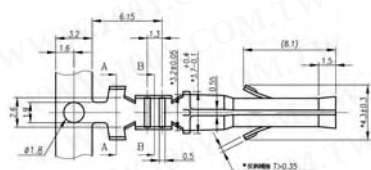

T-7005-B3T101

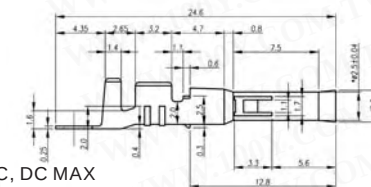


T-7005-B3TT00

100Y 编号	厂商编号	说明	Pins	接收端/YES	插入端/YES	Packing
4465	G05-06P	Pitch:6.2mm	6P	NO	YES	
2318	G06-01P	7005-1P 母接头 Pitch:6.2mm	1P	YES	NO	
2317	G06-02P	7005-2P Pitch:6.2mm	2P	YES	NO	
2362	G06-03P	Pitch:6.2mm	3P	YES	NO	
2319	G06-04P	7005-4P 母接头 Pitch:6.2mm	4P	YES	NO	
2359	G06-06P	Pitch:6.2mm	6P	YES	NO	
39748	P-7005-N2W204B1					
39749	P-7006-N2W20400	7006-4P Pitch:6.2mm	4P	NO	YES	
12922	T-7005-B3T101	公针-低脚镀锡铅	--	--	--	5000PCS/R
39747	T-7005-B3TT00	公针-高脚无铅	--	--	--	3500PCS/R
12547	T-7006-B3T101	7006T2 Brass C2680R-H	母针-低脚镀锡铅	--	--	5000PCS/R
39746	T-7006-B3TT00	母针-高脚无铅	--	--	--	5000PCS/R


详细产品规格 - 请点击 cn.100y.com.tw

T-7005-B3T101



SPECIFICATIONS:

- CURRENT RATING: 15AAC, DC MAX
- VOLTAGE RATING: 300V AC, DC
- TEMPERATURE RANGE: -25°C TO +90

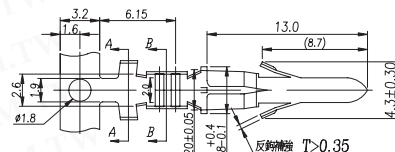

TERMINAL

- MATERIAL: 0.25T BRASS
- WIRE RANGE: SUITABLE FOR AWG #16~26



HOUSING

- MATERIAL: NYLON 66, UL 94V-0, V-2
- CIRCUITS: 1, 2, 3, 4, 6, 9, 12, 15
- RECEPTACLE HOUSING MATES WITH PT 7005
- PLATING: COPPER-UNDERCOATED, TIN-PLATED
- PITCH: 6.2 (.244")
- PLUG HOUSING MATES WITH PT 7006



9007, 9008系列公头/母头和端子



T-9007-B3T103

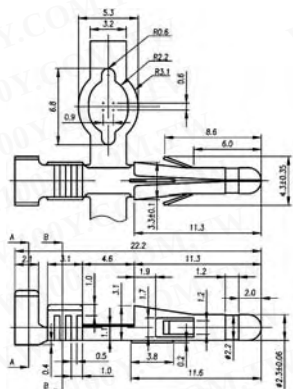

T-9008-B3T100

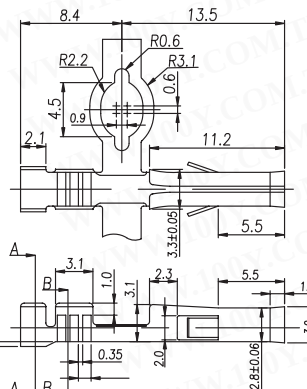

P-9007-N2W10201



P-9008-N2W10301

TERMINAL

- MATERIAL: 0.25T, BRASS
- PLATING: COPPER-UNDERCOATED, TIN-PLATED
- WIRE RANGE: SUITABLE FOR AWG #16~#26

HOUSING

- MATERIAL: NYLON 66, UL 94V-0, V-2
- PITCH 9007P(R)H, 9008P(R)H: 5.03(.198")
- 9007-1P(R)H, 9008-1P(R)H: 6.7(.264")
- CIRCUITS: 1, 2, 3, 4, 5, 6, 9, 12, 15
- RECEPTACLE HOUSING MATES WITH PT 9007
- PLUG HOUSING MATES WITH PT 9008

详细产品规格 - 请点击 cn.100y.com.tw

KINGFONT
You can rely on

100Y 编号	厂商编号	制造厂商	说明	插脚	公头/母头(座)	Pitch	接收端/YES	插入端/YES
24859	P-9007-N2W10201		9007RH Series 母头 2P 无耳	2P	母头	2.36	YES	NO
16794	P-9007-N2W10301		9007RH Series 母头 3P 无耳	3P	母头	2.36	YES	NO
16795	P-9008-N2W10301	KINGFONT	9008PH Series 公头 3P 无耳	3P	公头	2.36	NO	YES
14948	T-9007-B3T103		9007T1 高脚 镀锡铅(18-24AWG) BRASS C2680R-4(公 pin)					
14949	T-9008-B3T100		CONTACT 9008T1 高脚 镀锡铅 BRASS C2680R-H(母 pin)		母头座	2.36	YES	



服务专线: 台湾: 886-3-5753170

传 真: 台湾: 886-3-5753172

E-mail: 台湾: sale@100y.com.tw

深圳: 86-755-83298787

深圳: 86-755-83640655

深圳: 100y@163.com

上海: 86-21-34970699

上海: 86-21-64605107

上海: 100y-1@163.com


10-52



9007, 9008系列公头/母头和端子



P-9007



TERMINAL

- MATERIAL: 0.25T, BRASS
- WIRE RANGE: SUITABLE FOR AWG #16~#26

HOUSING

- MATERIAL: NYLON 66, UL 94V-0, V-2
- CIRCUITS: 1,2,3,4,5,6,9,12, 15

- PLATING: COPPER-UNDERCOATED, TIN-PLATED


- PITCH 9007P(R)H, 9008P(R)H: 5.03(.198")
- RECEPTACLE HOUSING MATES WITH PT 9007

100Y 编号	厂商编号	制造厂商	说明	插脚	公头/母头(座)	Pitch	接收端/YES	插入端/YES
14942	P-9007-N2W102B1		9007 Series 公头 2P 有耳	2P	公头	2.36	NO	YES
14943	P-9007-N2W103B1		9007 Series 公头 3P 有耳公头 2P 有耳公头 2P 有耳	3P	公头	2.36	NO	YES
14944	P-9007-N2W104B1		9007 Series 公头 4P 有耳公头 2P 有耳	4P	公头	2.36	NO	YES
14945	P-9008-N2W10200	KINGFONT	9008 Series 母头 2P 无耳	2P	母头	2.36	YES	NO
14946	P-9008-N2W10300	KINGFONT	9008 Series 母头 3P 无耳	3P	母头	2.36	YES	NO
14947	P-9008-N2W10400	KINGFONT	9008 Series 母头 4P 无耳	4P	母头	2.36	YES	NO

详细产品规格 - 请点击cn.100y.com.tw



P-9008

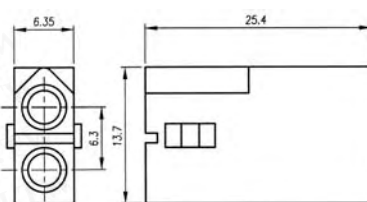


You can rely on

- 9007-1P(R)H, 9008-1P(R)H: 6.7(.264")
- PLUG HOUSING MATES WITH PT 9008

汽车排线-公插/母插




0128B/C



- MATERIAL: NYLON66 UL94V-2
- CURRENT RATING: AC, DC, 10A
- VOLANGE RATING: AC/250V, DC/350V
- WITHSTAND VOLTAGE: 1,000V AC/MINUTE
- TEMPERATURE RANGE: -25°C To +85°C



0130B/C-特殊
0129B/C-特殊

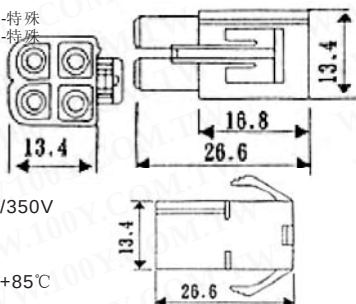

- MATERIAL: NYLON66 UL94V-2
- CURRENT RATING: AC, DC, 10A
- VOLANGE RATING: AC/250V, DC/350V
- WITHSTAND VOLTAGE: 1,000V AC/MINUTE
- TEMPERATURE RANGE: -25°C To +85°C




0131B/C

- P9 POWER EXTENSION CABLES
- VERY HELPFUL WITH TOWER CASES.
- USED TO EXTEND THE POWER SUPPLY MOTHERBOARD CONNECTION.
- THIS IS THE P8/P9 AT TYPE.

详细产品规格 - 请点击cn.100y.com.tw




0129B/C



- MATERIAL: NYLON66 UL94V-2
- RATED VOLTAGE: AC, DC, 250V
- RATED CURRENT: AC,DC, 8A
- INSULATION RESISTANCE: 1,000M MIN.
- WITHSTAND VOLTAGE: 1,500V AC/MIN.
- TEMPERATURE RANGE: -25°C To +85°C




0132B/C



- MATERIAL: NYLON66 UL94V-2
- RATED VOLTAGE: AC, DC, 250V
- RATED CURRENT: AC,DC, 8A
- INSULATION RESISTANCE: 1,000M MIN.
- WITHSTAND VOLTAGE: 1,500V AC/MIN.
- TEMPERATURE RANGE: -25°C To +85°C



0130B/C



- MATERIAL: NYLON66 UL94V-2
- RATED VOLTAGE: AC, DC, 250V
- RATED CURRENT: AC,DC, 8A
- INSULATION RESISTANCE: 1,000M MIN.
- WITHSTAND VOLTAGE: 1,500V AC/MIN.
- TEMPERATURE RANGE: -25°C To +85°C

100Y 编号	厂商编号	说明
7838	0128B/C	2P 汽车排线公插/母座
7839	0129B/C	4P 汽车排线公插/母座
15124	0129B/C-特殊	4P 汽车排线公插/母座 (外壳有勾)
6515	0130B/C	6P 汽车排线公/母插
15125	0130B/C-特殊	6P 汽车排线公插/母座 (外壳有勾)
11164	0131B/C	9P 汽车排线公/母插
10646	0132B/C	12P 汽车排线公插/母座






各式端子线

1. 25mm端子线

详细产品规格－请点击cn.100y.com.tw



规格说明:
Current Rating: 1AAC,DC(AWG 26)
Voltage Rating: 125V AC,DC
Withstand Voltage: 250V AC/Minute
Contact Resistance : 20mΩ Max.
Insulation Resistance : 100MΩ Min.
Temperature Range: -40℃ to +85℃
Applicable PC Board Thickness: 0.8mm



100Y 编号	厂商编号	说明	Pin
21373	M7201001	1.25mm 端子线 45CM	2P
21374	M7201002	1.25mm 端子线 45CM	3P
21375	M7201003	1.25mm 端子线 45CM	4P
21379	M7201004	1.25mm 端子线 45CM	5P
21380	M7201005	1.25mm 端子线 45CM	6P

2. 0mm端子线

详细产品规格－请点击cn.100y.com.tw



I53-PH/E1-450
2.0 母座附线连接器
脚距: 2.0mm 耐压 : AC 250V
耐电流: 0.5A (使用 AWG26# 1007 UL线材)
Pin 数: 2P - 20P
线 45cm 单头



F29 间距: 2.0mm 额定电流: 2A AC、DC
额定电压: 250V AC、DC
温度范围: -25℃ - +85℃
耐压: 800V/min
接触电阻: ≤0.01Ω 绝缘电阻: ≥1000MΩ
适用电线: AWC30#-24#
适用印制板厚度: 1.2-1.6mm

100Y 编号	厂商编号	说明	Pin
28086	F29-02P-10CM	双 7015 母头+端子线	2P
9142	F29-02P-450E	AWG26/45CM 7015 母头+端子线 P:2mm	2P
7668	F29-03P-450E	AWG26/45CM 7015 母头+端子线 P:2mm	3P
7677	F29-04P-450E	AWG26/45CM 7015 母头+端子线 P:2mm	4P
9143	F29-05P-450E	AWG26/45CM 7015 母头+端子线 P:2mm	5P
9266	F29-06P-450E	AWG26/45CM 7015 母头+端子线 P:2mm	6P
7678	F29-07P-450E	AWG26/45CM 7015 母头+端子线 P:2mm	7P
10628	F29-08P-450E	AWG26/45CM 7015 母头+端子线 P:2mm	8P
12422	I53-PH/E1-450	#26 2.0mm 端子线 45CM 单头	




2. 5mm端子线






M7201013
规格说明:
Current Rating: 3AAC,DC(AWG 22)
Voltage Rating: 250V AC,DC
Withstand Voltage: 1500V AC/Minute
Contact Resistance : 10mΩ Max.
Insulation Resistance : 500MΩ Min.
Temperature Range: -25℃ to +85℃



M7201018
规格说明:
Current Rating: 3AAC,DC(AWG 22)
Voltage Rating: 250V AC,DC
Withstand Voltage: 1500V AC/Minute
Contact Resistance : 10mΩ Max.
Insulation Resistance : 500MΩ Min.
Temperature Range: -25℃ to +85℃

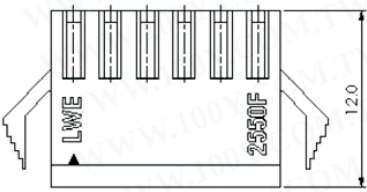



100Y 编号	厂商编号	说明	插脚
22207	M7201009	2550F0200 头 +45CM 线 2.5mm 端子线/2P	2P
22208	M7201010	2550F0200 头 +45CM 线 2.5mm 端子线/3P	3P
22209	M7201011	2550F0400 头 +45CM 线 2.5mm 端子线/4P	4P
22210	M7201012	2550F0500 头 +45CM 线 2.5mm 端子线/5P	5P
22211	M7201013	2550F0500 头 +45CM 线 2.5mm 端子线/6P	6P
23761	M7201014	2550M0200 头 +45CM 线 2.5mm 端子线/6P (22AWG)	2P
23882	M7201015	2550M0200 头 +45CM 线 2.5mm 端子线/6P (22AWG)	3P
23883	M7201016	2550M0200 头 +45CM 线 2.5mm 端子线/6P (22AWG)	4P
23884	M7201017	2550M0200 头 +45CM 线 2.5mm 端子线/6P (22AWG)	5P
23885	M7201018	2550M0200 头 +45CM 线 2.5mm 端子线/6P (22AWG)	6P

2. 54mm端子线



说明:
间距: 2.54mm 线数: 1-12
适用线规: AWC28#-22#
适应基板厚度: 1.6mm
温度范围: -25℃ - +85℃
额定电压: 250V AC、DC 额定电流: 3A AC、DC
接触电阻: ≤0.01Ω 绝缘电阻: ≥1000MΩ
耐压: 1000V/min, AC/minute

100Y 编号	厂商编号	说明	Pin	Parking
35132	F03-10P-250E*2	#26 2.54mm 25cm 双头端子线	10P	
15916	F03-12P-400E*2	#26 2.54mm 40cm 双头端子线	12P	
14447	F11-03P-450D*2	#24 XH 3P 45CM 双头	3P	
14448	F11-07P-450D*2	#24 XH 7P 45CM 双头	7P	
23283	F11-12P-450D	AWG24/45CM 9001 母头+端子线	12P	
23653	F11-12P-450D*2	#24 XH 2P 45CM 双头	12P	
14449	F11-16P-450D*2	#24 XH 16P 45CM 双头	16P	
39126	P0924-BF06/XHD01	AWG24/12CM 9001 母头+端子线	6P	
14925	P111-百/B	2.0 10P 穿 8P/2.54 绞线		
			#26 2.54 8P/JAE2.0 10P	2.54mm 端子线



2. 54mm端子线



F29-10P/2.54 8P

主要规格

- Insulator material: NYLON 66(UL 94V-O)
- Wire range: AWG#28~#22
- Rated voltage: 250V
- Rated current: 1A
- Contact resistance: $\leq 0.01 \Omega$
- Insulation resistance: $\geq 1000M \Omega$
- Withstanding voltage: 1000V.AC
- Temp range for usage: -25~85℃
- Relative humidity: 93%+40
- P.C board thickness: 1.6mm

2. 54 母座附线连接器

脚距: 2.54mm
耐压: AC 250V
耐电流: 1A
45CM
双头白, 黑, 红, 黄, 绿, 灰, 蓝, 咖, 紫



I43-XH/D1-450

2. 54 母座附线连接器

脚距: 2.54mm
耐压: AC 250V
耐电流: 1A
45CM
双头白, 黑, 红, 黄, 绿, 灰, 蓝, 咖, 紫



I16-B2-450

2. 54 母座附线连接器

脚距: 2.54mm
耐压: AC 250V
耐电流: 1A
45CM
双头白, 黑, 红, 黄, 绿, 灰, 蓝, 咖, 紫



I50-SH/E1-450_单头

详细产品规格 - 请点击cn.100y.com.tw



3194-5

2. 54 母座附线连接器

脚距: 2.54mm
耐压: AC 250V
耐电流: 1A (使用 AWG24# 1007 UL线材)
Pin 数: 5P
附线40cm 5003端子线

100Y 编号	厂商编号	说明	Pin
7711	3194-10	2.54mm 5003 端子线 40CM-单边	10P
7706	3194-12	2.54mm 5003 端子线 40CM-单边	12P
7705	3194-2	2.54mm 5003 端子线 40CM-单边	2P
8372	3194-3	2.54mm 5003 端子线 40CM-单边	3P
8373	3194-4	2.54mm 5003 端子线 40CM	4P
12761	3194-5	2.54mm 5003 端子线 40CM	5P
9111	3194-6	2.54mm 5003 端子线 40CM-单边	6P
9112	3194-7	2.54mm 5003 端子线 40CM-单边	7P
9113	3194-8	2.54mm 5003 端子线 40CM-单边	8P
28255	3194-9	5003 端子线	9P
7520	F11-02P-450D	AWG24/45CM 9001 母头+端子线	2P
9141	F11-03P-450D	AWG24/45CM 9001 母头+端子线	3P
10629	F11-04P-450D	AWG24/45CM 9001 母头+端子线	4P
7518	F11-05P-450D	AWG24/45CM 9001 母头+端子线	5P
12059	F11-06P-450D	AWG24/45CM 9001 母头+端子线	6P
9979	F11-07P-450D	AWG24/45CM 9001 母头+端子线	7P
10627	F11-08P-450D	AWG24/45CM 9001 母头+端子线	8P
12058	F11-10P-450D	AWG24/45CM 9001 母头+端子线	10P
14302	F29-10P/2.54 8P	#26 PH10P 穿 8P/2.54 8P 绞线	8P
12420	I16-B1-450	#26 2.54mm 端子线 45CM 单头	
12421	I16-B2-450	#26 2.54mm 端子线 45CM 双头白,黑,红,黄,绿,灰,蓝,咖,紫	
12407	I50-SH/E1-450_单头	#26 杜邦超薄镀金_单头端子线 45CM(白,黑,红,黄,绿,灰,蓝,咖,咖啡色)	
12650	I50-SH/E2-450_双头	#26 杜邦超薄镀金_双头端子线 45CM(白,黑,红,黄,绿,灰,蓝,咖,咖啡色)	

3. 96mm端子线



I17-D1-450

3. 96 母座附线连接器 AWG#22

脚距: 3.96mm
耐压: AC 250V
耐电流: 3A (使用 1005 UL线材)
#22 1005 VH 端子线 45CM 单头



I54-VH-450C/15

3. 96 母座附线连接器 AWG#22

脚距: 3.96mm
耐压: AC 250V
耐电流: 3A (使用 1005 UL线材)
#22 1005 VH 端子线 45CM 单头



F26-02P-300C

TERMINAL

- MATERIAL: 0.25T BRASS
- PLATING: COPPER-UNDERCOATED, TIN-PLATED
- HOUSING
- MATERIAL: NYLON 66, UL 94V-0, V-2 WAFER
- TOP ENTRY: ATW-04
- SIDE ENTRY: ATW-04R
- IDT TYPE: AHT-04
- WIRE TO WIRE TYPE: AH-04, ARH-04
- CIRCUITS: 4



3195-2-10CM

3. 96 母座附线连接器 AWG#20

脚距: 3.96mm
耐压: AC 250V
耐电流: 3A (使用 AWG20# 1007 UL线材)
3. 96 7P 40CM(单头)


100Y 编号	厂商编号	说明	插脚
9109	3195-2	3.96mm 端子+线 40CM	2P
28087	3195-2-10CM	3.96mm 端子线	2P
8374	3195-3	3.96mm 端子线 40CM	3P
9108	3195-4	3.96mm 端子线 40CM	4P
8375	3195-5	3.96mm 端子线 40CM	5P
9110	3195-6	3.96mm 端子线 40CM	6P
21979	3195-7	3.96mm 端子线 40CM	7P
16135	F26-02P-300C	#22 5.08mm 30CM 单头	2P
12405	I17-D1-450	#22 3.96mm 端子线 45CM 单头白,黑,红,黄,绿,灰,蓝,咖,紫	
12406	I54-VH-450A	#18 VH 端子线 45CM 单头(白,黑,红,黄,绿,灰,蓝,咖,咖啡)	
13321	I54-VH-450C/15	#22 1015 VH 端子线单头	

6. 35mm端子线



规格说明:

额定电流: 10A AC, DC (AWG 14)
额定电压: 600V AC, DC
承受电压: 5000V AC/Minute
接触电阻: 10mΩ Max.
绝缘电阻: 1000MΩ Min.
温度范围: -55℃ to +105℃
可适用的电脑板厚度: 1.6mm



详细产品规格 - 请点击cn.100y.com.tw

产品名称	Circuits	Dim.A
Housing 6350F0202	2	13.97

100Y 编号	厂商编号	说明	插脚
22189	M7201006	6350F0202 头 +45CM 线 6.35mm 端子线/2P	2P
22190	M7201007	6350F0202 头 +45CM 线 6.35mm 端子线/3P	3P
22191	M7201008	6350F0202 头 +45CM 线 6.35mm 端子线/4P	4P






USB / IEEE 1394连接头/座 USB 连接座(头)



USBBS-00401W003-G

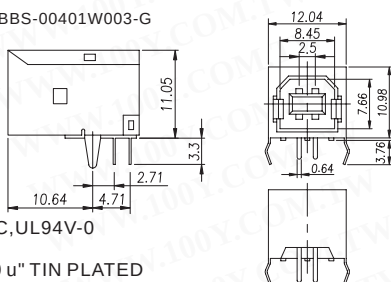**MATERIAL:**


- HOUSING:THERMOPLASTIC,UL94V-0
- CONTACT:COPPER ALLOY
- SHELL:COPPER ALLOY, 100 u" TIN PLATED

SPECIFICATION:

- VOTAGE:30 VAC(R.M.S)
- CURRENT :1.0A MAX. PER PIN
- TEMPERATURE:-55℃~+85℃
- CONTACT RESISTANCE:30 MILLIOHMS MAX.
- INSULATION RESISTANCE:1,000 MEGOHMS MIN.
- DIELECTRIC WITHANDING VOLTAGE:500 VAC



USBAS-00401B012

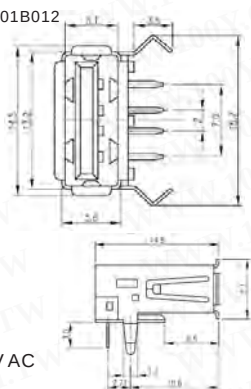**MATERIAL:**


- Housing: thermoplastic, UL94V-0 Standard nylon 66
- Contact :phosphor bronze

SPECIFICATION:

- Current rating : 1Amp
- Insulation Resistance : 100MΩ Min.
- Contact Resistance : 20mΩ Max.
- Dielectric Withstanding Voltage : 500V AC
- Temperature Range : -40°C to +105°C.




USB SERIES A USA-04

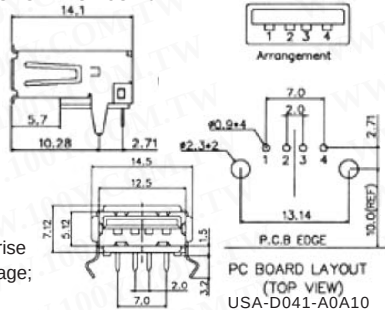**说明:**

Voltage:30V AC(rms)
Current :1A maximum per contact
not to exceed30℃ temperature rise
Temperature :-40℃ to 60℃ storage;
0℃ to 40℃ operating



KS-001MD-A-N-B



UB-23



KS-001-ANW




USB-ADP-AF/AF

USB A Type Female to A Type
Female Adapter
USB ADAPTER for USB A Type
Female to A Type Female

详细产品规格 - 请点击 cn.100y.com.tw



USBAS-00401W003

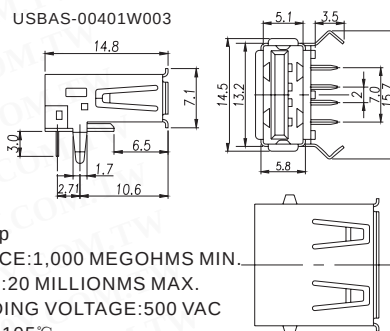**SPECIFICATION:**


- CURRENT RATING:1Amp
- INSULATION RESISTANCE:1,000 MEGOHMS MIN.
- CONTACT RESISTANCE:20 MILLIONMS MAX.
- DIELECTRIC WITHANDING VOLTAGE:500 VAC
- TEMPERATURE:-40℃~+105℃

MATERIAL:

- HOUSING:THERMOPLASTIC,UL94V-0 STANDARD NULON 66
- CONTACT:PHOSPHOR BRONZE




CA-0306-03

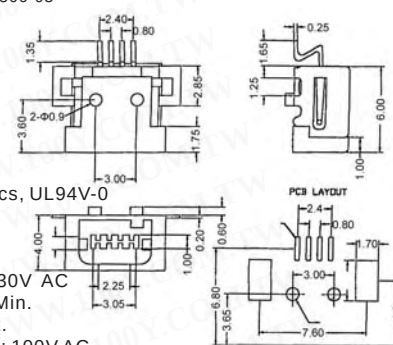**HOUSING :**


High Temperature Thermoplastics, UL94V-0
Color : Black
Contact : Copper Alloy
Shell : Copper Alloy
Voltage Current Rating : 1AMP, 30V AC
Insulation Resistance : 100MΩ Min.
Contact Resistance : 50mΩ Max.
Dielectric Withstanding Voltage : 100V AC
Temperature Range : -50°C to +85°C.



KS-002K-A1-N-W

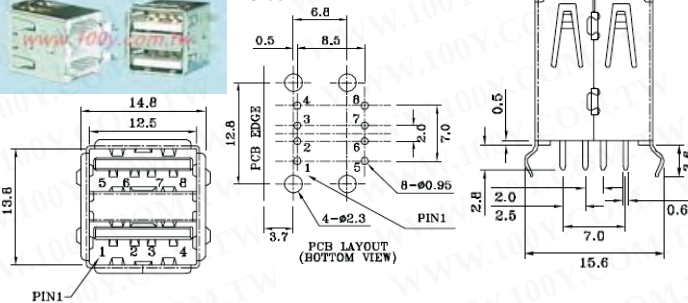

CA-0305-00

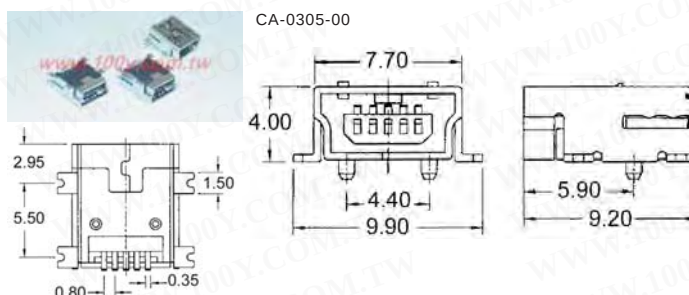

100Y 编号	厂商编号	制造厂商	说明
13966	CA-0305-00		Mini USB 5PIN Socket
13964	CA-0306-03		Mini USB 4PIN Socket SU* SMT
28166	KS-001-ANW		USB Jack DIP 90° 4P 母
18931	KS-001MD-A-N-B		USB Jack (DIP)
18932	KS-002K-A1-N-W		USB Jack DIP (180°) 双层
28099	UB-23	SCE	USB 转接头 A 母-A 母
22041	USB SERIES A USA-04		USB-A SMT 04P/ 2.0
17582	USB-ADP-AF/AF		USB 转接头(A 母/A 母)
16916	USBAS-00401B012		USB CONNECTOR SERIES
2353	USBAS-00401W003		USB CONN 4P A 型
39295	USBBS-00401W003-G		USB CONN 4P B 型-RoHS









IEEE 1394 连接座(头)

详细产品规格 - 请点击 cn.100y.com.tw





312-SO4CR2

说明:

Voltage: 5.0V Current: 0.5A
Contact Resistance: Terminal-50MΩ Max
Shell-50MΩ Max
Temperature: -25°C to 85°C



IEECR-00603B003



MATERIAL:

●SHELL: COPPER ALLOY.

ELECTRICAL CHARACTERISTICS:

●CURRENT RATING: 1 AMP.

●CONTACT RESISTANCE: 20 MILLIOHMS MAX.

●HOUSING: THERMOPLASTIC UL94V-0 RATED.

●INSULATION RESISTANCE: 1000 MEGOHMS MIN.

●DIELECTRIC WITHSTANDING: AC 500V FOR 1 MINUTES.

●CONTACT: BRONZE.

500V DC FOR 1 MINUTES.

●OPERATING TEMPERATURE: -40°C TO +105°C



100Y 编号	厂商编号	说明
13965	312-SO4CR2	IEEE 1394 4PIN Socket SMT SMT
12082	IEECR-00603B003	IEEE-1394 DIP 6P 30u" GOLD PLATING


FPC/FFC连接座/线

FPC/FFC SMT90

上接式连接头



FPCTF-T50T1B000

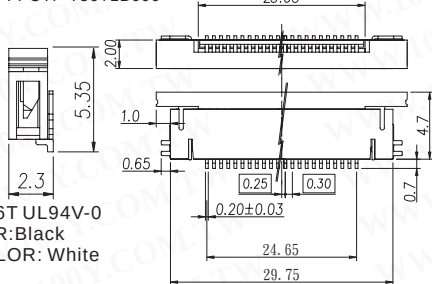

Specifications

Material & Finish

●Housing Material: Nylon 6T UL94V-0

COLOR: Black

●Slider: PPA UL94V-0/COLOR: White

Electrical Performance:

●Rated current: 0.5A

●Rated voltage: 50 VDC

●Contact Resistance: 30Ω max.


●Insulation Resistance: 100MΩ min.

●Dielectric Withstanding Voltage: AC 250V/60sec.

●Operating Temperature: -30 to +85



FPCTF-T26T1W000

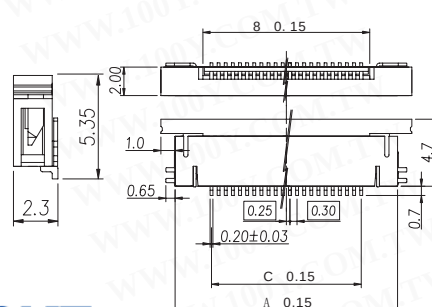

KINGFONT
You can rely on

100Y 编号	厂商编号	制造厂商	说明	Type	Contacts	Pitch (mm)
29220	FPCTF-T16T1W000	KINGFONT	0.5mm Pitch ZIF Mode Horizontal Type Top Entry	SMT 90°	16P-卧上接	0.5
29221	FPCTF-T20T1W000	KINGFONT	0.5mm Pitch ZIF Mode Horizontal Type Top Entry	SMT 90°	20P-卧上接	0.5
29222	FPCTF-T24T1W000	KINGFONT	0.5mm Pitch ZIF Mode Horizontal Type Top Entry	SMT 90°	24P-卧上接	0.5
18805	FPCTF-T26T1W000	KINGFONT	0.5mm Pitch ZIF Mode Horizontal Type Top Entry	SMT 90°	26P-卧上接	0.5
29223	FPCTF-T30T1W000	KINGFONT	0.5mm Pitch ZIF Mode Horizontal Type Top Entry	SMT 90°	30P-卧上接	0.5
12855	FPCTF-T50T1B000	KINGFONT	0.5mm Pitch ZIF Mode Horizontal Type Top Entry	SMT 90°	50P-卧上接	0.5




FPC/FFC SMT90

下接式连接头

详细产品规格 - 请点击 cn.100y.com.tw

FPCTF-B30T1B000

- Rated current: 0.5A
- Rated voltage: 50 VDC
- Contact Resistance: 30MΩ max. (at 20mVDC, 100mA max.)
- Insulation Resistance: 100MΩ min. (at 500 VDC)
- Dielectric Withstanding Voltage: AC 250V / 60sec. (Leak current must be 1mA max.)
- Operating Temperature: -30°C to +85°C



100Y 编号	厂商编号	说明	类型	Contacts	Pitch (mm)
12726	FPCTF-B16T1B000	FPC ZIF SMT 90° 下接式连接头	SMT 90 度	16P--卧下接	0.5mm
12732	FPCTF-B20T1W000	FPC ZIF SMT 90° 下接式连接头	SMT 90 度	20P--卧下接	0.5mm
12731	FPCTF-B24T1B000	FPC ZIF SMT 90° 下接式连接头	SMT 90 度	24P--卧下接	0.5mm
12733	FPCTF-B26T1W000	FPC ZIF SMT 90° 下接式连接头	SMT 90°	26P--卧下接	0.5mm
12544	FPCTF-B30T1B000	FPC ZIF SMT 90° 下接式连接头	SMT 90°	30P--卧下接	0.5
22559	FPCTF-B33T1WC00	FPC ZIF SMT 90° 下接式连接头	SMT 90°	33P--卧下接	0.5
12854	FPCTF-B50T1B000	FPC ZIF SMT 90° 下接式连接头	SMT 90°	50P--卧下接	0.5



服务专线: 台湾: 886-3-5753170

传 真: 台湾: 886-3-5753172

E-mail: 台湾: sale@100y.com.tw

深圳: 86-755-83298787

深圳: 86-755-83640655

深圳: 100y@163.com

上海: 86-21-34970699

上海: 86-21-64605107

上海: 100y-1@163.com

10-57



FPC/FFC SMT90 下接式连接头




47326-0342010N

MATERIAL:

Housing: LCP With GF. UL 94V-0.
Actuator: PPS With GF. UL 94V-0.
Contact: Phosphor Bronze.
Mounting Leg: Brass.

FINISH:

Contact: Tin/Lead over Nickel Plating.
Mounting Tab: Tin/Lead over Nickel Plating.
SPECIFICATION:
Current Rating: 0.4A Max.
Voltage Rating: 50V Max.
Dielectric Withstanding Voltage: 200Volts AC.



FPCTF-T50TTWC00

Specifications

Housing material :
Nylon 6T UL94V-0/color: black
Slider : PPA UL94V-0/Color : white


详细产品规格 - 请点击cn. 100y.com.tw



Specifications

Housing material :
Nylon 6T UL94V-0/color: black
Slider : PPA UL94V-0/Color : white
Electrical performance:
Rated current : 0.5A
Rated voltage : 50VDC
Contact resistance : 30Ω max
(at 20mVDC, 100mA max)
Insulation resistance : 100MΩ min .9
(at 500 VDC)
Dielectric withstanding voltage : AC 250V/ 60SEC
(leak current must be 1mA max)
Operating temperature : -30℃ to +85℃

FPCTF-B30T1W000

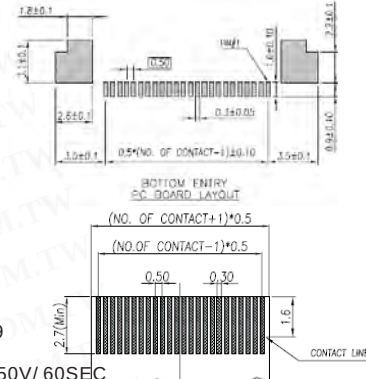

100Y 编号	厂商编号	制造厂商	说明	类型	Contacts	Pitch (mm)
19721	47326-0342010N	TOP YANG	FPC-26 0.5 SMT-R/A 下接 R/A 下接-ZIF-管	SMT	26P	0.5
29273	FPCTF-B30T1W000	KINGFONT	0.5mm Pitch ZIF Mode Horizontal Type Top Entry	SMT 90°	30P-卧下接	0.5
38712	FPCTF-B32T1W000	KINGFONT	0.5mm Pitch ZIF Mode Horizontal Type Top Entry	SMT 90°	32P-卧下接	0.5
35713	FPCTF-B33T1W000	KINGFONT	0.5mm Pitch ZIF Mode Horizontal Type Top Entry	SMT 90°	33P-卧下接	0.5
29274	FPCTF-B50T1W000	KINGFONT	0.5mm Pitch ZIF Mode Horizontal Type Top Entry	SMT 90°	50P-卧下接	0.5
40505	FPCTF-B50TTWC00		0.5mm Pitch ZIF Mode Horizontal Type Top Entry	SMT 90°	50P-卧下接	0.5
40508	FPCTF-T50TTWC00		0.5mm Pitch ZIF Mode Horizontal Type Top Entry	SMT 90° 上	50P TOP ENTRY TUBE	0.5

FPC/FFC 软排线



FFC-24P-0.5mm-220mmL

产品描述:

绝缘材料: PVC
工作温度: 80℃, 105℃
工作电压: 30V, 60V, ...
耐燃测试: VW-1



FFC-26P-1.0mm-120mmL

产品描述:

绝缘材料: PVC
工作温度: 80℃, 105℃
工作电压: 30V, 60V, ...
耐燃测试: VW-1

100Y 编号	厂商编号	说明	类型	Contacts	Pitch/Length (mm)
17131	FFC-16P-1.0mm-220mmL	软盘排线 80C/30V	F.F.C. AWM 2896	16P	1.0220mm
17132	FFC-20P-1.0mm-220mmL	软盘排线 80C/30V	F.F.C. AWM 2896	20P	1.0/220mm
36449	FFC-20P-1.0mm-400mmL	软盘排线	F.F.C. AWM 2896	20P	1.0/400mm
39458	FFC-20P-1.0mm-500mmL	软盘排线	F.F.C. AWM 2896	20P	1.0/500mm
17129	FFC-24P-0.5mm-220mmL	软盘排线 80C/60V	F.F.C. AWM 2896	24P(正/反)	0.5/220mm
17128	FFC-24P-0.5mm-250mmL	软盘排线 80C/60V	F.F.C. AWM 2896	24P	0.5/250mm
22757	FFC-24P-0.5mm-350mmL	软盘排线 80C/30V	F.F.C. AWM 2896	24P	1.0/360mm
20485	FFC-26P-1.0mm-120mmL	软盘排线 80C/30V	F.F.C. AWM 2896	16P	1.0/120mm
23307	FFC-30P-0.5mm-100mmL	软盘排线 80C/30V	F.F.C. AWM 2896	30P	1.0/100mm
17127	FFC-30P-0.5mm-250mmL	软盘排线 80C/60V	F.F.C. AWM 2896	30P	0.5/250mm
28831	FFC-50P-0.5mm-200mmL	软盘排线 80C/60V	F.F.C. AWM 2896	50P	0.5/200mm
17130	FFC-50P-0.5mm-200mmL	软盘排线 80C/60V	F.F.C. AWM 2896	50P(正/反)	0.5/200mm
15920	HV4*030A0300MM	软盘排线	FFC (软性排线)	30P	1.25mm

DVI型-连接头/座

DVI 插板式连接头

详细产品规格 - 请点击cn. 100y.com.tw



CA-24DVIPI-A



CA-29DVIPI-A

SPECIFICATIONS


Meets:DDWG's DVI specification
ENVIRONMENTAL
Temperature Range:-20℃ to +85℃

MECHANICAL

Insulator Material:Glass-filled thermoplastic,black, UL94V-0
Shell Material:Steel
Contact Material: Brass
Contact Plating: Gold Flash

ELECTRICAL

Current Rating: 1.5 AMP
Insulation Resistance:1000 Megohms Min.
Dielectric Withstanding:500V AC (rms)
Contact Resistance:20 Milliohms max
Consult factory for additional plating options

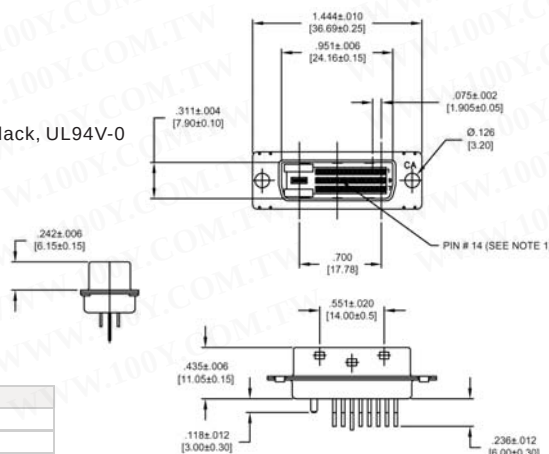

100Y 编号	厂商编号	说明	角度	公、母座	Pins
13962	CA-24DVIPI-A	DVI 插板式连接头	180°	公座	24P
13963	CA-29DVIPI-A	DVI 插板式连接头	180°	公座	29P



DVI 插板式连接头

详细产品规格 - 请点击 cn.100y.com.tw




CA-24DVISDR-A-2-Z



CA-29DVISIR-A

NOTES:
1. FOR SPECIFICATION AND PERFORMANCE CHARACTERISTICS SEE CA DWG 10025
2. ENVIRONMENTAL:
TEMPERATURE RANGE -20C TO +85C
3.ELECTRICAL:
RATED: 1.5A @ 40V AC (rms)
CONTACT RESISTANCE: 20 MILLIOHMS MAXIMUM
INSULATION RESISTANCE: 1000 MEGOHMS MINIMUM
DIELECTRIC WITHSTANDING VOLTAGE: 500V AC (rms)
4.MECHANICAL:
MATING FORCE: 10 LB. [4.5 kg] MAXIMUM
UNMATING FORCE: 2.2 LB. [1 kg] MINIMUM, 8.8 LB. [4 kg] MAXIMUM
5.MATERIAL:
HOUSING: GLASS FILLED THERMOPLASTIC, NATURAL, UL 94V-0
CONTACT: PHOSPHOR BRONZE
SHELL: ZINC ALLOY, NICKEL PLATED
BOARD LOCK: COPPER ALLOY, TIN PLATE

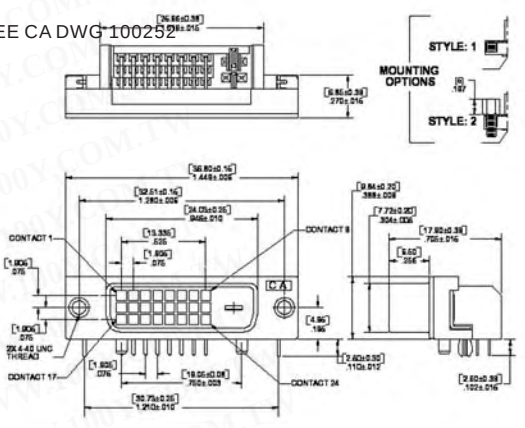


100Y 编号	厂商编号	说明	角度	公、母座	Pins
13961	CA-24DVISDR-A-2-Z	DVI 插板式连接头	90°	母座	24P
13960	CA-29DVISIR-A	DVI 插板式连接头	90°	母座	29P

Weidmuller_ T型接头 Weidmuller_ T型接头



Temperature Range: -40°C to +85°C
Type of protection: IP 66
Enclosure material: high-quality aluminium alloy(AL-SI 12)
Surface finish: painted,RAL 7001
Profibus PA connection: tension spring clip,0.5-1.5mm
Cable entry : M16 screwed cable gland
Clamping range: 5.5-9.5mm

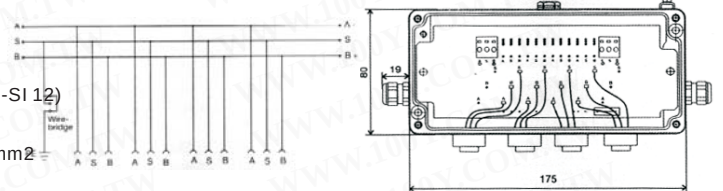


100Y 编号	厂商编号	制造厂商	说明
32000	8564260000	Weidmuller	T 型接头

其它类连接头 / 座 其它类-连接器

详细产品规格 - 请点击 cn.100y.com.tw



0-206043-1

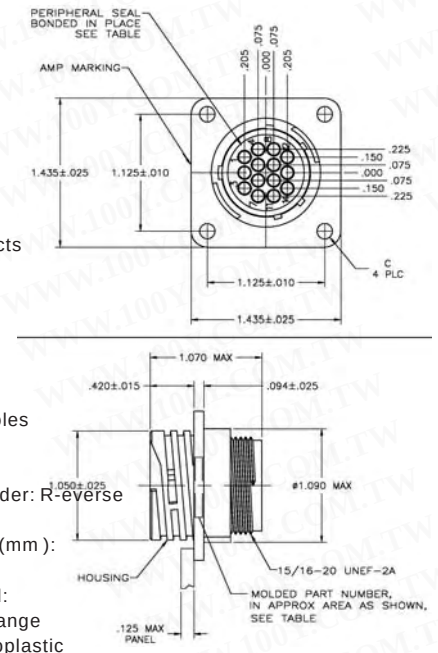


- Searchable Features:**
- Gender: Receptacle
 - Used With: Socket Contacts
 - Preloaded: No
 - Terminate To: Wire
 - Shell Size: 17
 - Shell Type: All Plastic
 - Product Series: Series 1
 - Reverse Numbering: No
 - Mount Style: Mounting Holes
 - Sealed: No
 - VDE Tested: No
 - Standard or Reverse Gender: R-verse
- Other Properties:**
- Wire Insulation Diameter (mm): 2.54mm
 - Panel Attachment Method: Square Flange
 - Housing Material: Thermoplastic
 - Housing Color: Black
 - Housing Material Flammability Rating: UL 94V-0v
 - Keying: A



0-066181-1

- Searchable Features:**
- Pin/Socket: Socket
 - High Current: No
 - Packaging Method: Loose Piece
 - Wire Range (mm [AWG]): 0.80- 1.402 [18-16]
 - Contact Material: Copper Alloy
 - Termination End Plating: Gold
 - Product Type: Type III+
 - Contact Size: 16
 - Contact Type: Signal
 - Terminate To: Wire
 - Insulation Support: Yes
 - Wire Termination Type: Solder
- Other Properties:**
- Pin Diameter (mm): 1.57
 - Wire/Cable Type: Discrete Wire
 - Test Current (Amps.): 13.0
 - Spring Material: Stainless Steel
 - Grade: Commercial
 - Used With: M Series Connectors, CPC Connectors.
 - Extraction Tool: 305183

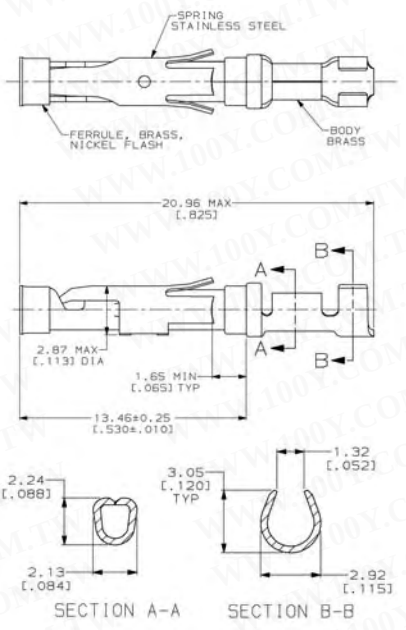


100Y 编号	厂商编号	制造厂商	说明	类型	Pins
12905	0-066181-1		母连接头 14P之 PIN 脚		
12831	0-206043-1		母连接头 14P		14P




其它类-连接器




说明
FCN-3659040-AU
Voltage Rating AC 250V
Contact resistance:15mΩ max.

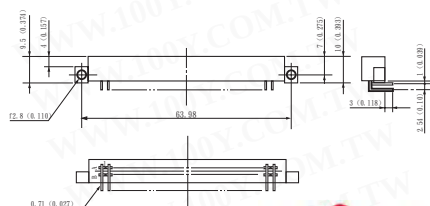


NOTES:
Cover:sus 304,T=0.3mm
Heaver:sus304,T=0.3mm
Ejector : hige temperature plastic UL94V-0 color=black

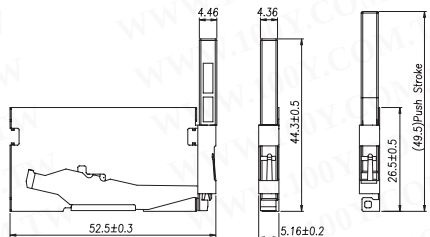

HR10A-10R-12SB

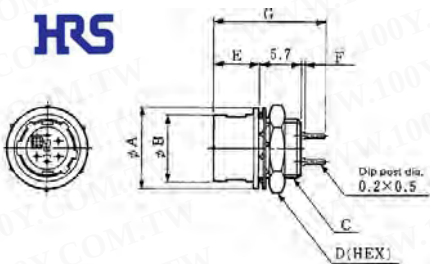

HR10A-10R-10PB

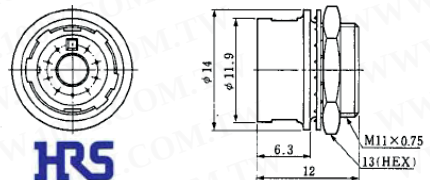

S-1660+1660CA+1660-STA




CHM-6021




0-0177766-1




SDAMB-01215BT00

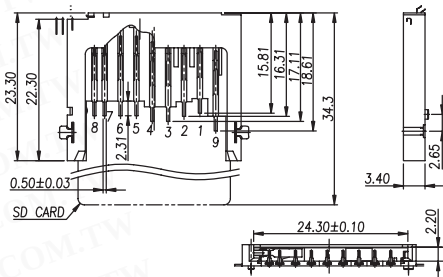


CFCMD-35T15W110

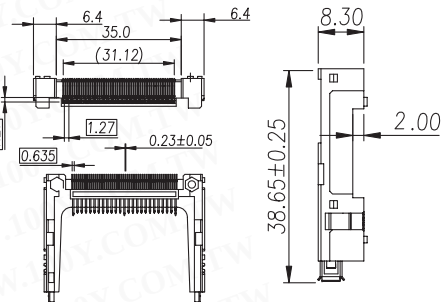

HR10A-10R-10SB

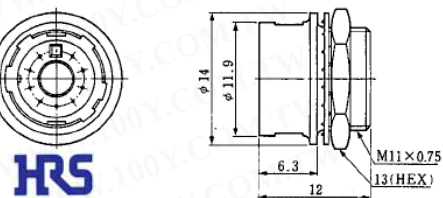

HR10A-7R-6SB

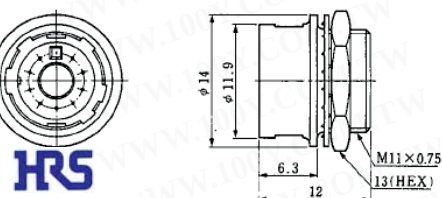

Other properties:

RoHS/ELV compliance History: Always was RoHS compliant
Insulation Diameter(mm[in]):1.00-1.90[.039-.075]
Housing material : nylon
Contact material : brass
Contact mating Area plating : tin
Length(mm[in]): 12.00[0.472]
Width (mm[in]): 11.00[0.433]
Height (mm[in]): 7.00[0.275]
Wire type: thin

100Y 编号	厂商编号	制造厂商	说明	类型	Pins	Parking	插入端/YES	接收端/YES	材质
32107	0-0177766-1	AMP	TAP Cable Connector/Splice	Cable Connector/Splice					Nylon,Bras s
13192	FCN-3659040-AU	FUJITSU	40P 90 度双排连接头	90 度	40P				
14537	CFCMD-35T15W110	KINGFON T	Compact Flash Type II Stand Off 2.0mm Normal Type	0.635mm PITCH	50P				
19491	CHM-6021	PLT	4P 母插头						
19490	CHM-6021A	PLT	4P 公插头						
27741	HR10A-10R-10PB	HRS	CIRCULAR CONNECTOR	Solder Type	10P 公头		NO	YES	
23323	HR10A-10R-10SB	HRS	CIRCULAR CONNECTOR	Solder Type	10P female		NO	YES	
27742	HR10A-10R-12SB	HRS	CIRCULAR CONNECTOR	Solder Type	12P female		NO	YES	
27740	HR10A-7R-6SB	HRS	CIRCULAR CONNECTOR	Solder Type	6P female		NO	YES	
14538	K-CFCI-02		CFCMD-35015W110 之 推杠	CFCMD-35015W110 之 推杠					
12088	S-1660+1660CA+1660- STA		焊线式接头 3 件/一组	1660	60				
15295	SDAMB-01215BT00	KINGFON T	Secure Digital Card Connector Type II	GOLD PLATING 黑色	12Pin				





HONDA_连接器(外盖) **HONDA**


详细产品规格 - 请点击 cn.100y.com.tw



MR-8F
General Information
Manufacturer : Honda communications
Item# : MR-8F-hnda
Description : connector
Additional Specifications
Item category : Connector





MR-20RMA




MR-34M

General Information
Manufacturer : Honda communications
Item# : MR-20M-hnda
Description : connector , insert 20 pin mstr solder cup
Additional Specifications
Item category : Connector

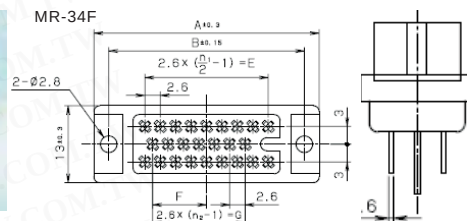

MR-20L

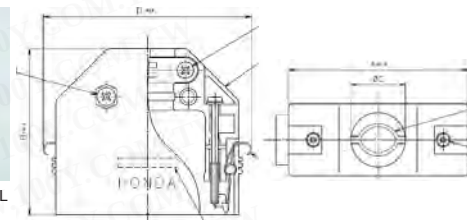

100Y 编号	厂商编号	制造厂商	说明	类型	Pins/角度	插板/焊线式	公/母-头/座
14075	MR-20F	HONDA Connectors	HONDA_20P 母焊线头 ROHS	MR-()F	20P/180°	焊线	母头
14076	MR-20L	HONDA Connectors	HONDA_20P 外壳 ROHS	MR-()L			
14073	MR-20M	HONDA Connectors	HONDA_20P 公焊线头 ROHS	MR-()M	20P/180°	焊线	公头
14078	MR-20RMA	HONDA Connectors	HONDA_20P 公座插板式 90° ROHS	MR-()RMA	20P/90°	插板式	公座
39116	MR-34F	HONDA Connectors	HONDA_34P 母焊线头 ROHS	MR-()F	34P/180°	焊线	母头
39119	MR-34L	HONDA Connectors	HONDA_34P 外壳 ROHS	MR-()L			
39117	MR-34M	HONDA Connectors	HONDA_34P 公焊线头 ROHS	MR-()M	34P/180°	焊线	公头
39121	MR-50F	HONDA Connectors	HONDA_20P 母焊线头 ROHS	MR-()F	50P/180°	焊线	母头
39120	MR-50L	HONDA Connectors	HONDA_50P 外壳 ROHS	MR-()L			
39118	MR-50M	HONDA Connectors	HONDA_50P 公焊线头 ROHS	MR-()M	50P/180°	/焊线	公头
14077	MR-8F	HONDA Connectors	HONDA_8P 母焊线头	MR-()F	8P/180°	焊线	母头


ERNI_连接器




详细产品规格 - 请点击 cn.100y.com.tw




Termination: Pressfit
Pins: 110
RoHS Compliant: Yes

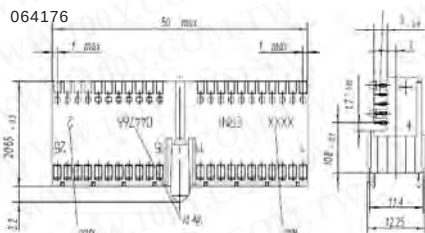


Termination: Pressfit
Pins: 133
RoHS Compliant: Yes

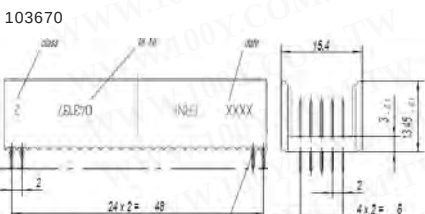

Termination: Pressfit
Pins: 110
RoHS Compliant: Yes

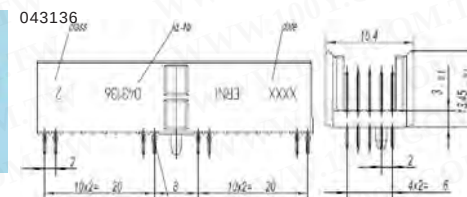

Termination: Pressfit
Pins: 95
RoHS Compliant: Yes

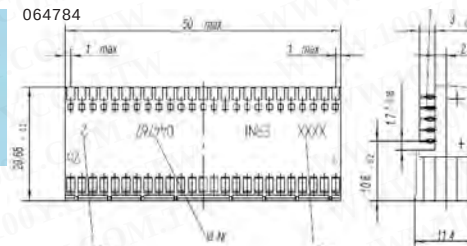

100Y 编号	厂商编号	制造厂商	说明	Pins/角度	公/母-头/座	Type
34425	043136	ERNI	ERNI_连接器	110P	Male	Type A
30047	064176	ERNI	ERNI_型连接器	110P	公座	Type A
30151	064784	ERNI	ERNI_连接器	95P	公座	B
30150	064785	ERNI	ERNI_型连接器	110P	公座	Type B
30182	103670	ERNI	ERNI_连接器	133P	公座	B
30177	914796	ERNI	ERNI_连接器	154P	公座	Type B
30152	923190	ERNI	ERNI_连接器	154P	母头	A




AMP_公座+母座+端子



详细产品规格－请点击cn.100y.com.tw



1-0640508-0

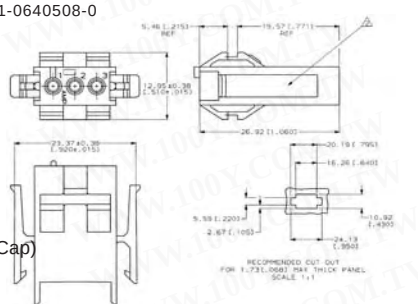

Searchable Features:

- Centerline, Matrix (mm [in]): 4.19 [.165]
- Contact Layout: In-Line
- Housing Type: Receptacle (Cap)


Other Properties:

- Housing Material: Nylon
- Lock Type: Positive Lock
- Voltage (VAC): 250
- Housing Flammability Rating: UL 94V-0





1-0640518-0

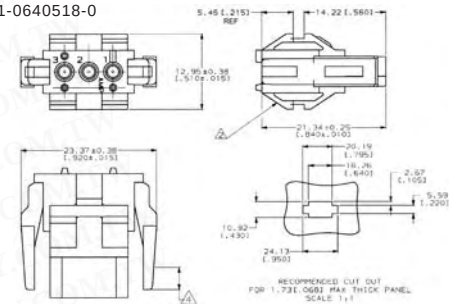

Searchable Features:

- Centerline, Matrix (mm [in]): 4.19 [.165]
- Contact Layout: In-Line
- Housing Type: Plug


Other Properties:

- Housing Material: Nylon
- Lock Type: Positive Lock
- Voltage (VAC): 250
- Housing Flammability Rating: UL 94V-0





0-0058074-1

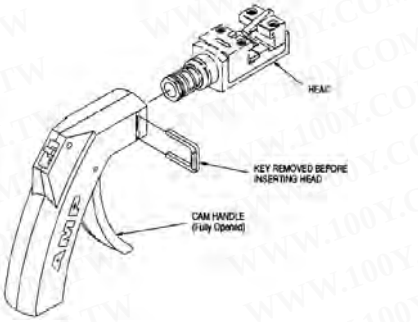

Searchable Features:

- Centerline, Matrix (mm [in]): 4.19 [.165]
- Contact Layout: In-Line
- Housing Type: Plug


Other Properties:

- Housing Material: Nylon
- Lock Type: Positive Lock
- Voltage (VAC): 250
- Housing Flammability Rating: UL 94V-0





F964736

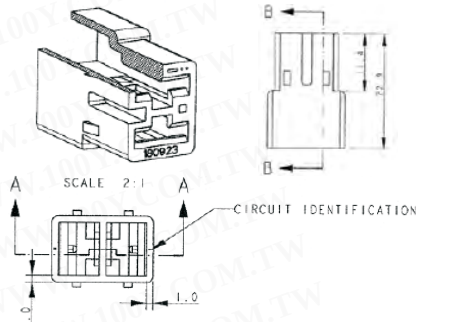

Searchable Features:

- Centerline, Matrix (mm [in]): 4.19 [.165]
- Contact Layout: In-Line
- Housing Type: Plug


Other Properties:

- Housing Material: Nylon
- Lock Type: Positive Lock
- Voltage (VAC): 250
- Housing Flammability Rating: UL 94V-0





0-0350967-1

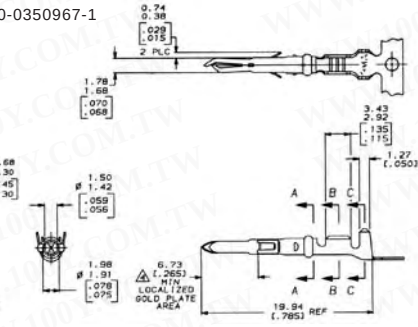

Searchable Features:

- Centerline, Matrix (mm [in]): 4.19 [.165]
- Contact Layout: In-Line
- Housing Type: Plug


Other Properties:

- Housing Material: Nylon
- Lock Type: Positive Lock
- Voltage (VAC): 250
- Housing Flammability Rating: UL 94V-0





0-0641294-1

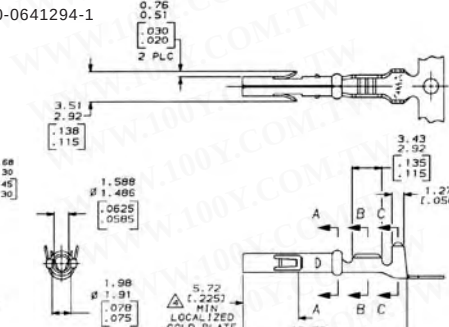

Searchable Features:

- Centerline, Matrix (mm [in]): 4.19 [.165]
- Contact Layout: In-Line
- Housing Type: Plug


Other Properties:

- Housing Material: Nylon
- Lock Type: Positive Lock
- Voltage (VAC): 250
- Housing Flammability Rating: UL 94V-0





640456-6

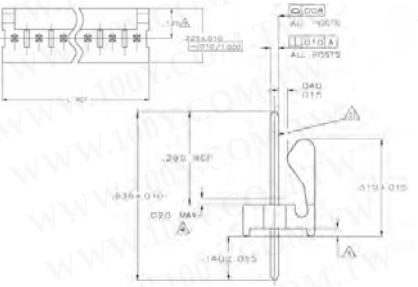

Searchable Features:

- Centerline, Matrix (mm [in]): 4.19 [.165]
- Contact Layout: In-Line
- Housing Type: Plug


Other Properties:

- Housing Material: Nylon
- Lock Type: Positive Lock
- Voltage (VAC): 250
- Housing Flammability Rating: UL 94V-0





58246-1

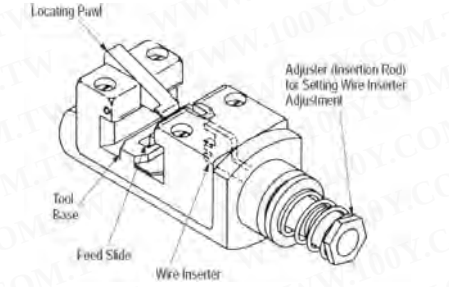

Searchable Features:

- Centerline, Matrix (mm [in]): 4.19 [.165]
- Contact Layout: In-Line
- Housing Type: Plug

Other Properties:

- Housing Material: Nylon
- Lock Type: Positive Lock
- Voltage (VAC): 250
- Housing Flammability Rating: UL 94V-0




100Y 编号	厂商编号	制造厂商	说明	Pins/角度	公/母-头/座	类型
23854	0-0058074-1	AMP	MTA-100 Connectors 腔式嵌拉			
28272	0-0350967-1	AMP	1-064508-0 昭鼠 Pin			镀锡铅
28273	0-0641294-1	AMP	1-064518-0 昭谱 Pin			镀锡铅
15115	0-0641294-1	AMP	1-640518-0 昭谱 Pin			镀锡铅
17503	1-0640507-0	AMP	AMP_ 蛭谈?	2P	母接头	
30154	1-0640509-0	AMP	AMP_ 蛭谈?	4P	母接头	
32032	1-0640510-0	AMP	AMP_ 蛭谈?	6P	母接头	
32033	1-0640511-0	AMP	AMP_ 蛭谈?	9P	母接头	
30216	1-0640517-0	AMP	AMP_ 蛭谈?	2P	公接头	
32031	1-0640519-0	AMP	AMP_ 蛭谈?	4P	公接头	
32288	1-0640520-0	AMP	AMP_ 蛭谈?	6P	公接头	
32034	1-0640521-0	AMP	AMP_ 蛭谈?	9P	公接头	
24672	58246-1	AMP	0-640442-6 腔脚谈笋			
40334	640456-6	AMP	6P MTA 100 Header	6P		MAT-100
23483	F964736	AMP	'Fastin-Faston' HOUSING		Male	2WAY



AMP_公座+母座+端子

AMP

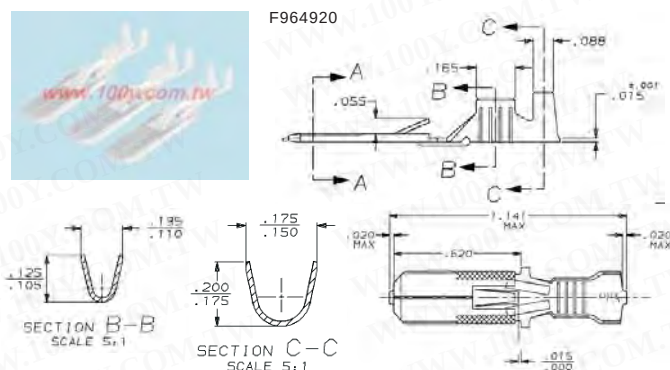


3-640429-6

Other properties

Cable exit angle : 90
Housing flammability rating : UL-94V-2
Housing material : Nylon
Current rating(Amps.):7
Mating connector lock type : locking ramp
Voltage rating (VAC): 600




180924-0

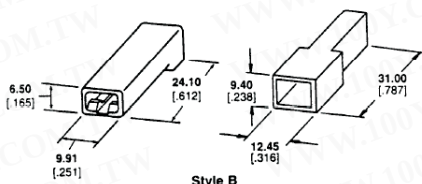

0-0640545-2

The Multimate Enhanced High Current Type III+ stamped and formed contact system provides a significant improvement in current carrying capability over our current Type III+ contact. This new contact system has a slightly different contact material, but is identical to our current Type III+ offering in size and will work in all Multimate connector housings.

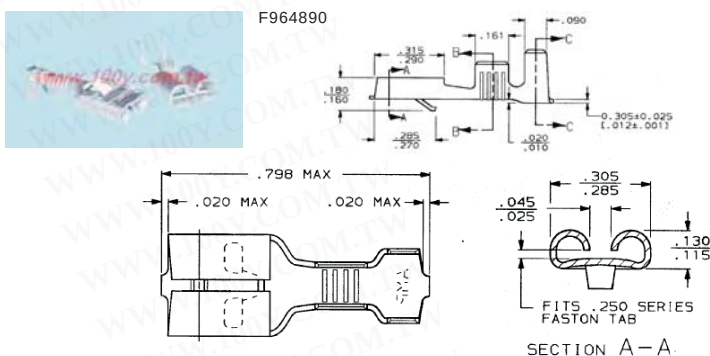详细产品规格 - 请点击 cn.100y.com.tw


3-640442-3

Other properties

Cable exit angle : 90
Housing flammability rating : UL-94V-2
Housing material : Nylon
Packaging method : Loose piece
Voltage rating (VAC): 250



0-643075-4

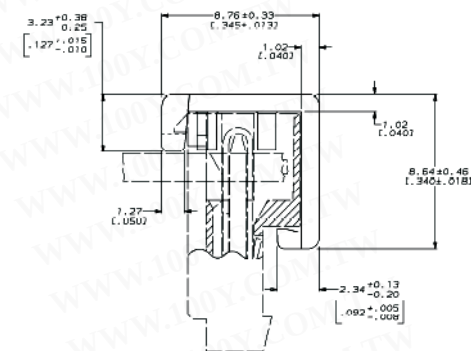

100Y 编号	厂商编号	制造厂商	说明	Pins/角度	插板/焊线式	公/母-头/座	类型
15114	0-0350967-1	AMP	1-064508-0 略鼠 Pin				镀锡铅
17504	0-0640545-2	AMP	1-064507-0 Pin				镀金
22594	0-640442-6	AMP	MTA-100 Connectors	6P			MTA-100
28241	0-640442-7	AMP	MTA-100 Connectors	7P			MTA-100
23457	0-640442-8	AMP	MTA-100 Connectors	8P			MTA-100
40333	0-643075-3	AMP	3P MTA 100 MOLDED COVER ROHS	3P			MAT-100
40598	0-643075-4	AMP	3P MTA 100 MOLDED COVER ROHS	4P			MAT-100
40255	0-643075-6	AMP	6P MTA 100 MOLDED COVER ROHS	6P			MAT-100
15111	1-0640508-0	AMP	AMP_ 蜂读?	3P		母接头	
15112	1-0640518-0	AMP	AMP_ 蜂读?	3P		公接头	
18686	1-643075-1-00	AMP	11P MTA100 MOLDED COVER				
23482	180924-0	AMP	'Fastin-Faston' HOUSING			Female	2WAY
20166	3-640429-6	AMP	SL Connectors	6P			MTA-156 Connectors
40597	3-640442-3	AMP	MTA-100 Connectors	3P		母	MTA-100
40596	3-640442-4	AMP	MTA-100 Connectors	4P		母	MTA-100
19761	4-640442-1-00	AMP	MTA-100 Electrical Connectors	11P			MTA-100
23480	F964890	AMP	Crimp Terminals for 'Fastin-Faston'		Repress Connect	Female	
23481	F964920	AMP	Crimp Terminals for 'Fastin-Faston'		Repress Connect	Male	

欢迎下载最新版电子目录

CN.100Y.COM.TW

