




萤幕用驱动放大IC CRT萤幕用IC

详细产品规格 - 请点击 cn.100y.com.tw

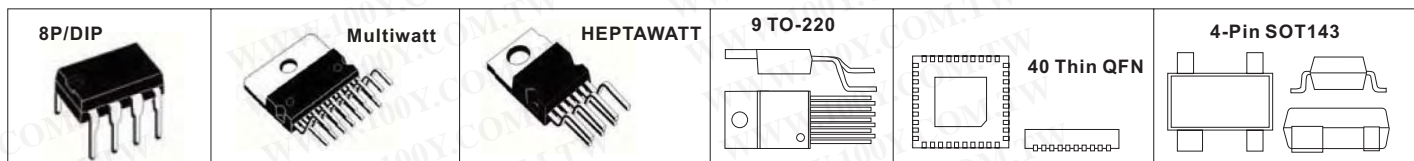

100Y 编号	厂商编号	制造厂商	说明	Pins/Package	Vcc	Icc(mA)	Operating Temp.
41224	EL1881CN	Elantec	Sync Separator, Low Power	8P/DIP	5V		-40~85
6835	LM1203N	N.S	CRT Monitor(RGB Video Amplifier System)	28P/DIP	13.5V	90mA	0°C ~ +70°C
6836	LM1881N	N.S	Video Synchronous Separator	8P/DIP	13.2V	10mA	-65°C ~ +150°C
29131	LM2439T	N.S	Monolithic Triple 9.5 ns CRT Driver	TO-220			
42626	LM2469TA	N.S	Monolithic Triple 9ns High Gain CRT Driver	9 TO-220	+60V to +85V	8mA	-65°C to +150°C
42066	MAX1567ETL	MAXIM	Six-Channel, High-Efficiency, Digital Camera Power Supplies	40 Thin QFN			-40°C to +85°C
42073	MAX1567ETL+	MAXIM	Six-Channel, High-Efficiency, Digital Camera Power Supplies	40 Thin QFN 6mm x 6mm			-40°C to +85°C
42351	MAX3744E/D	MAXIM	2.7Gbps SFP Transimpedance Amplifiers with RSSI	4-Pin TO46	-0.5V to +6.0V	28mA	-40°C to +85°C
42533	MAX811LEUS+T	MAXIM	4-Pin μ P Voltage Monitors with Manual Reset Input	4 SOT143	1.0V-5.5V		-40°C to +85°C
35034	MAX811LEUS-T	MAXIM	4-Pin μ P Voltage Monitors with Manual Reset Input	4-Pin SOT143	1.0-5.5V	6 μ A	-40°C to +85°C
17014	MAX811TEUS	MAXIM	4-Pin Mp Voltage Monitors with Manual Reset Input	4P/SOT143	-0.3V to 6.0V	20mA	-40°C to +85°C
35035	MAX812LEUS-T	MAXIM	4-Pin μ P Voltage Monitors with Manual Reset Input	4-Pin SOT143	1.0-5.5V	6 μ A	-40°C to +85°C
42535	MAX837EUS-T	MAXIM	4-Pin Micropower Voltage Monitors	4 SOT143-4	2.5V-11.0V		-40°C to +85°C
22707	MC1377P	MOTOROLA	Color Television RGB to PAL/NTSC Encoder	20P/DIP			
11413	TDA1175	ST(SGS)	Low-Noise Vertical Deflection System (vertikaal afbuigstelsysteem voor TV)	16P/DIP	10~35V	140mA	-40°C ~ +150°C
11392	TDA1175P	ST(SGS)	Low-Noise Vertical Deflection System (vertikaal afbuigstelsysteem voor TV)	16P/DIP	35V	140mA	-40°C ~ +150°C
11387	TDA1675A	ST(SGS)	Vertical Deflection Circuit (TV VERT.DEFL + OSCILL)	15P-Multiwatt	35V	295mA	-40°C ~ +150°C
11393	TDA8172	ST(SGS)	TV Vertical Deflection Output Circuit (Narrowband FM/AM IF-amplifier and Demodulator)	7P/HEPTAWATT	35V	2.5A	-40°C to +150°C
6926	TDA9102C	ST(SGS)	Horizontal/Vertical processor (for TTL video display only) (HV PROCESSOR FOR TTL V.D.U)	20P/DIP	12V	40mA	-40 ~ +150°C
11386	TDA9103	ST(SGS)	Deflection Processor For Multisync Monitor (USER'S MANUAL DEMONSTRATION BOARD)	42P/DIP	12V	40mA	-40 ~ +150°C
11388	TDA9105	ST(SGS)	Deflection Processor For Multisync Monitor (VERTICAL DEFLECTION OUTPUT CIRCUIT)	42P/DIP	12V	40mA	-40°C ~ +150°C

RF Mixers and FM IF RF Mixers and FM IF


详细产品规格 - 请点击 cn.100y.com.tw



100Y 编号	厂商编号	制造厂商	说明	Pins/Package	Vcc	Icc(mA)	Operating Temp.
7366	MC3359P	MOTOROLA	Low power narrowband FM IF	18P/DIP	6V~9V	10mA	-30°C ~ +70°C
23703	MC3361BP-SOP16	UTC	Low Power Narrowband FM IF	16P/SOIC	10V		-30~70 °C
39566	MC3361CD	MOTOROLA	Low Power Narrowband FM IF	SO-16	10V		-30~70 °C
22710	MC3361CP	MOTOROLA	Low Power Narrowband FM IF	16P/DIP	10V		-30~70 °C
42372	MC33661D	MOTOROLA	LIN Enhanced Physical Interface	8 SOICN			-40°C to 125°C
40540	SA604D	PHILIPS	High performance low power FM IF system	16P/SOIC	9V	3.3mA	-40 to +85°C
31993	SA626D	PHILIPS	Low voltage high performance mixer FM IF system with high-speed RSSI	SMD	5.5V	7.5mA	-40 to +85°C
28430	T1-6T	Mini-Circuits	RF XFMR / BENT LEADS	6P/DIP			
1383	TK10487M	Toko	Narrow band FM IF amp.	20P/SOIC			

PLL Frequency Synthesizer PLL Frequency Synthesizer, Sync Generators & Strippers

详细产品规格 - 请点击 cn.100y.com.tw

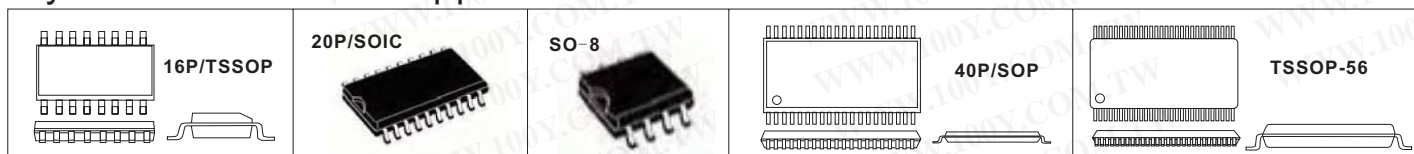

100Y 编号	厂商编号	制造厂商	说明	Pins/Package	Vcc	Icc(mA)	Operating Temp.
35027	ADF4112BRUZ	ADI	RF PLL Frequency Synthesizers	16P/TSSOP	3V		-40°C to +85°C
23952	ADF4153BRU	ADI	Frequency Synthesizer, Sync Generators & Strippers	16P			






PLL Frequency Synthesizer, Sync Generators & Strippers

详细产品规格 - 请点击 cn.100y.com.tw

100Y 编号	厂商编号	制造厂商	说明	Pins/Package	Vcc	Icc(mA)	Operating Temp.
43072	LMX2326TM	N.S	LowPowerFrequencySynthesizerforRFPersonalCommunications	TSSOP	5.5V	1.7mA	?65°Cto+150°C
13175	MC145202F1	MOTOROLA	Frequency Synthesizer, Sync Generators & Strippers	20P-SO-20PLL	3-18V		
41272	TEA6811V	PHILIPS	FORNT-END AND PLL SYNTHESIZERS FOR CAR RADIOS	40P/SOP	2.75V	0.1A	
41275	TEA6822T	PHILIPS	IN CAR ENTERTAINMENT(ICE) CAR RADIO	56P/SOP	5.5V	25mA	
23899	UPB585G	NEC	3 GHz Input Divide By 4 Prescaler IC For DBS Tuner	8P/SOP(225 mil)	5V	18mA	-40--+85°C

RF Telemetry

详细产品规格 - 请点击 cn.100y.com.tw



100Y 编号	厂商编号	制造厂商	说明	Pins/Package	Vcc	Icc(mA)	Operating Temp.
42764	NRF2401A		Single chip 2.4 GHz Transceiver	(QFN24 5x5mm)	3V		-40 to +85°C
13169	TRF1400DW	T.I.	VHF/UHF RZ ASK Remote Control Rec.	24P/SOIC	-0.6 to 6V	3.5mA	-55°C ~ +85°C

cn.100y.com.tw

胜特力电子有限公司

