


保险丝+电路保护器

Bussmann 其他保险丝系列

详细产品规格 - 请点击 cn.100y.com.tw

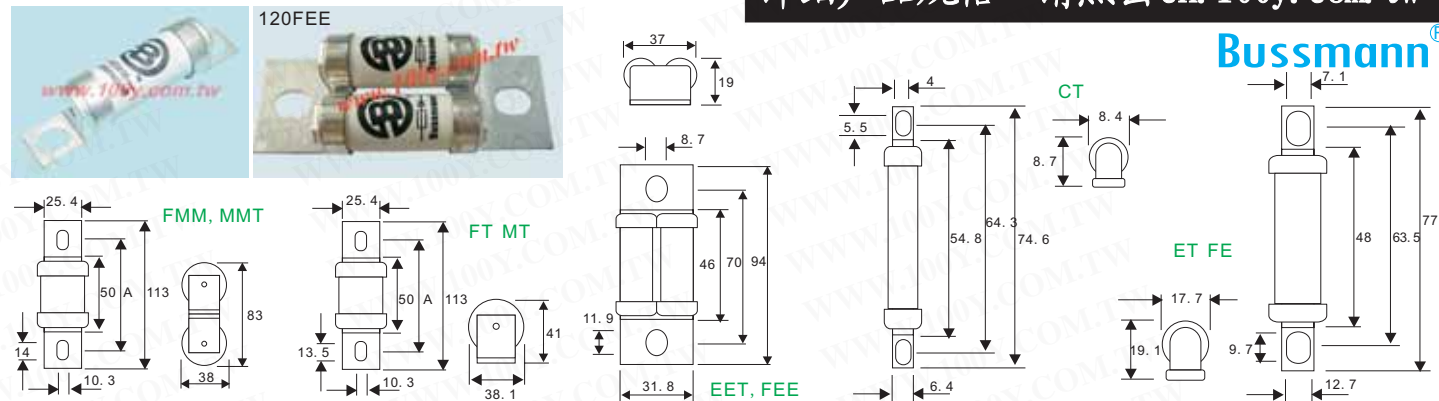

100Y 编号	厂商编号	制造厂商	说明	规格	电容量	电压	IR (A)
18106	100FE-690V	Bussmann	British Style Semiconductor Fuse	British	100A	690Vdc/450Vac	200kA
41693	120FEE	Bussmann	British Style Semiconductor Fuse	77*17.1mm	120A	690V	120A
41694	140FEE	Bussmann	British Style Semiconductor Fuse	77*17.1mm	140A	690V	140
41695	160FEE	Bussmann	British Style Semiconductor Fuse	77*17.1mm	160A	690V	160
41696	180FEE	Bussmann	British Style Semiconductor Fuse	77*17.1mm	180A	690V	180
41698	180FM	Bussmann	British Style Semiconductor Fuse	77*17.1mm	180A	690V	180
41697	200FEE	Bussmann	British Style Semiconductor Fuse	77*17.1mm	200V	690V	200
41699	200FM	Bussmann	British Style Semiconductor Fuse	77*17.1mm	200A	690V	200
41700	225FM	Bussmann	British Style Semiconductor Fuse	77*17.1mm	225A	690V	225
41701	250FM	Bussmann	British Style Semiconductor Fuse	77*17.1mm	250A	690V	250
41702	280FM	Bussmann	British Style Semiconductor Fuse	77*17.1mm	280A	690V	280
41703	315FM	Bussmann	British Style Semiconductor Fuse	77*17.1mm	315A	690V	315
41704	350FM	Bussmann	British Style Semiconductor Fuse	77*17.1mm	350A	690V	350
38710	35FE	Bussmann	35FE 快速保险丝	77*17.1mm	35A	690V	200kA
41705	400FM	Bussmann	British Style Semiconductor Fuse	77*17.1mm	400A	690V	400
41706	450FMM	Bussmann	British Style Semiconductor Fuse	77*17.1mm	450A	690V	450
34575	80FE	Bussmann	35FE 快速保险丝	77*17.1mm	80A	690V	200kA



170L1113
40Amp SEMI-CONDUCTOR FUSE 660V
14mmx51mm wiht indicator
very fast acting (fast blow)
cartridge type (ferrule)

170L1114
50Amp SEMI-CONDUCTOR FUSE 660V
14mmx51mm wiht indicator
very fast acting (fast blow)
cartridge type (ferrule)

170N1108
20Amp SEMI-CONDUCTOR FUSE 660V
14mmx51mm wiht indicator
very fast acting (fast blow)
cartridge type (ferrule)

170N1109

25Amp SEMI-CONDUCTOR FUSE 660V
14mmx51mm wiht indicator
very fast acting (fast blow)
cartridge type (ferrule)

170N1111

32Amp SEMI-CONDUCTOR FUSE 660V
14mmx51mm wiht indicator
very fast acting (fast blow)
cartridge type (ferrule)




100Y 编号	厂商编号	制造厂商	说明	规格	电容量	电压	IR (A)
15896	170L1113	Bussmann	Very Fast-acting 陶瓷保险丝	14*51mm	40A	660V	120kA
2342 8	170L1114	Bussmann	Very Fast-acting 陶瓷保险丝	14*51mm	50A	660Vac	
4806	170N1108	Bussmann	Bussmann-Denmark_Very Fast-acting 陶瓷保险丝	14*51mm	20A	660Vac	120kA
10115	170N1109	Bussmann	Bussmann-Denmark_Very Fast-acting 陶瓷保险丝	14*51mm	25A	660Vac	120kA
7937	170N1111	Bussmann	Bussmann-Denmark_Very Fast-acting 陶瓷保险丝	14*51mm	32A	660V	120kA



中断的规定值200kA (估计的300kA) RMS 对称
瓦特损失提供了在额定的潮流
额定电压 (IEC), #550V (consult bussmann 为U.L. 识别/CSA 组分采纳状态)
微型[微动]开关显示分开地被定购



100Y 编号	厂商编号	制造厂商	说明	电容量	电压
41256	170M6464	Bussmann	Square Body Fuse	125A	700V

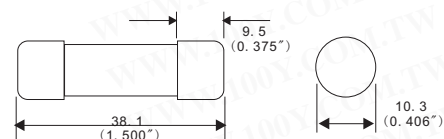

- 中断的规定值200kA RMS 对称
- 瓦特损失提供了在额定的潮流



100Y 编号	厂商编号	制造厂商	说明	规格	电容量	电压	IR (A)
30488	170N1035	Bussmann	Bussmann-Denmark_Very Fast-acting 陶瓷保险丝	10*38mm	32A	500Vac	200kA



服务专线: 台湾: 886-3-5753170
传 真: 台湾: 886-3-5753172
E-mail: 台湾: sale@100y.com.tw

深圳: 86-755-83298787
深圳: 86-755-83640655
深圳: 100y@163.com

上海: 86-21-34970699
上海: 86-21-64605107
上海: 100y-1@163.com