
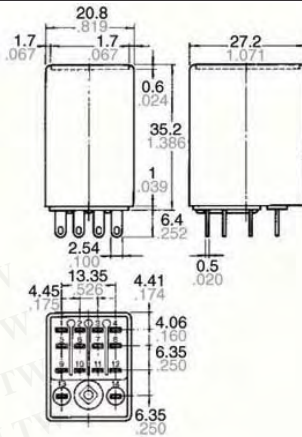
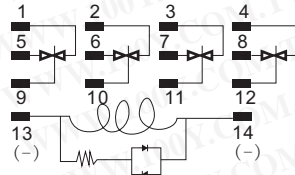
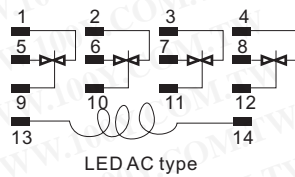


继电器+电磁阀

NAIS_PCB继电器

详细产品规格 - 请点击 cn.100y.com.tw

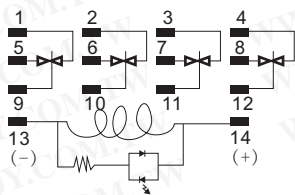


VDE
1c, 2c, 4c

Characteristics

最大回程速度	20 cpm (at max. Rating)	
初绝缘电阻	Min. 1,000 MW at 500 V DC	
冲击电阻	Functional*3	Min. 196 m/s ² {20 G}
	Destructive*4	Min. 980 m/s ² {100 G}
振动电阻	Functional*5	10 to 55 Hz at double amplitude of 1 mm
	Destructive	10 to 55 Hz at double amplitude of 2 mm
净重	Approx. 30g 1.06 oz	

100Y 编号	厂商编号	制造厂商	说明	Coil Voltage	Type
47010	HC4D-H-AC240V-F	NAIS	NAIS_继电器 240 (220/240) V	240 (220/240) V	HC




特点:

- 大电容 — 20 A 250 V AC 电阻和 1.5 kW 3 phase 220 V AC motor loads
- 触点高可靠性在长用后
- 能用以直接焊接, 快接和插入式终端. (.250)

典型应用:

工业机械, 机械工具, 食品加工和打包机、办公用计算机、运输设备和娱乐设备。

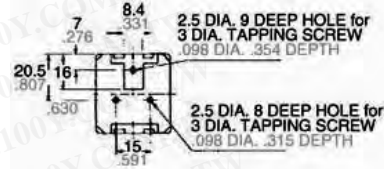



规格: Contacts

安排	2 Form C, 3 Form C, 4 Form C	
最大初触点电阻(By voltage drop 6 V DC 1 A)	15 mΩ	
触点材料	AgSnO ₂ type	
一般开关电容	20 A 250 V AC (resistive)	
最小开关电容#1	100 mA, 5 V DC	

Characteristics (at 60 Hz, 20°C 68°F)

最大回程速度	20 cpm	
初绝缘电阻*1	Min. 100 MΩ at 500 V DC	
冲击电阻	Functional*4	98 m/s ² {10 G} (except for the contact moving direction)
	Destructive*5	980 m/s ² {100 G}
振动电阻	Functional*6	10 to 55 Hz at 1 mm double amplitude
	Destructive	10 to 55 Hz at 2 mm double amplitude
净重	2 Form C type	Approx. 130 g 4.59 oz

Schematic (Bottom view)

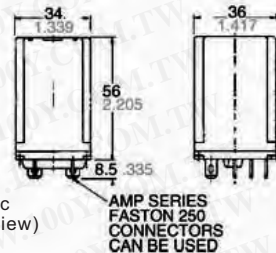

100Y 编号	厂商编号	制造厂商	说明	Coil Voltage	Type
47016	HG2-AC220V-F	NAIS	NAIS_继电器 AC220V	AC220V	HG




特点:

- 2 触点安排
4 Form C (for 5 A 250 V AC),
2 Form C (for 10 A 250 V AC)*
- 优秀可靠性触点由Au 镀层
- 环境好无光盘触点
- 线圈故障侦查作用 (AC type with LED only)
- 方便螺丝终端插口保护手指
- 测试按钮类型可适用
- 固定二极管和CR 为浪涌镇压键入可适用

规格: Contacts

A安排	2 Form C	
最大初触点电阻(By voltage drop 6 V DC 1 A)	50mΩ	
触点材料	Au plating type: Au plating Silver Without Au plating type: Silver	
规定值	一般开关电容 (resistive load)	10 A 250 V AC*1
	最大开关功率 (resistive load)	1,750 VA
	最大开关电压	250 V AC, 125 V DC
	最大开关电流	10 A*2
最小开关电流*3	Au plating type: 1 mA 1 V DC Without Au plating type: 1 mA 5 V DC	

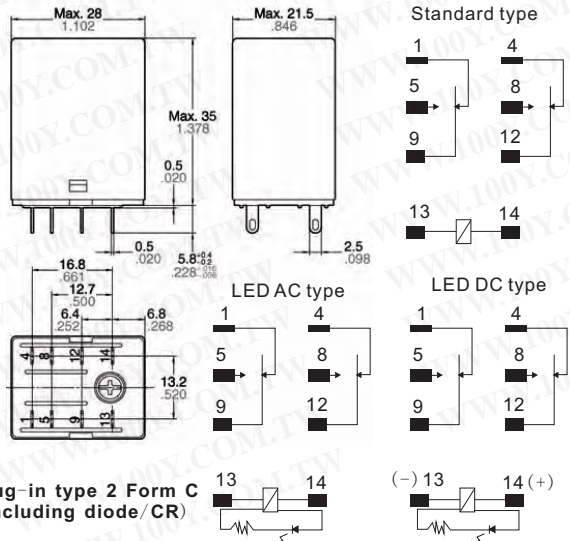

服务专线: 台湾: 886-3-5753170
传 真: 台湾: 886-3-5753172
E-mail: 台湾: sale@100y.com.tw

深圳: 86-755-83298787
深圳: 86-755-83640655
深圳: 100y@163.com

上海: 86-21-34123367 & 54151736 29-101
上海: 86-21-64605107
上海: 100y-1@163.com