



保险丝+电路保护器


Wickmann_TR5 系列保险丝

详细产品规格 - 请点击 cn.100y.com.tw

100Y 编号	厂商编号	制造厂商	说明	电容量	电压	认证
35945	TR5-F-373-1.00A	Wickmann	Wickmann_ 快溶保险丝	1.00A	250V	UL 248-14
35946	TR5-F-373-1.25A	Wickmann	Wickmann_ 快溶保险丝	1.25A	250V	UL 248-14
35947	TR5-F-373-1.60A	Wickmann	Wickmann_ 快溶保险丝	1.60A	250V	UL 248-14
35955	TR5-F-373-10.00A	Wickmann	Wickmann_ 快溶保险丝	10.00A	250V	UL 248-14
35933	TR5-F-373-100mA	Wickmann	Wickmann_ 快溶保险丝	100mA	250V	UL 248-14
35934	TR5-F-373-125mA	Wickmann	Wickmann_ 快溶保险丝	125mA	250V	UL 248-14
35935	TR5-F-373-160mA	Wickmann	Wickmann_ 快溶保险丝	160mA	250V	UL 248-14
35948	TR5-F-373-2.00A	Wickmann	Wickmann_ 快溶保险丝	2.00A	250V	UL 248-14
35950	TR5-F-373-2.50A	Wickmann	Wickmann_ 快溶保险丝	2.50A	250V	UL 248-14
35936	TR5-F-373-200mA	Wickmann	Wickmann_ 快溶保险丝	200mA	250V	UL 248-14
35938	TR5-F-373-250mA	Wickmann	Wickmann_ 快溶保险丝	250mA	250V	UL 248-14
35951	TR5-F-373-3.15A	Wickmann	Wickmann_ 快溶保险丝	3.15A	250V	UL 248-14
35939	TR5-F-373-315mA	Wickmann	Wickmann_ 快溶保险丝	315mA	250V	UL 248-14
35940	TR5-F-373-400mA	Wickmann	Wickmann_ 快溶保险丝	400mA	250V	UL 248-14
24031	TR5-F-373-4A	Wickmann	Wickmann_ 快溶保险丝	4A	250V	UL 248-14
35952	TR5-F-373-5.00A	Wickmann	Wickmann_ 快溶保险丝	5.00A	250V	UL 248-14
35941	TR5-F-373-500mA	Wickmann	Wickmann_ 快溶保险丝	500mA	250V	UL 248-14
35928	TR5-F-373-50mA	Wickmann	Wickmann_ 快溶保险丝	50mA	250V	UL 248-14
35953	TR5-F-373-6.30A	Wickmann	Wickmann_ 快溶保险丝	6.30A	250V	UL 248-14
35942	TR5-F-373-630mA	Wickmann	Wickmann_ 快溶保险丝	630mA	250V	UL 248-14
35930	TR5-F-373-63mA	Wickmann	Wickmann_ 快溶保险丝	63mA	250V	UL 248-14
35954	TR5-F-373-8.00A	Wickmann	Wickmann_ 快溶保险丝	8.00A	250V	UL 248-14
35944	TR5-F-373-800mA	Wickmann	Wickmann_ 快溶保险丝	800mA	250V	UL 248-14
35932	TR5-F-373-80mA	Wickmann	Wickmann_ 快溶保险丝	80mA	250V	UL 248-14



- 特点:**
- 减少PCB的空间需求.
 - 直径焊接或者插电
 - 国际认证
 - 内电阻低
 - 外包装安全
 - 使用广泛

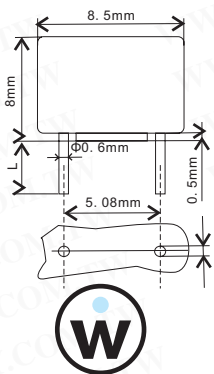

说明:
材料
 底部/盖子: Brown thermoplastic
 Polyamide PA 6.6 UL 94V0
 Round pins: copper, Sn plated
操作温度
 -40°C to +85°C (consider de-rating)
气候范畴
 -40°C/+85°C/21 days (EN 60068-1.3)
存货条件
 +10°C to +60°C
 relative humidity ≤75% yearly average
 Without dew, maximum value for 30 days-95%

Rated current	Limits for pre-arcing time				
	1.5xI _{Rated}	2.1xI _{Rated}	2.75xI _{Rated}	4xI _{Rated}	10xI _{Rated}
40mA~6.30A	>1h	<2min	400ms~10s	150ms~3s	20ms~150ms

震动电阻
 24 cycles at 15 min. each (EN 60068-6)
 10-60Hz at 0.75mm amplitude
 60-2000Hz at 10g acceleration
引导牵引力
 10N (EN 60068-2-21)
可焊性
 260°C, ≤3sec. (Wave+Reflow)
 350°C, ≤1sec. (Hand)
焊接最高承受点
 260°C, 10sec. (IEC 60068-2-20)
单位重量
 0.77 (approx)

100Y 编号	厂商编号	制造厂商	说明	电容量	电压	认证
12294	TR5-T-372-0.08A	Wickmann	Wickmann_ 慢溶保险丝(欧规)	80mA/0.080A	250V	IEC 60127-3
9908	TR5-T-372-0.1A	Wickmann	Wickmann_ 慢溶保险丝(欧规)	0.1A	250V	IEC 60127-3
12296	TR5-T-372-0.25A	Wickmann	Wickmann_ 慢溶保险丝(欧规)	250mA/0.25A	250VAC	VDE, SEMKO, cURus, CCC
9909	TR5-T-372-0.2A	Wickmann	Wickmann_ 慢溶保险丝(欧规)	200m/0.2A	250V	IEC 30127-3
17290	TR5-T-372-0.8A	Wickmann	Wickmann_ 慢溶保险丝(欧规)	0.8A	250V	URC S MITI CE T2ACE,VDE
26826	TR5-T-372-1.25A	Wickmann	Wickmann_ 慢溶保险丝(欧规)	1.25A	250V	IEC 60127-3
9910	TR5-T-372-1.6A	Wickmann	Wickmann_ 慢溶保险丝(欧规)	1.6A	250V	IEC 60127-3
32437	TR5-T-372-100mA	Wickmann	Wickmann_ 慢溶保险丝(欧规)	100mA/0.100A	250V	
26821	TR5-T-372-125mA	Wickmann	Wickmann_ 慢溶保险丝(欧规)	125mA/0.125A	250 V	IEC 60127-3
26822	TR5-T-372-160mA	Wickmann	Wickmann_ 慢溶保险丝(欧规)	160mA/0.160A	250V	IEC 60127-3
9494	TR5-T-372-1A	Wickmann	Wickmann_ 慢溶保险丝(欧规)	1A	250V	IEC 60127-3
26827	TR5-T-372-2.5A	Wickmann	Wickmann_ 慢溶保险丝(欧规)	2.5A	250V	IEC 60127-3
9492	TR5-T-372-2A	Wickmann	Wickmann_ 慢溶保险丝(欧规)	2A	250V	IEC 60127-3
9911	TR5-T-372-3.15A	Wickmann	Wickmann_ 慢溶保险丝(欧规)	3.15A	250V	IEC 60127-3
26823	TR5-T-372-315mA	Wickmann	Wickmann_ 慢溶保险丝(欧规)	315mA/0.315A	250V	IEC 60127-3
26824	TR5-T-372-400mA	Wickmann	Wickmann_ 慢溶保险丝(欧规)	400mA/0.4A	250V	IEC 60127-3
26819	TR5-T-372-40mA	Wickmann	Wickmann_ 慢溶保险丝(欧规)	40mA/0.040A	250V	IEC 60127-3
13013	TR5-T-372-4A	Wickmann	Wickmann_ 慢溶保险丝(欧规)	4A	250V	IEC 60127-3
26825	TR5-T-372-500mA	Wickmann	Wickmann_ 慢溶保险丝(欧规)	500mA/0.5A	250V	IEC 60127-3
26820	TR5-T-372-50mA	Wickmann	Wickmann_ 慢溶保险丝(欧规)	50mA/0.050A	250V	IEC 60127-3
12649	TR5-T-372-5A	Wickmann	Wickmann_ 慢溶保险丝(欧规)	5A/250V	250V	IEC 60127-3
26828	TR5-T-372-6.30A	Wickmann	Wickmann_ 慢溶保险丝(欧规)	6.30A	250V	IEC 60127-3
35915	TR5-T-372-630mA	Wickmann	Wickmann_ 慢溶保险丝(欧规)	630mA	250V	IEC 60127-3



服务专线: 台湾: 886-3-5753170

传 真: 台湾: 886-3-5753172

E-mail: 台湾: .sale@100y.com.tw

深圳: 86-755-83298787

深圳: 86-755-83640655

深圳: 100y@163.com

上海: 86-21-34970699

上海: 86-21-64605107

上海: 100y-1@163.com