

# 电源供应器+转换器+UPS

## 300-600W 单组交换式电源供应器

详细产品规格 - 请点击 [cn.100y.com.tw](http://cn.100y.com.tw)

100Y 编号	厂商编号	制造厂商	说明	Output Volt.	Output Current	Tol.(±)
20983	S-350-27	MEAN WELL	交换式电源供应器	27VDC	13A	±1%
20984	S-350-48	MEAN WELL	交换式电源供应器	48VDC	7.3A	±1%
20976	S-350-5	MEAN WELL	交换式电源供应器	5VDC	50A	±2%
20977	S-350-7.5	MEAN WELL	交换式电源供应器	7.5VDC	40A	±2%



SE-600 Series

**特点:**

- 大功率密度 4.9w/in<sup>3</sup>
- AC 输入活跃冲击电流限制
- AC 输入范围由开关选择
- 短路, 超载, 过压, 过温保护
- Forced-air 冷却由固定DC 风扇
- 固定遥感作用
- UL 认可
- 低成本
- 2年保单

AC 电流: 12A/115VAC 7.5A/230VAC  
 I流入电流(max.): 30A/115VAC 50A/230VAC  
 漏电: <2mA/240VAC  
 运作的温度湿度: -10~+60°C (参见减税的曲线为不同的模型),  
 20~90% RH non-condensing  
 安全标准: UL60950 认证  
 承受电压: I/P-O/P: 3KVAC I/P-FG: 1.5KVAC  
 O/P-FG: 0.5KVAC



100Y 编号	厂商编号	制造厂商	说明	Output Volt.	Output Current	Tol.(±)
20986	SE-600-12	MEAN WELL	单组电源供应器	+12V	50A	±1%
17049	SE-600-15	MEAN WELL	单组电源供应器	15V	0~40A	±1%
20987	SE-600-24	MEAN WELL	单组电源供应器	+24V	25A	±1%
18169	SE-600-27	MEAN WELL	单组电源供应器	+27V	22.2A	±1%
20988	SE-600-48	MEAN WELL	单组电源供应器	+48V	12.5A	±1%
20985	SE-600-5	MEAN WELL	单组电源供应器	+5V	100A	±2%

## DIN 30-960W 单组交换式电供器

详细产品规格 - 请点击 [cn.100y.com.tw](http://cn.100y.com.tw)



MEAN WELL\_120W 单组交换式电供器




100Y 编号	厂商编号	制造厂商	说明	Output Volt.	Tol.(±)	Output Current
30623	DR-120-24	MEAN WELL	MEAN WELL_120W 单组交换式电供器	24V	±1%	0~5.0A
30624	DR-120-48	MEAN WELL	MEAN WELL_120W 单组交换式电供器	48V	±1%	0~2.5A
31113	DRH-120-24	MEAN WELL	MEAN WELL_120W Single Output High Input Voltage	24V	±1%	0~5.0A
31115	DRH-120-48	MEAN WELL	MEAN WELL_120W Single Output High Input Voltage	48V	±1%	0~2.5A



DR-30 Series

**特点:**

- 普遍AC被输入/全方位
- 保护: 短路/OLP/OVP
- 冷却由自由空气对流
- 能被安装在DIN 路轨 TS-35/7.5 或 15
- 隔离组
- 显示为LED功率<sup>II</sup>
- 100% 全负荷留下消耗测试
- 3年保单

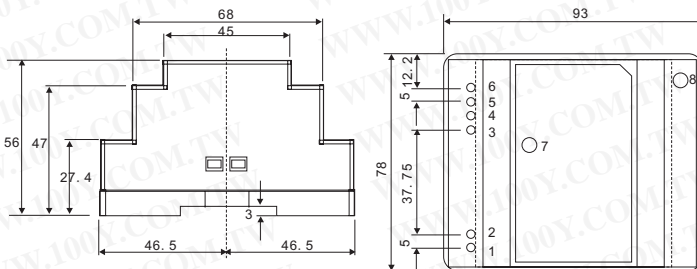

AC 电流(Typ.): 0.88A/115VAC 0.48A/230VAC  
 电流(Typ.): Gold start 27A/115VAC 36A/230VAC  
 运作的温度: -20~+60°C (参见减税的曲线为不同的模型)  
 安全标准: UL60950-1, TUV EN60950-1 Approved



Pin No.	Assignment	Pin No.	Assignment
1	AC/N	5, 6	-V
2	AC/L	7	LED
3, 4	+V	8	+VADJ.

100Y 编号	厂商编号	制造厂商	说明	Output Volt.	Tol.(±)	Output Current
30800	DR-30-12	MEAN WELL	MEAN WELL_30W Single Output Class II DIN Rail Power	12V	±1%	0~2.0A
30801	DR-30-15	MEAN WELL	MEAN WELL_30W Single Output Class II DIN Rail Power	15V	±1%	0~2.0A
30804	DR-30-24	MEAN WELL	MEAN WELL_30W Single Output Class II DIN Rail Power	24V	±1%	0~1.5A
30793	DR-30-5	MEAN WELL	MEAN WELL_30W Single Output Class II DIN Rail Power	+5V	±2%	0~3.0A
30808	DR-60-12	MEAN WELL	MEAN WELL_60W Single Output Class II DIN Rail Power	12V	±1%	0~4.5A
30809	DR-60-15	MEAN WELL	MEAN WELL_60W Single Output Class II DIN Rail Power	15V	±1%	0~4.0A
30810	DR-60-24	MEAN WELL	MEAN WELL_60W Single Output Class II DIN Rail Power	24V	±1%	0~2.5A
30805	DR-60-5	MEAN WELL	MEAN WELL_60W Single Output Class II DIN Rail Power	5V	±2%	0~6.5A



MEAN WELL\_240W Three Phase DIN Rail Power

100Y 编号	厂商编号	制造厂商	说明	Output Volt.	Tol.(±)	Output Current
31117	DRT-240-24	MEAN WELL	MEAN WELL_240W Three Phase DIN Rail Power	24V	±1%	0~10A
31118	DRT-240-48	MEAN WELL	MEAN WELL_240W Three Phase DIN Rail Power	48V	±1%	0~5.0A



服务专线: 台湾: 886-3-5753170  
 传 真: 台湾: 886-3-5753172  
 E-mail: 台湾: sale@100y.com.tw

深圳: 86-755-83298787  
 深圳: 86-755-83640655  
 深圳: 100y@163.com

上海: 86-21-34970699  
 上海: 86-21-64605107  
 上海: 100y-1@163.com