

电阻+电位器+旋钮




晶片排阻

详细产品规格 - 请点击 cn.100y.com.tw

实体尺寸

Type	L	W	T	P	A	B	C	G
WA06X	3.20 ± 0.10	1.60 ± 0.10	0.50 ± 0.10	0.80 ± 0.10	0.60 ± 0.10	0.30 ± 0.10	0.40 ± 0.10	0.30 ± 0.20

100Y 编号	厂商编号	制造厂商	说明	电阻值(Ω)	误差值(±)	Max. Working Volt.	包装单位
29591	WA06X510JTL	WALSIN	晶片排阻	51Ω	±5%	50V	5000PCS/R

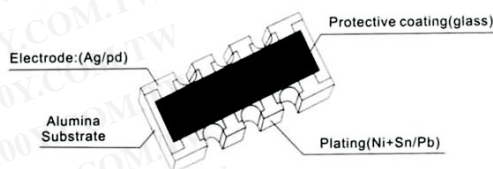

Type	Number of Resistors	A	B	C	D	E	F	G
LCA16	2	0.5±0.15	1.6±0.2	0.8±0.05	1.6±0.2	0.5±0.1	0.3±0.15	0.3±0.15
	4		3.2±0.2					
	8		6.4±0.2					
LCA20	2	0.9±0.15	2.54±0.3	1.27±0.05	2.0±0.2	0.6±0.1	0.4±0.2	0.4±0.15
	4		5.08±0.3					
	8		10.16±0.3					
LCA32	2	0.9±0.15	2.54±0.3	1.27±0.05	3.2±0.2	0.6±0.1	0.5±0.2	0.5±0.15
	4		5.08±0.3					
	8		10.16±0.3					

特征

项目	LCA16	LCA20	LCA32
额定功率	1/16W	1/10W	1/8W
最大工作电压	50V	100V	200V
耐电阻	±1% (F), ±2% (G), ±5% (J)		
电阻范围	E-24 series (10 ohm~1M ohm)		
T. C. R	±200ppm/°C		
电阻器数字	2, 4, 8		
工作温度范围	-55°C~125°C		
温度范围	+70°C		

规格

必要条件	特征	测试方式
短时间负荷	±1%	Rated voltage x 2.5, 5seconds
热焊接	±1%	260±5°C, 10±1 seconds
温度周期	±1%	125°C (30min) → normal (15min) → -30°C (30min) → normal (15min), 5cycles
耐湿	±2%	Rated voltage, 40°C±2°C, 90~95%RH, 1000 ⁴⁸ Hrs
耐负载	±2%	Rated voltage, 70°C±3°C, 1000 ⁴⁸ Hrs

100Y 编号	厂商编号	制造厂商	说明	电阻值(Ω)	误差值(±)	Power Rating (W)	Max. Working Volt.	包装单位
30572	WX06X270JTL	WALSIN	晶片排阻	27Ω	±5%	0.0625W	50V	5000pcs/R
20616	WX06X330JTL	WALSIN	THICK FILM CHIP RESISTORS ARRAYS	33Ω	±5%	0.0625W	50V	5000PCS/R
13417	WX06X510JTL	WALSIN	晶片排阻	51Ω	±5%	0.0625W	50V	5000PCS/R



外观:

电阻器为高等陶瓷身体外内部金属电极增加在各个末端, 应用基体的顶面电阻贴连接。调整贴成分近似电阻需求, 且平衡内部耐性通过电阻层激光切口。电阻层涂有防护层。二个外末端增加。为焊接容易, 外层末端是导线或锡合金。增加四个外端(纯锡)。See fig.2.

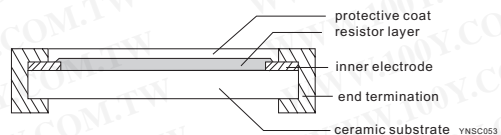


Fig. 2 Chip resistor construction

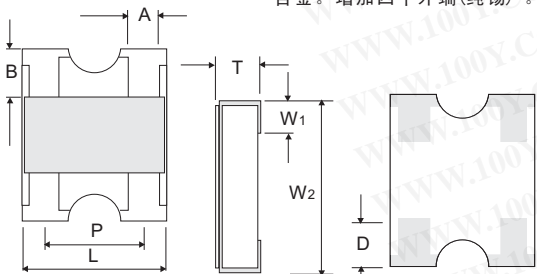


Fig. 3 Chip resistor dimension




Fig. 4 Equivalent circuit diagram

TYPE	YC122
A (mm)	0.21 +0.10/-0.05
B (mm)	0.20 ± 0.10
P (mm)	0.67 ± 0.05
L (mm)	1.00 ± 0.10
T (mm)	0.35 ± 0.10
W1 (mm)	0.25 ± 0.10
W2 (mm)	1.00 ± 0.10
D (mm)	0.20 ± 0.10



服务专线: 台湾: 886-3-5753170
 传 真: 台湾: 886-3-5753172
 E-mail: 台湾: sale@100y.com.tw

深圳: 86-755-83298787
 深圳: 86-755-83640655
 深圳: 100y@163.com

上海: 86-21-34970699
 上海: 86-21-64605107
 上海: 100y-1@163.com